

MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS-1963-A

٠

.

. .

# OTIC FILE COPY

# NAVAL POSTGRADUATE SCHOOL

Monterey, California



## **THESIS**

APL TUTOR:

AN ON-LINE INSTRUCTIONAL FACILITY

by

Katherine S. Lanes

December 1983

Thesis Advisor:

R. R. Read

Approved for public release; distribution unlimited


84 04 13 117,

| REPORT DOCUMENTATION PAGE   | READ INSTRUCTIONS BEFORE COMPLETING FORM  |
|---|---|
| 1. REPORT NUMBER  AD 2. GOVY ACCESSION NO.  | BEFORE COMPLETING FORM  3. RECIPIENT'S CATALOG NUMBER   |
| 4. TITLE (and Substitle) APL TUTOR: An On-Line Instructional Facility   | 5. Type of REPORT & PERIOD COVERED Master's Thesis December 1983 6. PERFORMING ORG. REPORT NUMBER |
| 7. AUTHOR(a)  | S. CONTRACT OR GRANT NUMBER(a)  |
| Katherine A. Lanes  |   |
| Naval Postgraduate School Monterey, California 93943  | 10. PROGRAM ELEMENT, PROJECT, TASK<br>AREA & WORK UNIT NUMBERS                                    |
| 11. CONTROLLING OFFICE NAME AND ADDRESS  Naval Postgraduate School  Monterey, California 93943  | December 1983  13. NUMBER OF PAGES  |
| 14. MONITORING AGENCY NAME & ADDRESS(II different from Controlling Office)  | 200<br>15. SECURITY CLASS. (of this report)   |
|   | 15a. DECLASSIFICATION DOWNGRADING<br>SCHEDULE   |
| Approved for public release; distribution  17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different tree   |   |
| 18. SUPPLEMENTARY NOTES   |   |
| APL, programming language, tutorial, CAI,   |   |
| This thesis describes a set of APL programming Language ( student to learn A Programming Language ( student needs to know only how to log on enter a few simple commands to begin the The basic unit of the TUTOR workspace i which describes the use of one of seventy functions. This description is accessible | APL) by using it. The to the computer and course. s the text variable refive built-in APL         |

#### Block 20.

without going through an entire lesson. Other functions conduct interactive question-and-answer drill. A MENU function lists the units for student selection of a lesson or information on a symbol. The student can also go through a sequence of lessons in a computer-driven course.

These programs were written on and for the IBM 3033 installation at Naval Postgraduate School, using APL version 4.0 for VM/CMS with IBM 3278 terminals.



OTIC CORY INSPECTED Approved for public release; distribution unlimited.

APL TUTOR: An On-Line Instructional Facility

bу

Katherine S. Lanes
Lieutenant, United States Navy
B.A., New Mexico State University, 1974

Submitted in partial fulfillment of the requirements for the degree of

MASTER OF SCIENCE IN OPERATIONS RESEARCH

from the

NAVAL POSTGRADUATE SCHOOL December 1983

| Author:      | Kather         | ml     | S. L.    | mes       |          |
|--------------|----------------|--------|----------|-----------|----------|
| Approved by: | P_             | 0_     | Dem      | 1         |          |
|              | _              |        |          | Thesis    | Advisor  |
|              | $\sqrt{\cdot}$ | 150    | iry      |           |          |
|              | Dol.           | 7,     |          | Secon     | d Reader |
|              | Skal           | Van    | blen     | ~~        |          |
|              | Chairman, D    | eparti | ent of o | perations | Research |
|              | K. V.          | Hans   | LU       |           |          |
|              | Dean of        | Info   | HOLDER:  | ad Policy | Sciences |
|              |                |        |          | )         |          |

#### ABSTRACT

This thesis describes a set of APL programs which enable a student to learn A Programming Language (APL) by using it. The student needs to know only how to log on to the computer and enter a few simple commands to begin the course.

The basic unit of the TUTOR workspace is the text variable which describes the use of one of seventy-five built-in APL functions. This description is accessible by a HELP function without going through an entire lesson. Other functions conduct interactive question-and-answer drill. A MENU function lists the units for student selection of a lesson or information on a symbol. The student can also go through a sequence of lessons in a computer-driven course.

These programs were written on and for the IBM 3033 installation at Naval Postgraduate School, using APL version 4.0 for VM/CMS with IBM 3278 terminals.

#### TABLE OF CONTENTS

| I.   |         | B    | CK   | GI   | RO  | U          | I D   | •   | •          | •   | •   | •   | •  | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • | ٠ | 7          |
|------|---------|------|------|------|-----|------------|-------|-----|------------|-----|-----|-----|----|-----|----|-----------|---|---|----|-----|---|---|---|---|---|---|---|---|---|---|------------|
| ıı.  |         | σs   | IN   | G    | A   | ΡI         |       | r(  | JT         | 0   | R   | •   | •  | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • | • | 9          |
| III. | 1       | ΞX   | TE   | N    | DI  | NG         | ;     | A I | PL         | . : | ru  | TO  | R  |     | •  | •         | • | • | •  | •   | • | • | • | • | • | • | • | • | • | • | 12         |
| APPE | ZNDI    | X    | A:   |      | a   | SE         | e R   | • 5 | 3          | GI  | JI  | DE  | 1  | 0   | į  | l PI      | L | T | Uľ | O E | 2 | • | • | • | • | • | • | • | • | • | 14         |
| APPI | EN D I  | X    | B:   |      | P   | RC         | G     | R A | M          | M   | ER  | •s  | (  | 3 U | II | E         | • |   | •  | •   | • | • | • | • | • | • | • | • | • | • | 20         |
|      |         | A.   |      | F    | LO  | W          | C     | H   | A R        | T   | S   | •   |    | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • | • | 20         |
|      |         | в.   |      | F    | JN  | CI         | ľ     | 01  | S          |     | •   | •   | •  | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • | • | 42         |
|      |         | c.   |      | V    | AR  | I          | A B   | LI  | 2 S        | ;   | •   | •   |    | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • | • | 67         |
|      |         |      |      | 1.   | •   | (          | 31    | 01  | ba         | 1   | V   | ar  | ia | ı b | 16 | <b>\$</b> |   |   | •  |     | • | • | • | • | • | • | • | • |   | • | 67         |
|      |         |      |      | 2.   |     | 2          | [ e   | X 1 | t          | V   | aI  | ia  | b] | l e | s  | •         | • |   | •  |     | • | • | • | • | • | • | • | • | • | • | <b>7</b> 3 |
|      |         | D.   |      | M    | AK  | I          | N G   | : 1 | 90         | D:  | IF  | IC  | A' | r I | 0  | is        | • |   | •  | •   | • | • | • | • | • | • | • | • | • |   | 166        |
| APPI | e n d i | X    | c:   | :    | s   | A l        | M P   | L   | E          | B   | UN  | •   |    | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • |   | 168        |
| BIBI | LIO     | SR A | PB   | Y    |     | •          | •     | ,   | •          | •   | •   | •   | •  | •   | •  | •         | • |   | •  | •   | • | • | • | • | • | • | • | • | • |   | 199        |
| TNT  | P T N 1 |      | \T C | · m· | D T | <b>5</b> 1 | 1 179 | T/  | <b>7 M</b> | , , | T F | c m |    |     |    |           |   |   |    |     |   |   |   |   |   |   |   |   |   |   | 200        |

#### LIST OF FIGURES

| B <b>.</b> 1 | Interrelat | ior | ship  | of  | TUTOR   | F   | inc          | ti | OI. | s   | • | • | • | • | • | • | 22  |
|--------------|------------|-----|-------|-----|---------|-----|--------------|----|-----|-----|---|---|---|---|---|---|-----|
| B. 2         | Procedure  | of  | START | Fu  | nction  | Į.  | •            | •  | •   | •   | • | • | • | • | • | • | 23  |
| В. 3         | Procedure  | of  | MENU  | Fun | ction   | •   | •            | •  | •   | •   | • | • | • | • | • | • | 23  |
| B. 4         | Procedure  | of  | HELP  | Fun | ction   | •   | •            | •  | •   | •   | • | • | • | • | • | • | 24  |
| B.5          | Procedure  | of  | INFO  | Fur | ction   | •   | •            | •  | •   | •   | • | • | • |   |   |   | 25  |
| B.6          | Procedure  | of  | RUN F | unc | tion    | •   | •            | •  | •   | •   | • | • | • | • | • | • | 26  |
| B.7          | Procedure  | of  | TEACH | Fu  | nction  | L . | •            | •  | •   | •   | • | • | • | • | • | • | 27  |
| B. 8         | Procedure  | of  | LESSO | n F | unctio  | n   | •            | •  | •   | •   | • | • | • | • | • | • | 28  |
| B.9          | Procedure  | of  | SHOW  | Pur | ction-  | - 1 | ı            | •  | •   | •   | • | • | • | • | • | • | 29  |
| B.10         | Procedure  | of  | SHOW  | Fur | ction-  | - 2 | 2            | •  | •   | •   | • | • | • | • | • | • | 30  |
| B.11         | Procedure  | of  | SHOW  | Fui | ction-  | - 3 | 3            | •  | •   | •   | • | • | • |   | • | • | 31  |
| B.12         | Procedure  | of  | ASK F | unc | tion    | •   | •            | •  | •   | •   | • | • | • | • | • | • | 32  |
| B.13 .       | Procedure  | of  | SUMAS | KE  | unctio  | n   | •            | •  | •   | •   | • | • | • | • | • | • | 3.3 |
| B. 14        | Procedure  | of  | SCORE | F   | nction  | l   | •            | •  | •   | •   | • | • | • | • | • | • | 34  |
| B.15         | Procedure  | of  | RUNDR | ILI | . Funct | :i: | n            | •  | •   | •   | • | • | • | • | • | • | 35  |
| B.16         | Procedure  | of  | DRILL | Pu  | nction  | 1   | •            | •  | •   | •   | • | • | • | • | • | • | 36  |
| B.17         | Procedure  | of  | PULL  | Fur | ction   | •   | •            | •  | •   | •   | • | • | • | • | • | • | 37  |
| B.18         | Procedure  | of  | TRY F | unc | tion    | . 1 | •            | •  | •   | •   | • | • | • | • | • | • | 38  |
| B.19         | Procedure  | of  | TRY F | unc | tion    | · 2 | •            | •  | •   | •   | • | • | • | • | • | • | 39  |
| B.20         | Procedure  | of  | TEST  | Pur | ction   | •   | •            | •  | •   | •   | • | • | • | • | • | • | 40  |
| B.21         | Procedure  | of  | SQUEE | ZE, | NEXTI   | ES  | <b>5</b> \$0 | N, | . а | n ć | ì |   |   |   |   |   |     |
|              | ORDERMAT F | 770 |       |     |         |     |              |    |     |     |   |   |   |   |   |   | 41  |

#### I. BACKGROUND

A Programming Language (APL) is an interactive, interpretive computer language designed by Kenneth E. Iverson at Harvard in 1962. Its advantages include the ease of manipulation of multi-dimensional arrays of numbers, the lack of rigorous input/output formatting, and the use of unique symbols to represent a wide variety of built-in functions. Unlike other high-level languages, there is no requirement to write and compile a strictly formatted program before execution. APL may be used in "desk calculator" mode, where a single line of input is accepted and evaluated, returning an immediate response. While it may take quite some time for the user to master APL fully, the beginner can quickly jump in and start experimenting.

The APL TUTOR was designed to enable the beginning APL student to gain some familiarity with the basic concepts of the language without going through a formal course. It consists of a set of APL programs which enable the student to enter simple commands and receive information, questions, and drill about the symbols and functions used in APL. Since at present no information on writing functions is included, it may be used as a supplement to the normal mode of teaching at NPS.

Currently the APL student's resources at NPS consist of the instructor, other students, and texts such as those listed in the bibliography. There also exists a copyrighted IBN drill function, TEACH, found in the APLCOURS workspace in the public library of most APL installations. (At NPS, it can be accessed by entering ) LOAD 1 APLCOURS while in APL mode.) This function, and a sub-function, EASYDRILL, provide simple drill questions for calculator functions

selected by the student. This workspace does not, however, provide any information concerning the correct use or syntax of any functions.

The specific audience targeted is the first to third quarter NPS students in the Operations Analysis curriculum, who are currently taught APL in one-hour weekly labs as part of three probability and statistics courses. Many, if not most, of these students arrive at NPS from six weeks to six months before their first quarter. It would be to their advantage to get a 'head start' on learning APL, but there is no separate course in this language as there is in FORTRAN or PASCAL, for example.

A basic requirement for the TUTOR, then, is that it be comprehensible to someone who has never seen APL before. In fact, the "desk calculator" functions should be understandable to someone who has never even used a computer before. This means that some of the beginning lessons may seem too simplistic to the student who has some programming experience. However, the more advanced student can easily skim through this primary material and progress to the more sophisticated concepts. Intermediate mathematics including concepts of linear algebra is the only background information that is assumed.

#### II. USING APL TUTOR

The APL TUTOR workspace should be available in one of the public libraries at NPS. Instructions for loading and copying it are on the first page of Appendix A. If it is not available in the public libraries, it can be obtained from Professor R. R. Read upon request.

The APL TUTOR workspace contains sixteen functions which administer the course. Their interrelationship is shown in Figure B.1. In this diagram, the ovals indicate functions which are called by the student, while rectangles indicate functions which are called internally. The procedure of each function is outlined in Figures B.4 through B.21. Further information can be found in the comment lines of each program in Appendix B, part B.

The actual text of the course is contained in APL variables which are displayed by the functions SHOW and RUN. The text of each variable can be found in Appendix B, part C.2. Also in Appendix B (part C.1) are several global variables which are used in various programs. Most important of these is MAT, which provides information on each text variable, such as the symbol it pertains to, the function type (Monadic/Dyadic/Neither), the type of arguments it takes (Numeric, character(K), Either, Boolean), the rank of the arguments permitted (Scalar, Vector, matrix(X), Any), and a sequential lesson number. The other major global variable is CUES, which consists of a number of questions that can be called upon by the ASK function.

Before commencing the APL TUTOR course, the student needs to have, as a minimum, the instructions given on the first page of Appendix A. The other information the student will need is displayed by the TUTOR, and is also included in

Appendix A, which should be given to all students who will be using TUTOR. The variable HOW is displayed each and every time the workspace TUTOR is loaded by the student, and can also be called up at any time by entering HOW. The other variables in Appendix A are displayed by the START function. Most may be called up by the student at any time, as noted.

Figure B.1 shows the variety of ways the student can access and use the information in TUTOR. The beginner enters START to get the basic background information needed to complete the course. START instructs the student to enter LESSON 100 to begin the course. After completing this lesson, the student merely has to enter LESSON NEXT to receive the instructional units in the order indicated in the variable MAT.

The student who is enrolled in a course using APL may also follow the instructor's guidance concerning lessons to take. The student enters LESSON NNN, where NNN is the lesson number assigned. A more advanced student can explore or review earlier lessons by entering TEACH and then the symbol that he/she is interested in.

The more advanced student may also be interested in the HELP function which displays information without asking questions or providing a drill. The student can enter HELP, followed by the appropriate symbol, or INFO NNN, where NNN is the same as the pertinent lesson number. These lesson numbers can be found by entering MENU and browsing the list displayed. MENU also repeats the instructions for using LESSON and INFO.

Effort has been made to ensure that the programs will not terminate abnormally in response to a student input error. Every input is checked for validity before it is processed. For example, see the function DRILL, page 59, at lines 8 to 17. However, because it is not possible to check

for every possible input or combination of inputs, there may still be some way to cause an error. Instructions to the student in case of an error are included in the BASICS displayed by the START function. The student should have a hard copy of these instructions, as well.

Any input by the student at a time when no input is called for will cause an abnormal termination. This is inherent in the APL interpreter and cannot be avoided by the programmer. However, all the student needs to do in this case is restart by entering one of the elementary commands (HELP, TEACH, LESSON, etc.)

A sample run is included at Appendix C.

#### III. EXTENDING APL TUTOR

There are many ways in which the APL TUTOR can be expanded to improve its usefulness. Lessons could be included on the many system commands and variables which are used in APL. Auxiliary lessons or groups of functions, e.g. logical functions, and their basic concepts could provide useful additional information. Lessons could be added to describe programming techniques, and amplifying lessons on applications could be provided. Probably any of the lessons could benefit from additional questions to be included in the ASK function. Also, the ASK function itself could be modified to permit more complex questions and answers.

Another type of improvement from the pedagogical point of view would be the inclusion of facilities for measuring and recording students' progress. The student could be tested after every lesson or group of lessons and the scores recorded for the instructors review. Or, the course could be designed to automatically review the student's weak areas and retest before going on. In any case, it might be beneficial to include lessons which review concepts covered by the course so far.

A test and evaluation of the TUTOR would be extremely beneficial in comparing it to the current teaching methods. Students could be tested for their knowledge of APL and those who had used the TUTOR compared to those who had not. Furthermore, different versions of the TUTOR could be tested against each other. Several different texts could be used, or versions with and without the drill functions.

This could lead to a still more sophisticated modification of the course, in combination with programmed student testing. After an initial unit, the testing could be

designed to reveal what type of instruction, e.g. drill or no drill, works best for that individual student. Or, the student could simply be asked his or her preferences in terms of teaching techniques. Then the course would automatically tailor later lessons to the individual.

modify the current programs. These programs have been heavily documented by flow charts and comment lines (Appendix B) in order to make the task of modification easier. Also, specific instructions for certain types of modifications are included in the variable HOWMODS, Appendix B, part D. Any advanced student can personalize a copy of TUTOR with the help of these tips. For more substantial modifications such as those suggested above, the point of contact for the public version of TUTOR at NPS is Professor R. R. Read.

#### APPENDIX A USER'S GUIDE TO APL TUTOR

IF YOU HAVE NEVER EVER USED THE COMPUTER BEFORE, START HERE:

- 2.
- Go to the Registration and Accounting Office inside Ingersoll rm. 141. Ask for a user number. You will need to tell them the password you want to use. While you are there, pick up a copy of NPS Technical Note VM-01, "User's Guide to VM/CMS at NPS." Follow the instructions in VM-01 for logging on and formatting your disk. If your keyboard has little red symbols on it, you may continue with step 6 below. Otherwise, log off (see VM-01) and continue with step 4 when you are ready.

IF YOU HAVE FORMATTED YOUR DISK, START HERE:

- Find a free terminal (in Ingersoll room 141 or room 369) that has red symbols on the keyboard.
  Log on and enter your password.
  When you see a line beginning CMS..., press the ENTER 4.
- press the ENTER
- 7. When you see a line beginning R: ..., enter the letters
- 7. When you see a line beginning R: ..., enter the letters API.

  8. You should see several lines appear ending with the line CLEAR WS. If you don't, stop here and get help!

  9. Now look at the bottom center of your screen, below the line. If you don't, hold down the ALT key (next to the ENTER key) and press the large key at the top riedrs on the front. The letters API should now appear at the bottom of your screen. This tells the terminal to use the red symbols on the front of the keys, you must hold down the ALT key instead of the SHIFT key.

  10. If THIS IS THE VERY FIRST TIME YOU ARE USING API TUTOR, ENTER ) LOAD 5 TUTOR. (Remember to use the red parenthesis, third row, far right, not the black parenthesis in the top row.) OR POLLOW THE DIRECTIONS GIVEN BY YOUR followed the directions in steps 12 and 13 below, just enter ) LOAD TUTOR.

  11. Now just follow the directions which appear on the screen. If no directions appear, and all you see is a line which says SAVED... and possibly a line which says WSSIZE... enter HOW to see the directions. To be sure that the directions appear, and all your session.

  12. If this is the first time you have used TUTOR, enter ) WSID TUTOR.

  13. When you are ready to quit for the day, enter ) SAVE.

  14. When you see the time, date, and TUTOR, enter ) OFF.

- When you are ready to quit for the day, enter )SAVE. When you see the time, date, and TUTOR, enter )OFF. This will log you off the computer completely. (For more advanced students: )OFF HOLD will return you to 14.

YOU MAY USE THE APL TUTOR IN THREE WAYS:

- (1) ENTER: HELP

  TO SELECT THE SYMBOLS THAT YOU WANT INFORMATION ABOUT.
- (2) ENTER: TEACH

  TO SELECT THE SYMBOLS THAT YOU WANT INFORMATION AND DRILL ON.
- (3) ENTER: MENU

  TO SEE A LIST OF SYMBOLS AND TOPICS.

IF YOU HAVE NEVER USED THE APL TUTOR BEFORE, ENTER: START

TO SEE THESE INSTRUCTIONS AGAIN AT ANY TIME, ENTER! HOW

INTRO

WELCOME TO THE APL TUTOR,

THE PURPOSE OF THIS WORKSPACE IS TO INTRODUCE YOU TO

'A PROGRAMMING LANGUAGE' BY DESCRIBING THE FUNCTIONS OF THE

MANY SPECIAL APL SYMBOLS, AND BY OUTLINING THE PROCEDURES FOR

DESIGNING YOUR OWN FUNCTIONS.

#### BACKGROUND

- THE APL TUTOR ASSUMES YOU HAVE HAD LINEAR ALGEBRA AND TRIGINOMETRY.

  CALCULUS IS NOT NECESSARY.
- IF YOU HAVE NEVER HAD ANY COMPUTER PROGRAMMING BEFORE, DON'T WORRY,
  YOU CAN START USING APL RIGHT AWAY, AS A SUPER-SOPHISTICATED
  CALCULATOR WITH MANY BUILT-IN FUNCTIONS.
- IF YOU HAVE STUDIED OTHER COMPUTER PROGRAMMING LANGUAGES, RELAX,

  APL IS NOT LIKE ANY OF THE OTHER MAJOR HIGH-LEVEL LANGUAGES,

  YOU CAN FORGET ABOUT DATA TYPES, INPUT/OUTPUT FORMATTING, AND

  MANY OF THE OTHER TEDIOUS DETAILS OF FORTRAN, PASCAL, ETC.

  AFTER YOU ARE SUFFICIENTLY FAMILIAR WITH THE CALCULATOR MODE

  OF APL, YOU CAN LEARN TO DEFINE YOUR OWN FUNCTIONS WITH EASE.

#### BASICS

HERE IS SOME BASIC INFORMATION YOU WILL NEED TO KNOW IN ORDER TO UNDERSTAND THE APL TUTOR LESSONS,

#### MONADIC AND DYADIC FUNCTIONS

- YOU ARE ALREADY FAMILIAR WITH SYMBOLS WHICH REPRESENT ARITHMETIC
  FUNCTIONS, SUCH AS + OR ÷. APL USES THESE SYMBOLS AND MANY OTHERS
  TO REPRESENT A VARIETY OF FUNCTIONS.
- MANY FUNCTIONS, SUCH AS +, REQUIRE TWO ARGUMENTS, THAT IS, TWO INPUT HUMBERS. IN APL, THESE ARE CALLED DYADIC FUNCTIONS, AND THE SYMBOL IS PLACED BETWEEN THE ARGUMENTS; FOR EXAMPLE, 3+4.
- OTHER FUNCTIONS, SUCH AS LN (NATURAL LOG), REQUIRE ONLY ONE ARGUMENT.

  THESE MONADIC FUNCTION SYMBOLS ARE PLACED TO THE LEFT OF THE DATA

  WHICH THEY ARE TO OPERATE ON. FOR EXAMPLE, LN 3 IN APL IS #3.

#### DATA TYPES

APL DISTINGUISHES ONLY TWO TYPES OF DATA: NUMERIC AND CHARACTER,
VERY SIMPLY, CHARACTER DATA ARE ENCLOSED IN GUOTES (') WHEN ENTERED.
'2' IS CHARACTER DATA; 2 IS NUMERIC DATA, SOME FUNCTIONS
WILL OPERATE ON BOTH TYPES OF DATA, SOME ONLY ON NUMERIC.

#### ARRAYS

THE GREATEST STRENGTH OF APL LIES IN ITS ABILITY TO TAKE AN ENTIRE ARRAY OF NUMBERS AS A SINGLE ARGUMENT. THUS TWO MATRIXES CAN BE ADDED BY ENTERING SIMPLY A+B, WITH NO SUBSCRIPTS, LOOPS, ETC.

THIS MAKES IT IMPORTANT TO KNOW THE RANK (THE NUMBER OF DIMENSIONS)

OF DATA IN USE. A SINGLE NUMBER IS NORMALLY A SCALAR (RANK O).

A SERIES OF NUMBERS IS A VECTOR, A ONE-DIMENSIONAL ARRAY (RANK 1).

NUMBERS CAN ALSO BE ARRANGED IN ROWS AND COLUMNS, TO MAKE A MATRIX

(RANK 2). MATRIXES CAN BE 'STACKED' TO MAKE UP THE PAGES OF A

THREE-DIMENSIONAL ARRAY, OFTEN CALLED A BOOK (RANK 3). IN FACT,

THERE IS NO LIMIT TO THE NUMBER OF DIMENSIONS IN AN APL ARRAY.

THE LENGTH OF THE DIMENSIONS IS ALSO EFFECTIVELY UNLIMITED. LENGTH

REFERS TO THE NUMBER OF ELEMENTS IN A DIMENSION, FOR EXAMPLE, THE NUMBER OF ROWS. LENGTH MAY EVEN BE ().

IN THIS TUTORIAL, A SCALAR MAY BE REFERRED TO AS S, L, OR R.

A VECTOR MAY BE CALLED V, V1, OR V2, WHILE A MATRIX IS M, M1, OR M2.

AN ARRAY, WHICH MAY BE A VECTOR, A MATRIX, OR AN ARRAY OF ANY HIGHER DIMENSION, WILL BE LABELLED A, A1, OR A2.

#### EXAMPLES

when examples are given in the text of a function description, the symbol => is used between the example input and the example output.

FOR EXAMPLE: 2+5 => 7

THIS SYMBOL CAN BE READ AS 'PRODUCES' OR 'RETURNS'.

#### ERRORS

- YOU SHOULD NOT RECEIVE ANY ERROR MESSAGES WHILE USING APL TUTOR.

  HOWEVER, YOU MAY SEE A PHRASE LIKE 'VALUE ERROR' (WITHOUT QUOTE MARKS) WHEN YOU ARE EXPECTING A NORMAL RESPONSE.
- OR IF YOU ACCIDENTALLY HIT THE ENTER KEY WHEN THE COMPUTER IS NOT EXPECTING AN INPUT, THE FUNCTION MAY END ABRUPTLY, LIKE THIS: MENU [6]
- IF EITHER OF THESE THINGS HAPPEN, BE SURE TO ENTER:  $\rightarrow$  (UPSHIFT  $\leftarrow$ )
  THEN RESTART WITH ANY COMMAND.

#### HALTING A LESSON

YOU MAY STOP ANY LESSON AT ANY POINT WHERE A QUESTION IS ASKED BY ENTERING: STOP

TO SEE THIS INFORMATION AGAIN AT ANY TIME, ENTER! BASICS

#### HOWTEACH

YOU MAY START A LESSON IN THREE WAYS:

- (1) ENTER: LESSON NEXTLESSON

  TO START THE LESSON FOLLWING THE LAST ONE YOU COMPLETED.
- (2) ENTER: LESSON NHN (WHERE HHH IS A 3-DIGIT NUMBER)

  TO START LESSON NUMBER NHH,

  TO SEE A LIST OF LESSON NUMBERS, ENTER: MENU
- (3) ENTER: TEACH

  TO SELECT THE SYMBOL THAT YOU WANT A LESSON ON.

TO SEE THIS INFORMATION AGAIN AT ANY TIME, ENTER: HOWTEACH

### APPENDIX B PROGRAMMER'S GUIDE

#### A. FLOW CHARTS

Figure B.1 shows the relationship of the various functions within the TUTOR workspace. The first function called by the new student should be START. After that, the student will usually commence a session by calling MENU, TEACH, HELP, LESSON, or INFO. These functions in turn call the other functions of TUTOR as indicated by the arrows. The procedure of these functions is outlined in figures 5.2 through B.21.

In APL, there is no difference in the programming of main routines, subroutines, and functions: all are referred to as functions. However, when one function calls another function, the calling function is suspended until the called function is completed. Then the calling function resumes operation, possibly using the result of the called function. Therefore, "return to the calling function, if any" is implied at the end of every program but is not explicit. END, implying return, is shown in the diagrams only in those functions which are normally called by another function.

It should be noted that "room for expansion" has been provided in the SHOW, RUNDRILL, DRILL, and TEST functions. RUNDRILL and DRILL have the capability to display drill questions with matrix arguments. This capacity is not currently being used because the answer must be input in vector form. It was felt that this might confuse the student. However, further development and experimentation might find uses for this type of question, so the matrix form has been left available. TEST and SHOW have calling

lines for the matrix form commented out. There are also comment lines in SHOW to indicate where matrix and higher-level arrays questions would go if they are added in the future. See the section on making modifications for more information.

The four functions at the bottom of figure B.1 are not part of the TUTOR function hierarchy. NEXTLESSON is used to provide a lesson number when the student calls for LESSON NEXTLESSON. ORDERMAT is provided for the benefit of the programmer to rearrange the sequence of lessons in the course. TEST is also provided for the programmer (or student) who wishes to run only the drill section of a lesson. SQUEEZE is a utility called by several functions to delete blanks in a string of characters.

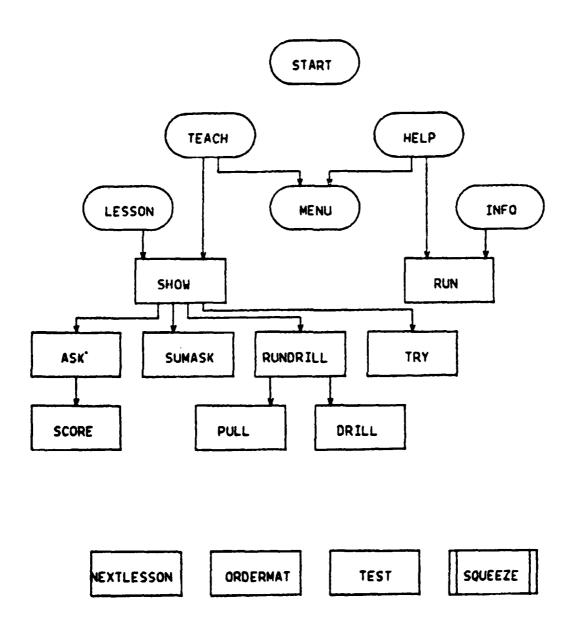


Figure B. 1 Interrelationship of TUTOR Functions.




Figure B.2 Procedure of START Function.




Figure B.3 Procedure of MENU Function.


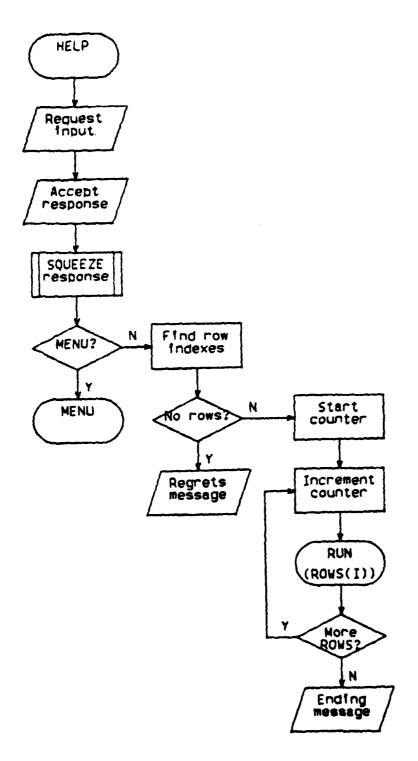


Figure 8.4 Procedure of HELP Function.

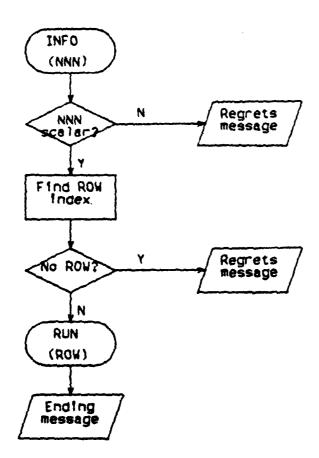

Pigure B.5 Procedure of IMFO Function.


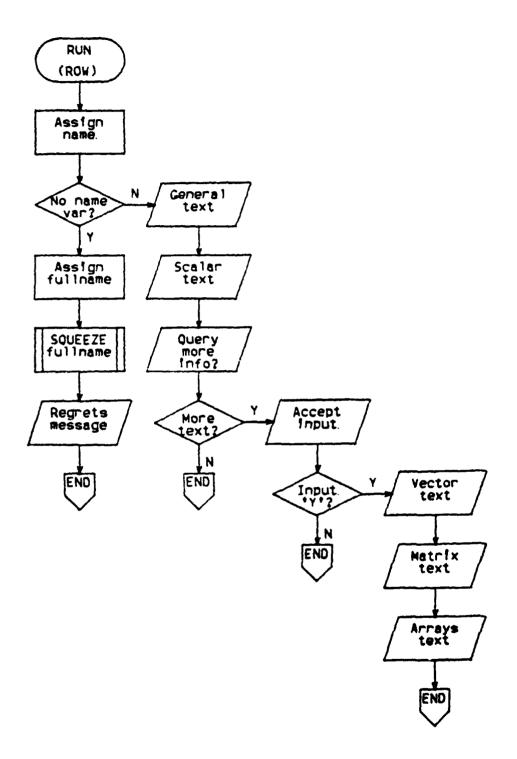


Figure 8.6 Procedure of RUN Function.

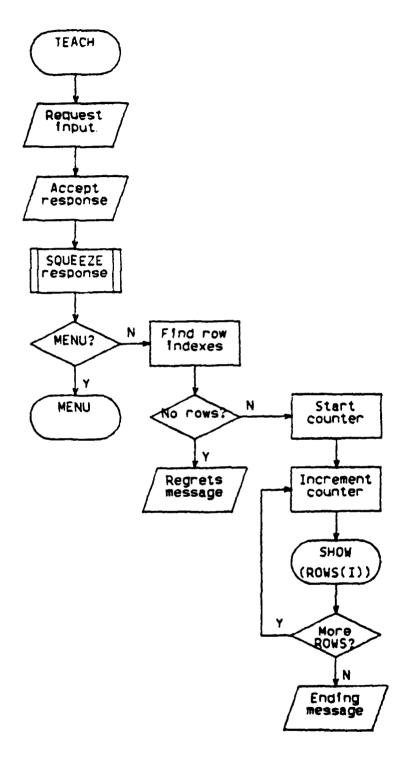

Pigure B.7 Procedure of FEACH Function.

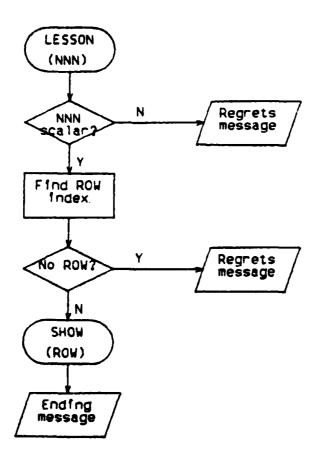


Figure B.8 Procedure of LESSON Function.

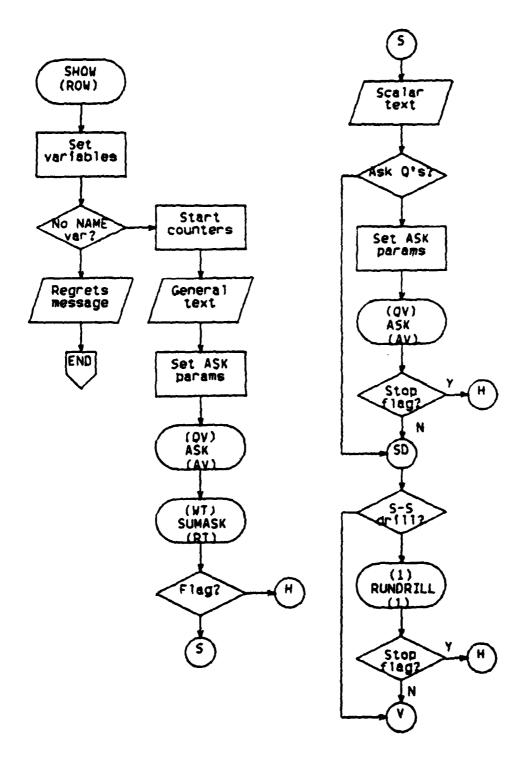


Figure 8.9 Procedure of SHOW Function--1.

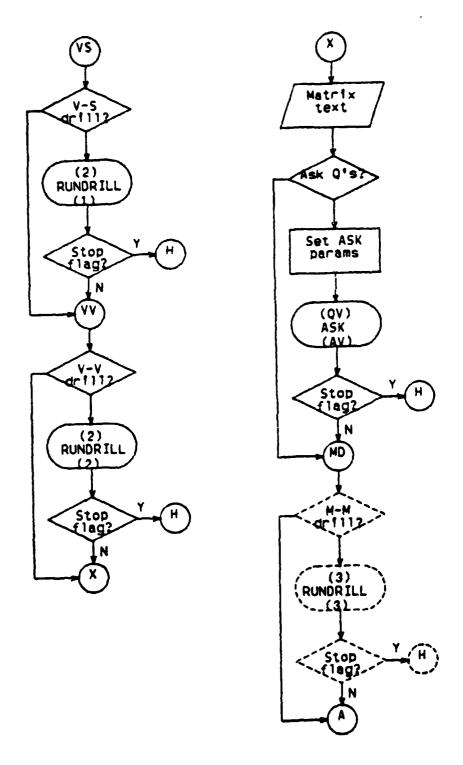


Figure B.10 Procedure of SHOW Function--2.

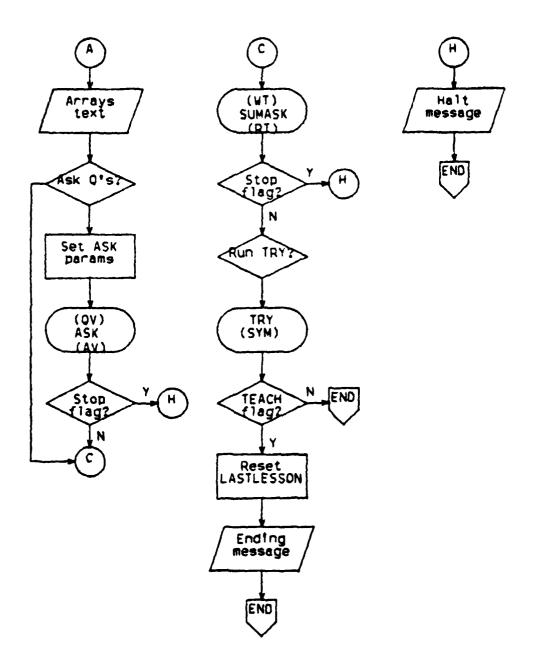


Figure B.11 Procedure of SHOW Function--3.

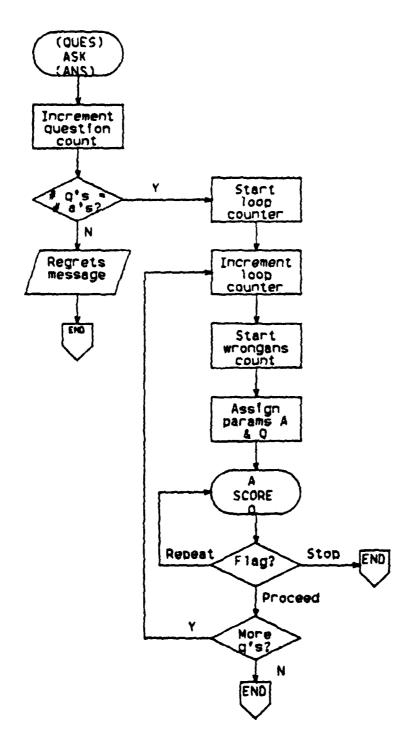


Figure B. 12 Procedure of ASK Function.

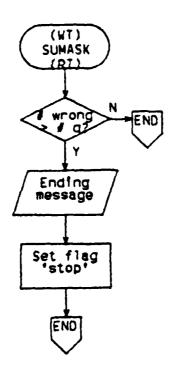


Figure B.13 Procedure of SUHASK Function.

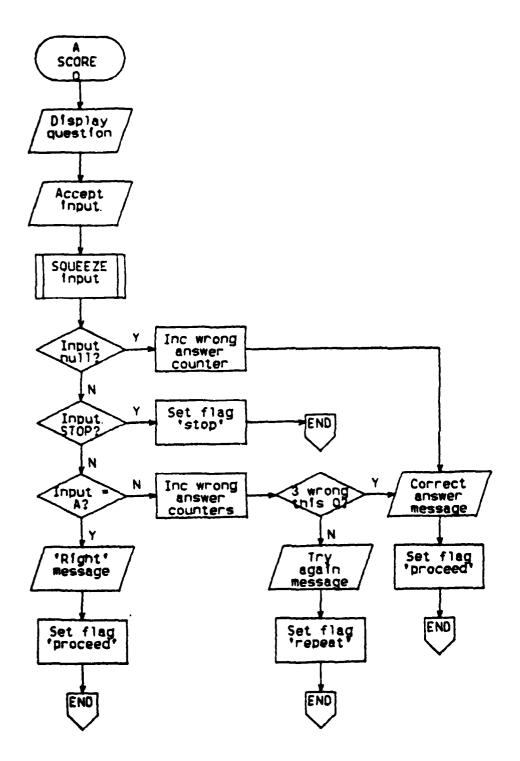


Figure B. 14 Procedure of SCORE Function.


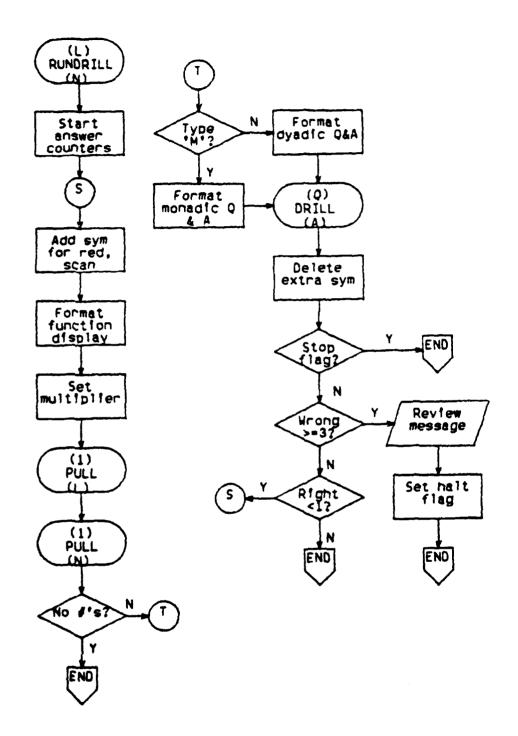


Figure B. 15 Procedure of RUNDRILL Function.

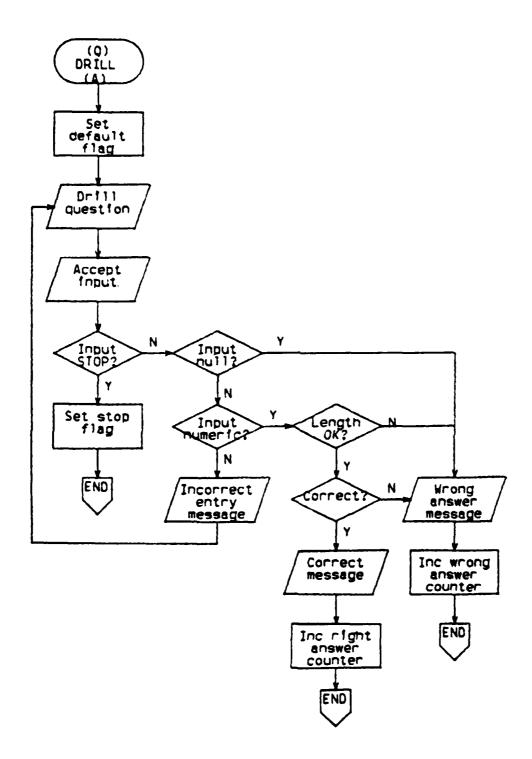

Pigure B. 16 Procedure of DRILL Function.

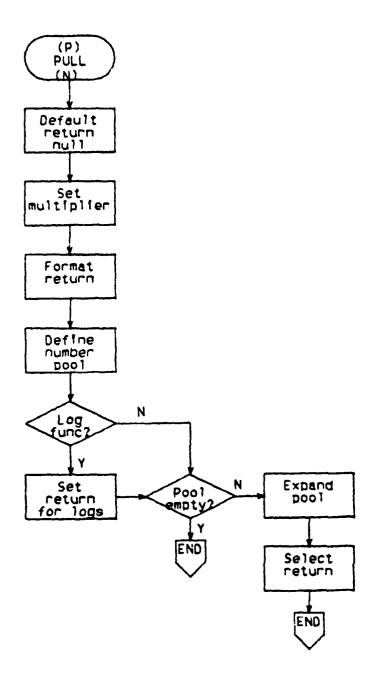


Figure B. 17 Procedure of PULL Function.

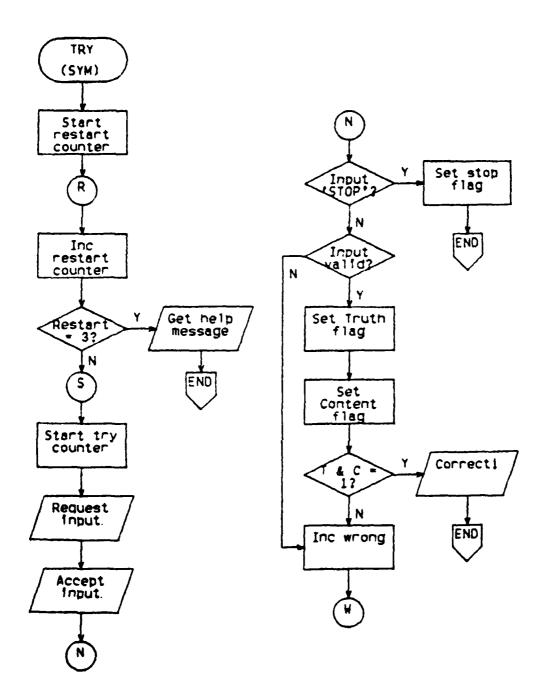


Figure B.18 Procedure of TRY Function--1.

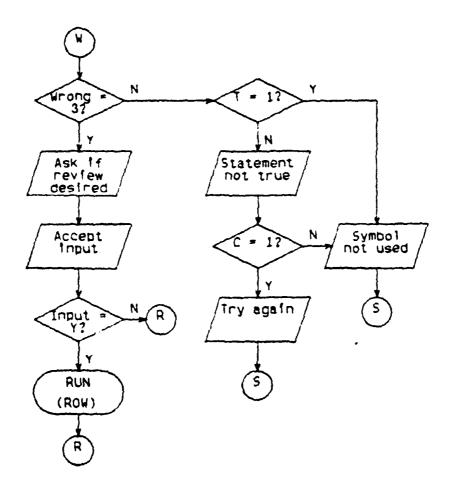


Figure B.19 Procedure of TRY Function--2.

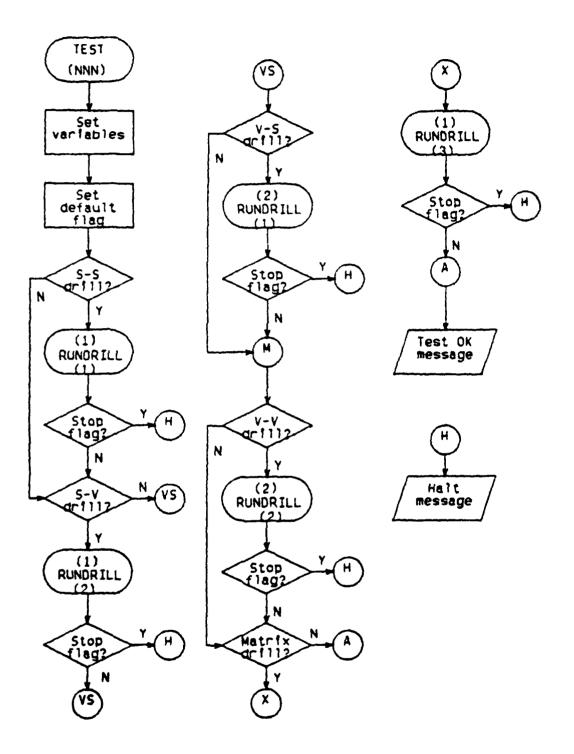


Figure B. 20 Procedure of TEST Function.

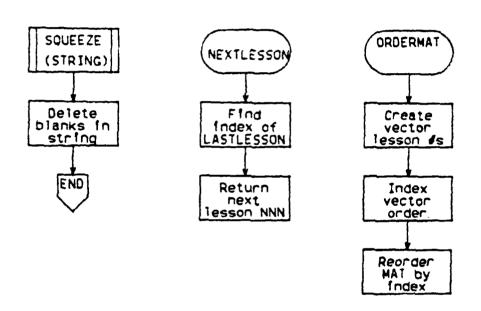


Figure B.21 Procedure of SQUEEZE, NEXTLESSON, and ORDERMAT Fis.

## B. FUNCTIONS

The following section contains the APL functions which operate the TUTOR course. The comment lines, which begin with a symbol, indicate the procedure in general, but do not describe the specific programming techniques used.

7 START

- [1] A ENSURES 'HOW' APPEARS WHEN WORKSPACE IS LOADED
- [2] Drx+.Hom.
- [3] A DISPLAYS INFORMATION FOR FIRST-TIME USER
- [4] DEINTRO
- [5] DEBACKGROUND
- [6] U+BASICS
- [7] DEHOWTEACH
- [8] Orce, 'TO START YOUR FIRST LESSON IN APL, ENTER: LESSON 101'

⊽

### P MENU; ZZZ

- [1] A REGUIRES GLOBAL VARIABLE MAT
- [2] OF INFORMATION IS AVAILABLE ON THE FOLLOWING SYMBOLS/TOPICS;
- [3] A FORMAT AND DISPLAY MEHU
- [4] ZZZ+(5p1),0,(17p1),0
- [5] (([((FMAT)[1])+3),72);ZZZ\MAT[;LESCOL,SYMCOL,FNAMECOL]
- [6] [6] TO SEE MENU AGAIN, ENTER: MENU', CR, 'FOR INFORMAT ION ABOUT FUNCTION, ENTER: INFO NHN (WHERE HAN IS MENU NUMBER)
  ', CR, 'TO GO THROUGH TUTORIAL LESSON, ENTER: LESSON HAN'

- O HELP; SYMBOL; ROWS; NNN; R
- [1] A CALLS QUEUE, MEHU, SQUEEZE
- [2] OF ENTER THE SYMBOL(S) YOU WOULD LIKE INFORMATION ABOUT.
- [3] O+' OR ... FOR MENU SELECTION, ENTER: MENU!
- [4] # DELETE BLANKS IN RESPONSE
- [5] SYMBOL+SQUEEZE SYMBOL+Q
- [6] A IF RESPONSE IS 'MENU', GO TO 'OTHER'; ELSE GO ON
- [7] +OTHERX1(4=+/+/SYMBOL . = 'MENU')
- [8] A FIND INDEXES OF ROWS THAT CONTAIN THE RESPONSE IN SYMBOL COLUMN
- [9] ROWS+(MAT[;SYMCOL];SYMBOL)/((FMAT)[1]
- [10] A IF NO ROWS CONTAIN RESPONSE, GO TO 'OOPSJ'; ELSE GO ON
- [11] +00P53x10=PROWS
- [12] A START LOOP COUNTER AND SET LESSON NR TO O
- [13] HHHEREO
- [14] A INCREMENT COUNTER
- [15] NEWROW: R+R+1
- [16] D+SE
- [17] A CALL RUN TO DISPLAY HELP FUNCTION FOR ROW CORRESPONDING TO COUNTE
- [18] RUH ROWS[R]
- [19] a IF MORE ROWS REMAIN, RETURN TO NEWROW; ELSE GO ON
- [20] HEWROWX REPROMS
- [21] A PRINT FUNCTION ENDING MSG AND EXIT
- [22] OF'FOR MORE HELP, ENTER! HELP'
- [23] →0
- [24] # SYMBOL NOT FOUND; PRINT ERROR MSG AND EXIT
- [25] OOPS3: []+'SORRY, INFORMATION ABOUT THIS SYMBOL IS NOT AVAILABLE AT T
  HIS TIME, ', CR, 'FOR HELP WITH ANOTHER SYMBOL, ENTER: HELP.'
- [26] →0
- [27] & RESPONSE IS 'MEHU'; EXECUTE RESPONSE AND EXIT
- [28] OTHER: SYMBOL

- V INFO NHN; ROW
- [1] A CALLS RUN; REQUIRES GLOBAL VARIABLE MAT
- [2] A IF NHN IS NOT A SCALAR, GO TO 'OOPS1; ELSE GO ON
- [3] +00P\$1x((FFHHH))0
- [4] A FIND INDEXES OF ROW
- [5] ROW+((1, MAT[; LESCOL])=NNN)/((FMAT)[1]
- [6] A IF NO ROWS CONTAIN RESPONSE, GO TO 'OOPS3'; ELSE GO ON
- [7] +00P53x10=PRCW
- [8] A RUN HELP FUNCTION
- [9] RUN ROW
- [10] a DISPLAY ENDING MESSAGE
- [11] O+CR, FOR MORE INFORMATION, ENTER: INFO MMM'
- £123 →0
- [13] A VECTOR ARGUMENT; PRINT ERROR MSG AND EXIT
- [14] DOPS1: 04' INFO MUST BE FOLLOWED BY A SINGLE PARAMETER, ', CR, 'TO RESTA RT, ENTER: INFO NAM (WHERE ANN IS A THREE-DIGIT NUMBER)'
- [15] →0
- [16] # INFO HOT FOUND; PRINT ERROR MSG AND EXIT
- [17] OOFS3: []+'SDRRY, INFORMATION ABOUT THIS SYMBOL IS NOT AVAILABLE AT THIS TIME.', CR, 'FOR HELP WITH ANOTHER SYMBOL, ENTER: HELP.'

- V RUH ROW; HAME; RANK; FHAME; U
- [1] A CALLED BY HELP, INFO, TRY; CALLS SQUEEZE
- [2] A REQUIRES GLOBAL VARIABLE MAT
- [3] RASSIGN THE NAME OF THE HELP VARIABLE TO THE VARIABLE 'NAME'
- [4] HAME+, MAT[ROW; HAMECOL]
- [5] A GO TO HA IF THE HELP VARIABLE 'MAME' DOES NOT EXIST; ELSE GO ON
- [6] +HAX10=[HC HAME
- [7] a DISPLAY THE GENERAL DESCRIPTION PORTION OF THE HELP VARIABLE
- [8]  $\Box \in (0, 1) \downarrow ((\pm \text{HAME})[\frac{1}{2}] = (\frac{1}{2}) \neq \pm \text{HAME}$
- [9] A DISPLAY SCALAR PORTION OF HELP VARIABLE
- [10] [+(0 1)+((\*NAME)[;1]='.')/\*\*NAME
- [11] A IF HO MORE INFO, EXIT; ELSE GO ON
- [12] +0x1~1e(+HAME)[;1]e'vnx'
- [13] A ASK IF MORE DETAILED INFO DESIRED
- [14] []+CR, 'MORE?'
- [15] A IF RESPONSE IS MULL, EXIT; ELSE GO ON
- [16] +0x10=pu+0
- [17] +0x1~'Y'=(,U)[1]
- [18] a DISPLAY VECTOR PORTION OF HELP VARIABLE
- [20] a DISPLAY MATRIX FORTION OF HELP VARIABLE
- [22] a DISPLAY ALL ARRAYS FORTION OF HELP VARIABLE
- [23]  $\Box + (0 \ 1) + ((\pm NAME)[;1] = (\pm ') / \pm NAME$
- [24] →0
- [25] A ASSIGN FULL NAME OF STMBOL TO VARIABLE 'FNAME'; PRINT ERROR MSG
- [26] MA: FHAME+SQUEEZE, MAT[ROW; FNAMECOL]
- [27] []+CR, 'SORRY, INFORMATION ABOUT ', FNAME, ' IS NOT AVAILABLE AT THIS TIME.'

- ♥ TEACH; SYMBOL; ROWS; HNH; R
- [1] A CALLS SCHEDULE, MENU, SQUEEZE
- [2] Ge'ENTER THE SYMBOL(S) YOU WOULD LIKE INFORMATION ABOUT.
- [3] OF' OR FOR MENU SELECTION, ENTER: MENU!
- [4] A DELETE BLANKS IN RESPONSE
- [5] SYMBOL+SQUEEZE SYMBOL+D
- [6] A IF RESPONSE IS 'MENU', GO TO 'OTHER'; ELSE GO ON
- [7] +OTHERX (4=+/+/STMBOL . = 'MEHU')
- [8] A FIND INDEXES OF ROWS THAT CONTAIN THE RESPONSE IN SYMBOL COLUMN
- [9] ROWS+(MATE; SYMCOL] & SYMBOL) /1 (FMAT)[1]
- [10] A IF NO ROWS CONTAIN RESPONSE, GO TO 'OOPS3'; ELSE GO ON
- [11] +00P53x10=PROW5
- [12] A INITIALIZE LOOP COUNTER AND SET LESSON MR TO O
- [13] NHHEREO
- [14] A INCREMENT COUNTER
- [15] NEWROW: RER+1
- 22+U [61]
- [17] A CALL SHOW TO DISPLAY TEACH FUNCTION FOR ROW INDEXED BY COUNTER
- [18] SHOW ROWS[R]
- [19] A IF ROWS REMAIN, RETURN TO NEWROW; ELSE GO ON
- [20] +HEWROWX \R(PROWS
- [21] A DISPLAY END OF SCHEDULE MSG AND EXIT
- [22] ### THIS IS THE END OF SCHEDULED LESSONS, ', CR, 'TO SELECT MORE LE SSONS, ENTER: TEACH'
- [23] →0
- [24] A SYMBOL NOT FOUND; PRINT ERROR MSG AND EXIT
- [25] OOPS3: 0+'SORRY, INFORMATION ABOUT THIS SYMBOL IS NOT AVAILABLE 4T T HIS TIME.', CR, 'FOR LESSONS ON ANOTHER SYMBOL, ENTER: TEACH'
- [26] +0
- [27] A RESPONSE IS 'MENU'; EXECUTE RESPONSE AND EXIT
- [28] OTHER: SYMBOL

#### ♥ LESSON HNH; POW

- [1] a CALLS SHOW
- [2] A IF NHH IS NOT A SCALAR, GO TO 'OOPS1; ELSE GO ON
- [3] +00PS1x1(PFHHH))0
- [4] A SELECT ROW FOR LESSON HUMBER HIM
- [5] ROW+((1, MAT[; LESCOL]) = HMM)/((FMAT)[1]
- [6] A IF NO ROWS CONTAIN RESPONSE, SO TO 'COPSI'; ELSE GO ON
- [7] +00P\$3x10=FROW
- [8] A CALL SHOW TO DISPLAY TEACH FUNCTION FOR ROWS SELECTED
- [9] SHOW ROW
- [10] a DISPLAT ENDING MESSAGE AND EXIT
- [11] O+'TO START ANOTHER LESSON, ENTER: LESSON NAME
- [12] →0
- [13] A VECTOR ARGUMENT; FRINT ERROR MSG AND EXIT
- [14] OOFS1: De'LESSON MUST BE FOLLOWED BY A SINGLE PARAMETER, ', CB, 'TO RES
  TART, ENTER: LESSON MNN (WHERE NNN IS A THREE-DIGIT NUMBER)
- [15] →0
- [16] A LESSON NOT FOUND; PRINT ERROR MSG AND EXIT
- [17] OOPS3: [+'SORRY, INFORMATION ABOUT THIS SYMBOL IS NOT AVAILABLE AT THIS TIME.', CR, FOR HELP WITH ANOTHER SYMBOL, ENTER: HELP.'

•

- V SHOW ROW; NAME; G; RANK; FNAME; T; RT; WT; GV; AV; TTPE; ARG; SS; F; DT M
- [1] A CALLED BY SCHEDULE, LESSON; CALLS ASK, RUNDRILL, TRY, SQUEEZE
- [2] A REQUIRES GLOBAL VARIABLE MAT
- [3] A SET VARIABLES CORRESPONDING TO ROW
- [4] NAME+, MAT[ROW; HAMECOL]
- [5] FNAMELSQUEEZE, MAT[ROW; FNAMECOL]
- [6] SYM+MAT[ROW; SYMCOL]
- [7] RANK+MAT[ROW; SVXACOL]
- [8] TYPE+MAT[ROW; MDCOL]
- [9] ARG+MAT[ROW; NKCOL]
- [10] & GO TO 'MA' IF HELP VARIABLE DOES NOT EXIST; ELSE GO ON
- [11] +NAX1(0=QMC HAME)
- [12] a INITIALIZE TOTAL QUESTION, WRONG AMSWER COUNTERS
- [13] RT+WT+0
- [14] Y+10
- [15] 8-----
- [16] a DISPLAT GENERAL PORTION OF HELP VARIABLE
- [17] [+(0 1)+((:NAME)[;1]=',')/:MAME
- [18] & GENERAL QUESTIONS
- [19] QV+1, (5x1TYPE='D'),6
- [20] AV+(+1+TYPE='D'), SQUEEZE RANK
- [21] GV ASK AV
- [22] A CHECK NUMBER OF RIGHT ANSWERS
- [23] WT SUMASK RT
- [24] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO OH
- [25] +HALTXY=2
- [26] A-----
- [27] A DISPLAY SCALAR PORTION OF HELP VARIABLE
- [28] [+(0 1)+((\*NAME)[;1]='.')/\*HAME
- [29] A SCALAR QUESTIONS
- [30] +SDX (TYPE='M'
- [31] @V+2
- [32] AV+'NY'[1+SYME'+x[L=#v#AA']

- [33] RV ASK AV
- [34] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
- [35] +HALTXY=2
- [36] A SCALAR DRILL
- [38] +VX1((SYME'+xP,')ATYPE='M')V(SYME')')ATYPE='D'
- [39] 1 RUNDRILL 1
- [40] & IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO OM
- [41] +HALTXY=2
- [42] 8-----
- [43] A DISPLAY VECTOR PORTION OF HELP VARIABLE
- [44] V:D+(0 1)+((:HAME)[;1]='v')/:NAME
- [45] A ASK VECTOR QUESTIONS
- [46] AVDXITYPE='M'
- [47] QY+3
- [48] AV+'FT'[1+5YM(55,'+[:\$\$00+\\_++']
- [49] QV ASK AV
- [50] a IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
- [51] +HALTXY=2
- [52] a VECTOR DRILL
- [54] +VSX1(SYME'1')
- [55] 1 RUNDRILL 2
- [56] a IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
- [57] +HALTXY=2
- [58] VS: +VVX \ (SYME ' 4/44') ATYPE='M'
- [59] +XX1(SYME'PT+00')VTYPE='M'
- [60] 2 RUNDRILL 1
- [61] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
- [62] +HALTXY=2
- [63] VV:+XX\SYME';'
- [64] 2 RUNDRILL 2
- [65] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON

```
[66] +HALTXY=2
[67] a----
[68] # DISPLAY MATRIX PORTION OF HELF VARIABLE
[69] X:0+(0 1)+((±NAME)[;1]='n')/±NAME
[70] A ASK MATRIX QUESTIONS
[71] +AXITYPE='M'
[72] QV+4
[73] AV+'FT'[1+5YME'+-x+x@:[L]=#(())v*A*']
[74] GV ASK AV
[75] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO OM
[76] >HALTXY=2
[77] A MATRIX DRILL
[78] MD: ATYPE RUNDRILL 3
[79] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
[80] +HALTXY=2
[81] 4-----
[82] A DISPLAY ALL ARRAYS PORTION OF HELP VARIABLE
[83] A: 0+(0 1)+((:NAME)[;1]='x')/:NAME
[84] A ASK ALL ARRAYS QUESTIONS
[85] QV+8,9x1xF++/(1 2)x,ARG; 'KE'
[86] AV+('NY'[1+xF]), SQUEEZE ' CRB'[1+F]
[87] QV ASK AV
[88] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
[89] +HALTXY=2
[90] 6-----
[91] & SUMMARIZE STUDENT PERFORMANCE
[92] SUM; WT SUMASK RT
[93] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
[94] +HALTXY=2
[95] A-----
```

[99] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON

[96] # CALL TRY FOR SELECTED SYMBOLS
[97] EXP: +ENDX \ (SYME '+-x+') \ ATYPE='D'

[98] TRY SYM

- [100] +HALTXY=2
- [101] 8-----
- [102] A LESSON COMPLETE; IF NAN=0 (TEACH), EXIT; ELSE GO ON
- [103] END: +0x1HHH=0
- [104] a NNN+0 (LESSON); SET LASTLESSON TO THIS LESSON MR
- [105] OUT:LASTLESSON+NNN
- [106] & DISPLAY MSG AND EXIT
- [107] ## CE, 'THIS IS THE END OF YOUR LESSON,'
- [108] DEFOR THE HEXT LESSON IN SEQUENCE, ENTER: LESSON NEXTLESSON:
- [109] →0
- [110] # HELP VAR NOT AVAILABLE; DISPLAY ERROR MSS AND EXIT
- [111] MA:CR, SORRY, INFORMATION ABOUT ', FNAME, ' IS NOT AVAILABLE AT THIS TIME.'
- [112] →0
- [113] HALT: CR, 'THIS LESSON HAS BEEN HALTED. '

V

- Q QUES ASK AHS;R;W;I;A;L;AR;RK;Q
- [1] A CALLED BY SHOW; CALLS SCORE
- [2] A REQUIRES NON-LOCAL VARIABLES RT, WT, Y, GLOBAL CUES
- [3] A ASSIGN THE NUMBER OF QUESTIONS TO 'R'
- [4] Rep, QUES
- [5] A ASSIGNS TOTAL NUMBER OF QUESTIONS TO 'RT'
- [6] RT+RT+R
- [7] A IF HR OF QUESTIONS # NR OF ANSWERS, GO TO 'COPS'; ELSE GO OF
- [8] +00PSX(R#P,AHS
- [9] A INITIALIZE COUNTER, CHARACTER VARS
- [10] I+0
- [11] A START LOOF; INCREMENT COUNTER; INITALIZE WRONG ANSWER COUNT
- [12] START: I+I+1
- C133 ₩+0
- [14] A ASSIGN QUESTION AND ANSWER PARAMETERS FOR ASK FUNCTION
- [13] A+(,AMS)[1]
- [16] G+CE, +CUES[(, GUES)[1];]
- [17] & CALL 'SCORE' TO EVALUATE THE QUESTION
- [18] QUERY: A SCORE G
- [19] & IF FLAG INDICATES 'REPEAT', RETURN TO SAME QUESTION;
- [20] & IF FLAG INDICATES 'STOP' RESPONSE, EXIT; ELSE GO ON
- [21] +(QUERY,0)[Y]
- [22] A IF QUESTIONS REMAIN, RETURN TO 'START'; ELSE EXIT
- [23] +STARTX\I(R
- [24] →0
- [25]  $_{8}$  FOR DEBUGGING; ARGUMENTS NOT SAME LENGTH; PRINT ERROR MSG AND EXI

[26] OOPS: [L+'PQUES # PAHS'

- V A SCORE GINAUT
- [1] R CALLED BY ASK
- [2] A REQUIRES NON-LOCAL VARIABLES Y, W, WT
- [3] A DISPLAY TEXT OF QUESTION
- [4] 0+Q
- [5] A ASSIGN RESPONSE TO 'INPUT' AFTER DELETING BLANKS
- [6] INFUT+SQUEEZE INPUT+[
- [7] A IF RESPONSE IS NULL, ADD 1 WRONG ANS AND GO TO 'LAST'; ELSE GO ON
- TURNIQ=0+TW+TW [8]
- [9] +LASTX10=FINFUT
- [10] A IF RESPONSE IS 'STOP', GO TO 'OUT'; ELSE GO ON
- [11] +OUTx (4=+/+/IMFUT.,='STOP'
- [12] A IF RESPONSE # RIGHT ANSWER, GO TO 'WRONG'; ELSE GO ON
- [13] MEXT: + WRONG x ( , IMPUT)[1] #A
- [14] A DISPLAY MSG
- [15] De'RIGHT'
- [16] A SET FLAG TO HULL; EXIT
- [17] →0,7+10
- [18] A INCREMENT WRONG ANSWER COUNTERS
- [19] WRONG: W+W+1
- [20] WT+WT+1
- [21] A GO TO LAST IF THREE WRONG ANSWERS TO THIS QUESTION; ELSE GO ON
- [22] +LASTX1W13
- [23] A DISPLAY MSG
- [24] O+'SORRY, PLEASE TRY AGAIN'
- [25] a SET FLAG TO INDICATE REPEAT QUESTION; EXIT
- [26] →0,Y+1
- [27] a →0
- [28] A THREE WRONG ANSWERS; DISPLAY MSG
- [29] LAST: De'SORRY, THE CORRECT ANSWER IS ', A
- [30] A SET FLAG TO INDICATE GO TO NEXT QUESTION; EXIT
- [31] +0,7+10
- [32] A SET FLAG TO INDICATE 'STOP' RESPONSE
- [33] OUT:Y+2

V WT SUMASK R

- [1] A CALLED BY SHOW AFTER ALL 'ASK' CALLS
- [2] A IF FEWER WRONG RESPONSES THAN QUESTIONS, EXIT; ELSE SO ON
- [3] +OXIWTER
- [4] A WRONG RESPONSES > QUESTIONS; DISPLAY MESSAGE AND EXIT
- [5] GETYOU ENTERED ',(+WT),' WRONG ANSWERS OUT OF ',(+R),' QUESTIONS,'
- [6] OF IF YOU WANT TO RETAKE THIS LESSON, ENTER: LESSON ', +, MAT[SOW; LESCOL]
- [7] Ye2

v

- ▼ L RUNDRILL H;FUNC;R;K1;K2;R;A;W;C;M
- [1] & CALLED BY SHOW; CALLS DRILL, PULL
- [2] A REQUIRES NON-LOCAL VARIABLES SYM, TYPE
- [3] A INITIALIZE ANSWER COUNTERS
- [4] C+W+0
- [5] START:
- [6] A EXTEND SYM FOR REDUCTION, SCAN
- [7]  $SYME((SYME'/\frac{1}{2})/('+-[[=')[?5]),SYH)$
- [8] A FORMAT FUNCTION DISPLAY
- E93 R+(1,1,2)EN3
- [10] FUNC+(R,3);' ',5YM,'
- [11] A SET MULTIPLIER
- [12] M+?3
- [13] A PULL RANDOM NUMBER ARGUMENTS
- [14] K1+1 PULL L
- [15] K2+2 PULL H
- [16] a IF K1 IS EMPTY VECTOR, EXIT; ELSE GO ON
- [17] +0x10=f,K1
- [18] A IF TYPE IS MONADIC, GO TO MONTY; ELSE GO ON
- [19] +MONTYX TTPE='M'
- [20] a FORMAT DYADIC Q / A
- [21] G+(+K1), FUNC, +K2
- [22] A+1(+,K1),SYM,+,K2
- [23] →RUN
- [24] a FORMAT MONADIC R/A
- [25] MONTY:
- [26] @+FUHC,+K2
- [27] A+±5YM,+,K2
- [28] # RUN DRILL
- [29] RUN; G DRILL A
- [30] A DELETE EXTRA SYMBOL (IF ANY)
- [31] SYM+-145YM
- [32] A IF STOP FLAG IS SET, EXIT; ELSE GO ON

```
[33] +0x^{\gamma}=2
```

[34] A IF WRONG ANSWERS 2 3, GO TO 'FEV'; ELSE GO ON

[35] AREVXIW13

[36] a IF RIGHT ANSWERS ( 1, RETURN TO 'START'; ELSE EXIT

[37] +STARTX(C(1

[38] →0

[39] REV:

[40] OF THIS FUNCTION OF THE PERCEPTION OF THIS FUNCTION OF TALK WITH YOUR', CE, ' INSTRUCTOR REFORE RETURNING TO THIS UNIT.'

[41] Y+2

- ♥ Z+P PULL H;R;C;L;H;E;POOL
- [1] A CALLED BY RUNDRILL
- [2] A REQUIRES NON-LOCAL VARIABLES SYM, M
- [3] A SET DEFAULT VALUE
- [4] Z+10
- [5] A P IS 1 FOR LEFT ARG, 2 FOR RIGHT ARG
- [6] A SET MULTIPLIER BASED ON M FROM 1 TO 3(EXCEPT MONADIC [[)
- [7] MULTE((10xM-2);0,1)E1+(STME1];'[L')^(TYPE='M')^~(T1+FYH);'/\XX\]
- [8]  $_{8}$  N is rank of desired random array; assign rows and columns to  $\kappa$  . ND  $_{\mbox{\scriptsize C}}$
- [9] RE(1,1,2)[N]
- [10] C+(1,(1+M),2)[N]
- [11] A DETERMINE LIMITS BASED ON TYPE OF SYMBOL
- [12] FOND: POOL +10
- [13] POOL+FOOL, (SYM[1]; '+-x[[, ((=)) #; #4')/MULTxH,0,-H+19
- [14] POOL+FOOL, ((SYM[1]:'+++|030')AF=2)/MULTXH, O,-H
- [15] POOL+POOL, ((SYM[1]:'^+0&&')^F=1)/E,-E+1[M
- [16] POOL+POOL,((SYM[1]&'((1\*f'))/2,3,4
- [17] POOL+FOOL, (SYM[1]:'+')/MULTxD,~D+2,4,5,8
- [18] POOL+POOL, (SYM[1] E'VAVAN')/ 0 1
- [19] POOL(POOL, ((SYM[1]='e') ATYPE='M')/1, x \ 3
- [20] APZX1(TYPE='M')VSYM[1]#'@'
- [21] A KLUGE FOR LOGARITHM--K2 ALWAYS A POWER OF K1 (FOOL IS EMPTY)
- [22] POOL+POOL, ((SYM[1]='0') \(TYPE='D') \(\text{AP=1}\)/2,3,10
- [23] +PZX1P=1
- [24] Z+(R,C)p((SYM[1]='@')ATYPE='D')/(,K1)x?(p,K1)p3
- [25] \* IF NO NUMBERS IN POOL, EXIT; ELSE GO ON
- [26] PZ:+0x10=PPOOL
- [27] POOL+100,FOOL
- [28] # PROVIDE ARRAY OF RANDOM NRS
- [29] Z+(R,C)/POOL[(RxC)?100]

- Q @ DRILL A;B;SB;SQ;L
- [1] A CALLED BY RUNDRILL; CALLS SQUEEZE
- [2] A REGUIRES HOH-LOCAL VARIABLES C, W; GLOBAL CR
- [3] START:
- [4] Y+10
- [5] A DISPLAY DRILL QUESTION
- [6] ASK: [1+CR, WHAT IS THE RESULT OF:
- [7] U+@
- [8] A IF REPONSE IS 'STOP', GO TO 'HALT'; ELSE GO ON
- [9] +HALTX14=+/+/'STOP'. =SB+SQUEEZE B+@
- [10] a IF ANSWER IS NULL, GO TO WE; ELSE GO ON
- [11] +WRX10=FSB
- [12] A CHECK FOR HUMERIC RESPONSE
- [13] CK: +HAX1(0e5Be'1234567890. T') VMOE5Be'T.
- [14] a IF LENGTH OF RESPONSE  $\neq$  LENGTH OF GIVEN ANSWER, GO TO 'WR'; ELSE GO ON
- [15] +WRX1(F,A) #F, 18
- [16] A IF RESPONSE = GIVEN ANSWER, GO TO 'RT'; ELSE GO ON
- [17] +RTX1((,A)A,=,±B)
- [18] A ANSWER IS WRONG; DISPLAY ANSWER
- [19] WR: 0+'SORRY, COPRECT ANSWER IS:
- [20] D+A
- [21] A INCREMENT WRONG ANSWER COUNTER AND RETURN TO RUNDRILL
- [22] W+W+1
- [23] →0
- [24] A ANSWER IS RIGHT; DISPLAY MESSAGE
- [25] RT: D+ 'CORRECT!'
- [26] A INCREMENT RIGHT ANSWER COUNTER AND RETURN
- [27] C+C+1
- [28] +0
- [29] NA: []+'SORRY, THIS ANSWER NOT ACCEPTABLE, PLEASE ENTER A NUMERIC ANSWER.'
- [30] +ASK

[31] A STOP AT STUDENT REQUEST; SET FLAG AND EXIT

[32] HALT:+0,T+2

⊽

- TRY SYM; W; B; T; C; TW
- [1] A CALLED BY SHOW; CALLS RUN
- [2] A REQUIRES NON-LOCAL VARIABLES ROW, SYM, FNAME
- [3] TW+0
- [4] RESTART: TW+TW+1
- [5] A GO TO OUCH IF RESTART COUNTER EQUALS 3
- [6] +OUCHX1TW=3
- [7] A INITIALIZE FLAGS AND WRONG AMSWER COUNTER
- ERI TECHWED
- [9] A REQUEST STUDENT INPUT A LOGICAL EXPRESSION USING THE SYMBOL
- [10] START:
- [11] @+CR, WRITE A TRUE STATEMENT USING ',SYM,',',CR,'FOR EXAMPLE: 4=2+2'
- [12] A IF RESPONSE IS 'STOP', GO TO 'HALT'; ELSE GO ON
- [13] +HALTX14=+/+/'STOF' .= 8+0
- [14] a IF RESPONSE IS A MULL OR A MAME, GO TO 'WRONG'; ELSE GO ON
- [15] +WRONGX1(4#[HC B) +0=PB
- [16] A SET T=1 IF STATEMENT IS TRUE
- [17] HEXT: T+1=1B
- [18] A SET C=1 IF STATEMENT CONTAINS THE SYMBOL
- [19] C+SYMEB
- [20] A GO TO RIGHT IF T AND C SOTH EQUAL 1; ELSE GO ON
- [21] +RIGHTX1TAC
- [22] & ANSWER IS WRONG; INCREMENT COUNTER
- [23] WRONG: W+W+1
- [24] 8 GO TO REV IF WRONG ANSWER COUNTER EQUALS 3
- [25] +REVX1#=3
- [26] A GO TO HOSYM IF THE STATEMENT IS TRUE; ELSE GO ON
- [27] HOSYMXIT
- [28] # PRINT ERROR MSG
- [29] HT: 0+'SORRY, THIS STATEMENT IS NOT TRUE.
- [30]  $_{\rm R}$  GO TO NOSYM IF THE STATEMENT DOES NOT CONTAIN THE SYMBOL; ELSE GO ON

- [31] HNOSYMXING
- [32] A PRINT MSG AND RETURN TO START
- [33] De'TRY AGAIN,
- [34] →START
- [35] a PRINT ERROR MSG AND RETURN TO START
- [36] MOSYM: []+'YOUR AMSWER DOES NOT USE ',SYM,', TRY AGAIN,'
- [37] +START
- [38] A PRINT MSG AND EXIT
- [39] RIGHT: De'CORRECT!
- [40] →0
- [41] A PRINT MSG AND RESTART
- [42] REV: Deck, 'DO YOU WISH TO REVIEW THE DESCRIPTION OF ', FHAME, '?', CE, '
  ENTER Y OR N.'
- [43] A IF RESPONSE IS MULL OR NOT Y, GO TO RESTART, ELSE GO ON
- [44] +RESTARTX10=FB+0
- [45] →RESTARTX1'Y'≠B
- [46] A DISPLAY HELP VARIABLE, THEN RESTART
- [47] RUN ROW
- [48] ARESTART
- [49] A THREE RESTARTS; DISPLAY MESSAGE AND EXIT
- [50] DUCH: D+'PLEASE SEE YOUR INSTRUCTOR FOR ASSISTANCE.
- €513 +0
- [52] A STOP AT STUDENT REQUEST; SET FLAG AND EXIT
- £533 HALT:+0, Y+2

- V TEST NUM; NAME; G; RANK; FNAME; T; RT; WT; QV; AV; TTPE; ARG; SS
- [1] A USED TO TEST DRILL ; CALLS RUNDRILL, TRY, SQUEZZE
- [2] A SET VARIABLES CORRESPONDING TO ROW
- [3] ROW+((1,MAT[;LESCOL])=NNH)/((PMAT)[1]
- [4] NAME+, HAT[ROW; NAMECOL]
- [5] FNAME+SQUEEZE, MATEROW; FNAMECOL]
- [6] STM+MAT[ROW; STMCOL]
- [7] RANK+MAT[ROW; SVKACOL]
- [8] TYPE+MAT[ROW; MDCOL]
- [9] ARG+MAT[ROW; MKCOL]
- [10] Y+10
- [11] A SCALAR DRILL
- [13] +Vxl((SYMe'+xp,')ATYPE='M')v(SYMe'l')ATYPE='D'
- [14] 1 RUNDRILL 1
- [15] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE SO ON
- [16] +HALTXY=2
- [17] V: -VEX1(0=[NC HAME)
- [18] A VECTOR DRILL
- [20] +VSX1(SYME'1')
- [21] 1 RUNDRILL 2
- [22] & IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
- [23] +HALTXY=2
- [24] VS:+VVX1(SYME'@P+&')ATYPE='M'
- [25] +XX1(SYME'PA+00') VTYPE='M'
- [26] 2 RUNDRILL 1
- [27] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON
- [28] +HALTXY=2
- [29] VV: +XX15YME'1'
- [30] 2 RUNDRILL 2
- [31] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO ON

```
[32] +HALTXY=2
```

- [33] X: +MDX1(0=DNC NAME)
- [34] MD: +AXIW(STME 'P')ATTPE= 'Y'
- [35] 1 RUNDRILL 3
- [36] A IF FLAG INDICATES 'STOP' RESPONSE, GO TO HALT; ELSE GO OH
- [37] +HALTXY=2
- [38] A: D+ TEST OK
- [39] →0
- [40] HALT; CR, 'THIS TEST HAS BEEN HALTED, '

Δ

- V ZEHEXTLESSON; I; V
- [1] AFIND INDEX OF LAST LESSON IN VECTOR OF LESSON NUMBERS
- [2] I+(V+1,MAT[;LESCOL]) | LASTLESSON
- [3] ARETURN MEXT LESSON NUMBER IN SEQUENCE
- [4] Z+V[I+1]

.

- ORDERMAT; OM; ICOM
- [1] A SORTS THE VARIABLE 'MAT' IN ACSEMBING ORDER OF LESSON NUMBER
- [2] A CREATE VECTOR OF LESSON HES
- [3] OM+1, MAT[;14]
- [4] A FIND INDEXES OF LESSONS IN ORDER
- [5] ICOM+40M
- [6] A REDRDER MAT ACCORDING TO INDEXES
- [7] MATHMAT[ICOM;]

₹

- V ZESQUEEZE STRING
- [1] A CALLED BY HELP, RUN, TEACH, SHOW, SCORE, DRILL
- [2] A DELETES BLANKS IN CHARACTER STRING ARGUMENT
- [3] Ze(' '#, STRING)/, STRING

7

.

#### C. VARIABLES

# 1. <u>Global variables</u>

The following section contains all of the global variables in the TUTOR workspace except the text variables (part C) and the user's guide variables called by the STARF function (appendix A). MAT is the most important variable in TUTOR, as it is called on to cross-index symbols, lesson numbers, function names, and selected function characteristics. The variables with names anding in COL index the columns of MAT for use in the functions, so that these columns can be rearranged if necessary. CUES provides questions for use in the ASK function, and all of the twoletter, underlined variables (except CR) contain sets of multiple-choice answers for use with CUES. The other important global variable is LASTLESSON which is given a value by the SHOW function to indicate the last lesson completed. All other variables used in TUTOR functions are local variables at some level of the calling hierarchy.

|     | MAT      | •  |    |     |   |          |      |                 |
|-----|----------|----|----|-----|---|----------|------|-----------------|
| 101 | -        | М  |    | н   |   | s        | HEGA | NEGATIVE_NUMBER |
| 102 | +        | М  |    | И   |   | A        | CBBO | COMJUSATE       |
| 103 | +        | D  | 14 | 14  | A | A        | FLUS | PLUS            |
| 104 | -        | M  |    | 34  |   | A        | СНАН | CHANGE_SIGN     |
| 105 | -        | D  | И  | н   | A | A        | UHIM | MIHUS           |
| 106 | x        | M  |    | H   |   | A        | SIGH | SIGNUM          |
| 107 | X        | ø  | 7- | ы   | A | A        | TIME | TIMES           |
| 108 | ÷        | м  |    | Н   |   | A        | RECI | RECIPROCAL      |
| 109 | ÷        | D  | Ħ  | 14  | A | A        | DIVI | DIVIDE          |
| 121 | ()       | М  |    | Ε   |   | A        | PARE | PARENS          |
| 122 | 1.1      | М  |    | K   |   | ٧        | ачат | QUOTE           |
| 123 | +        | D  | K  | Έ   | ٧ | A        | SPEC | SPECIFICATION   |
| 124 | F        | M  |    | E   |   | A        | SHAP | SHAPE           |
| 125 | ۶        | D  | И  | E   | ٧ | A        | RESH | RESHAPE         |
| 126 | []       | D  | Ε  | 14  | A | A        | BRAC | BRACKETS        |
| 127 | ,        | M  |    | E   |   | A        | RAVE | RAVEL           |
| 128 | ,        | Ď  | E  | E   | A | <u>a</u> | CATE | CATENATE        |
| 129 | ì        | M  |    | ы   |   | V        | INDE | INDEX_GENERATOR |
| 131 | /        | M  |    | ε   |   | Α        | RED2 | FEDUCTION       |
| 132 | +        | M  |    | Ε   |   | А        | RED1 | REDUCTION       |
| 141 | *        | M  |    | И   |   | A        | EXPO | EXPONENTIAL     |
| 142 | <b>t</b> | I) | Н  | 14  | A | A        | FOWE | POWER           |
| 143 | •        | M  |    | H   |   | A        | NATU | HATURAL_LOG     |
| 144 | 9        | D  | Н  | 1-6 | A | A        | LOGA | LOGARITHM       |
| 145 | 0        | M  |    | н   |   | A        | PITI | PI_TIMES        |
| 146 | 0        | D  | Н  | 14  | A | A        | GEOM | GEOMETRIC       |
| 147 | :        | М  |    | н   |   | A        | FACT | FACTORIAL       |
| 148 | :        | ۵  | н  | Н   | A | A        | BINO | BIHOMIAL        |
| 149 | 1        | M  |    | н   |   | A        | MAGH | MAGNITUDE       |
| 151 | ١        | M  |    | E   |   | A        | SCA2 | SCAN            |
| 152 | +        | H  |    | E   |   | A        | SCA1 | SCAN            |

162

CEILING

FLOOR

FLOO

```
MAXIMUM
163
        Γ
            D
                 H H
                        A A
                              HAXI
164
       L
            Ð
                 n n
                        A A
                              MINI
                                      MIHIMUM
                                       RESIDUE
165
            D
                        A A
                               RESI
        į
                 H H
            M
                   н
                          ٧
                              GRUP
                                      GRAFE_UP
166
                                      GRADE_DOWN
167
                          ٧
                              GRAD
                   И
                                       ROLL
168
        ?
                   н
                          Α
                               ROLL
169
            D
                 HH
                        5 5
                              DEAL
                                       DEAL
       ?
                                       EQUAL
180
            D
                 E E
                        A A
                               EQUA
        =
181
                        A A
                              MOTE
                                      HOT_EQUAL
       ¥
            Ľı
                 EE
182
                        A A
                               LESS
                                      LESS_THAN
        ₹
            D
                 HH
183
            Þ
                 H H
                        AA
                              LTEG
                                      LESS_OR_EQUAL
184
        <u>></u>
            D
                 H H
                        A A
                               GTEQ
                                       GREATER_OF_EQUAL
185
            Đ
                 14 14
                        AA
                              GREA
                                       GREATER_THAN
        >
191
                          A
                               HOT
                                       NOT
            М
                   B
                                      AHD
192
            D
                 B B
                        A A
                              AND
            D
                        A A
                              HAND
                                      HAHD
193
                 B B
194
                              OR
                                      0R
            D
                        A A
        ٧
                 B B
195
            D
                        A A
                              HOR
                                      HOR
                 BB
                                       MEMBER OF
196
            Ð
                 EE
                        A A
                               HEHR
        ٤
201
                   Ε
                              REV2
                                      REVERSE
            М
                          Α
        Φ
                   E
                          5
                                      REVERSE
202
            M
                              REV1
       0
                                      ROTATE
203
                 H E
                        A A
                              ROT2
            D
       •
204
       8
            D
                 HE
                        A A
                              ROT1
                                      ROTATE
205
            M
                   Ε
                          A
                              TRAM
                                      TRANSFOSE-MONADIC
       Ø
                                      TRANSPOSE-DYADIC
206
            D
                 HE
                        V A
                              TRAD
       3
                              TAKE
                                      TAKE
211
            D
                 H E
                        V A
                                      DROP
                              DROP
212
            D
                 NE
                        V A
213
            D
                 BE
                        V A
                              COM2
                                      COMPRESS
                                      COMPRESS
214
                        V A
                              COM1
            D
                 BE
215
            D
                        V A
                               EXP2
                                      EXPAND
                                      EXPAND
216
            D
                 BE
                        V A
                              EXP1
       4
                                      LAMINATE
                 EE
                              LAMI
219
            D
                        AA
                                      MATRIX_INVERSE
231
       9
                          Х
                              MATI
232
            D
                 н н
                       хх
                                      MATRIX_DIVIDE
       8
                              MATD
```

| 241 | ۰, | D | EE | A | A | OUTE | OUTER_PRODUCT  |
|-----|----|---|----|---|---|------|----------------|
| 242 | •  | ā | EE | A | A | ІннЕ | INHER_PRODUCT  |
| 301 | ١  | D | EE | ٧ | A | OGHI | INDEX_OF       |
| 304 | τ  | D | нн | A | A | EHCO | ENCODE         |
| 305 | 1  | D | ни | A | A | DECO | DECODE         |
| 306 | 1  | м | x  |   | V | EXEC | EXECUTE        |
| 307 | +  | D | нн | V | A | DYFO | FORMAT-DYADIC  |
| 308 | ٠  | м | Ε  |   | A | FORM | FORMAT-MONADIC |

LESCOL

1 2 3 4

SYMCOL

8

MDCOL

12

HKCOL

16 18

SVXACOL

22 24

HAMECOL

28 29 30 31

FNAMECOL

35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51

CUES

'HOW MANY ARGUMENTS DOES THE ', FNAME, ' FUNCTION TAKE?'

'DOES 51',5TM,'52 EQUAL 52',5TM,'51?'

- 'IF ONE ARGUMENT IS A VECTOR, THE OTHER ARGUMENT MAY BE SCALAR OR VECTOR . (T/F)'
- 'IF OHE ARGUMENT IS A MATRIX, THE OTHER ARGUMENT MUST BE A SCALAR',  $\overline{c}\overline{c}$ , 'OR A MATRIX OF THE SAME SHAPE, (T/F)'
- 'WHAT RANK CAN THE LEFT ARGUMENT OF ', FNAME, ' BE?', RK
- 'WHAT RANK CAN THE RIGHT ARGUMENT OF ', FNAME, ' BE?', EK
- IDO THE ARGUMENTS ALWAYS HAVE TO HAVE THE SAME RANK?!
- 'CAN ', FNAME, ' TAKE CHARACTER ARGUMENTS?'
- 'IF SO, WHICH ARGUMENT(S) CAN BE CHARACTER?', AR
- 'DOES ', FNAME, ' TAKE BOOLEAN (1 OR 0) ARGUMENTS?'
- 'IF SO, WHICH ARGUMENT(S) MUST BE BOOLEAM?', AR

.AR

ENTER R FOR RIGHT,

- L FOR LEFT, OR
- B FOR BOTH
- .RK

ENTER S FOR SCALAR

- V FOR VECTOR
- X FOR MATRIX
- A FOR ANY RANK

## 2. Text variables

The following global variables contain the basic text of the TUTOR course. They are printed in the same order as the lessons. The header above each variable is not part of the text; it lists the lesson number, the short title of the variables, and the full name of the function. The first column control characters are omitted here.

THE SYMBOL T (UPSHIFT 2) IS USED ONLY TO ENTER REGATIVE NUMBERS, IT CAN BE USED ONLY IN FRONT OF SCALARS (SINGLE NUMBERS), NOT VARIABLE NAMES, ARITHMETIC EXPRESSIONS, OR ARRAYS.

TO CHANGE ARITHMETIC SIGN USE THE SYMBOL - (UPSHIFT +).

THE SYMBOL + IS USED FOR THE MONADIC CONJUGATE FUNCTION.

THIS IS AN IDENTITY FUNCTION WHICH RETURNS ITS ARGUMENT, AFTER

EVALUATION IF NECESSARY. IT TAKES NUMERIC ARGUMENTS OF ANY RANK.

EXAMPLE: +2 => 2 + 3+2 => -1.

THE SYMBOL + IS USED FOR THE DYADIC PLUS FUNCTION. THIS PERFORMS SIMPLE ADDITION ON NUMERIC ARGUMENTS OF ANY RANK.

FOR EXAMPLE: 2+2 => 4 SPACING IS NOT IMPORTANT,

TO ADD A SCALAR TO EACH ELEMENT OF A VECTOR, ENTER EITHER SAV OR VAS. V1+V2 WILL ADD TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

 $2+(3 4 5) \Rightarrow 5 6 7$   $(3 4 5)+2 \Rightarrow 5 6 7$ 

 $(3 \ 4 \ 5)+(5 \ 6 \ 7) = > 8 \ 10 \ 12$ 

IF THE TWO VECTORS BEING ADDED ARE NOT THE SAME LENGTH, YOU WILL GET A 'LENGTH ERROR'.

MATRIX ADDITION IS DONE AS FOLLOWS:

S+M OR M+S WILL ADD THE SCALAR S TO EACH ELEMENT OF THE MATRIX H.

FOR EXAMPLE: IF M =) 1 2 THEH 3+M => 4 5 AND M+3 => 4 5

3 4

5 6

M1+M2 WILL ADD THE MATRIX M1 TO THE MATRIX M2, ELEMENT BY ELEMENT.

FOR EXAMPLE: IF M1  $\pm$ > 1 2 AND M2  $\pm$ > 3 4 THEN M1+M2  $\pm$ > 4 6

3 4

8 10

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT. TRYING TO ADD A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

THE SYMBOL - (UPSHIFT +) IS USED FOR THE MONADIC CHANGE SIGN FUNCTION.

THIS CHANGES THE ARITHMETIC SIGN OF ITS NUMERIC ARGUMENT OF ANY FANK.

FOR EXAMPLE: -(1 -2 3) => -1 2 -3.

NOTE THE DIFFERENCE BETWEEN - AND - (UPSHIFT 2), WHICH INDICATES

NEGATIVE NUMBERS.

105 MINUS

MINU

THE SYMBOL - (UPSHIFT +) IS USED FOR THE DYADIC MINUS FUNCTION.

IT PERFORMS SIMPLE SUBTRACTION ON NUMERIC ARGUMENTS OF ANY RANK.

TO SUBTRACT A SCALAR FROM EACH ELEMENT OF A VECTOR, ENTER V-E. TO SUBTRACT EACH ELEMENT OF A VECTOR FROM THE SAME SCALAR, ENTER S-V, V1-V2 will subtract each element of V2 from the corresponding element of V1.

v1 AND v2 MUST BE THE SAME LENGTH OR YOU WILL GET A 'LENGTH EFROR'. FOR EXAMPLE:  $(3\ 4\ 5)-2 \Rightarrow 1\ 2\ 3 \qquad 2-(3\ 4\ 5) \Rightarrow 1\ 72\ 73$   $(6\ 7\ 8)-(1\ 2\ 3) \Rightarrow 5\ 5\ 5$ 

ENTER M-S TO SUBTRACT THE SCALAR S FROM EACH ELEMENT OF THE MATFIX %. ENTER S-M TO DO THE OPPOSITE.

FOR EXAMPLE: IF M => 1 2 THEN 4-M  $\approx$ > 3 2 AND M-2  $\Rightarrow$ > ~1 0

3 4 1 0 1 2

M1-M2 SUBTRACTS MATRIX M2 FROM MATRIX M1, ELEMENT BY ELEMENT.

FOR EXAMPLE: IF  $H1 \Rightarrow 12$  AND  $H2 \Rightarrow 34$  THEN  $H2-H1 \Rightarrow 22$ 

3 4 5 6 2 2

IF M1 AND M2 ARE NOT THE SAME SHAPE, A 'LENGTH ERROR' WILL RESULT.

TRYING TO SUBTRACT A VECTOR FROM A MATRIX OR VICE-VERSA WILL

PRODUCE A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

THE SYMBOL x IS USED FOR THE MONADIC SIGNUM FUNCTION,

IT RETURNS THE ARITHMETIC SIGN OF THE ARGUMENT: 1 FOR POSITIVE NUMBERS,

T1 FOR NEGATIVE NUMBERS, AND 0 FOR ZERO VALUES.

IT TAKES NUMERIC ARGUMENTS OF ANY RANK,

FOR EXAMPLE: x(3-2) = 1-1 x(3+2-5) = 0

TIMES

TIME

THE SYMBOL  $\chi$  is used for the dyadic times function. This performs simple multiplication on numeric arguments of any rank.

FOR EXAMPLE: 2x4 => 8 ORDER AND SPACING ARE NOT IMPORTANT.

TO MULTIPY EACH ELEMENT OF A VECTOR BY A SCALAR, ENTER SXV OR  $V\chi s$ , V1xV2 RESULTS IN THE PRODUCT OF CORRESPONDING ELEMENTS OF V1 AND V2. FOR EXAMPLE: 3x(1 2 3) = 3 6 9 (1 2 3)x3 = 3 6 9

 $(1 \ 2 \ 3) \times (2 \ 4 \ 6) \Rightarrow 2 \ 3 \ 18$ 

IF V1 AND V2 ARE NOT THE SAME LENGTH, YOU WILL GET A 'LENGTH ERROR'.

EITHER MXS OR SXM WILL MULTIPLY A MATRIX BY A SCALAR, THE RESULT WILL BE A MATRIX THE SAME SHAPE AS M.

FOR EXAMPLE: IF M => 1 2 THEN 3xM => 3 6 AND Mx3 => 3 6 3 4 9 12 9 12

M1XM2 WILL RETURN THE PRODUCT OF CORRESPONDING ELEMENTS IN M1 AND M2. M1 AND M2 MUST BE THE SAME SHAPE OR YOU WILL GET A "LENGTH EFROR".

FOR EXAMPLE: IF  $M1 \Rightarrow 1.2$  AND  $M2 \Rightarrow 3.4$  THEN  $M1xM2 \Rightarrow 3.8$ 

3 4 5 6 15 24

IT IS IMPORTANT TO NOTE THAT MULTIPLYING MATRIXES WILL MOT RESULT IN 'MATRIX MULTIPLICATION' (INNER PRODUCT OR DOT PRODUCT).

FOR INFORMATION ON INNER PRODUCT, REQUEST HELP ON ',' (DOT OR PERIOD).

MULTIPLYING A VECTOR WITH A MATRIX WILL RESULT IN A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

THE SYMBOL  $\pm$  (UPSHIFT  $\pm$ ) IS USED FOR THE MONADIC RECIPROCAL FUNCTION. THIS RETURNS THE RESULT OF 1 DIVIDED BY THE ARGUMENT. ITS ARGUMENT MUST BE NUMERIC AND CAN BE OF ANY RANK. HOWEVER, IF THE ARGUMENT HAS VALUE O, A 'DOMAIN ERROR' WILL SEBULT. 

109 DIVIDE DIVI

THE SYMBOL + (UPSHIFT X) IS USED FOR THE DYADIC DIVISION FUNCTION.

IT PERFORMS SIMPLE DIVISION ON NUMERIC ARGUMENTS OF ANY RANK.

TO DIVIDE A SCALAR BY EACH ELEMENT OF A MECTOR, ENTER SAME, TO DIVIDE EACH ELEMENT OF A MECTOR BY THE SAME SCALAR, ENTER MASS. WIAM DIVIDES EACH ELEMENT OF MI BY THE CORRESPONDING ELEMENT OF MI AND MI MUST BE THE SAME LENGTH OR YOU WILL GET A "LENGTH ERROR". FOR EXAMPLE:  $(3.4.5) \div 2 = 1.5.2.2.5$   $3\div (3.4.5) = 1.75.6$   $(3.6.9)\div (1.2.3) = 3.3.3$ 

ENTER SOM TO DIVIDE THE SCALAR S BY EACH ELEMENT OF THE MATRIX M.

MAS WILL DIVIDE EACH ELEMENT OF M BY S. BOTH OPERATIONS RESULT IN

A MATRIX THE SAME SHAPE AS M.

FOR EXAMPLE: IF M => 1 2 THEN 2+M => 2 1 AND M+2 => 0.5 1 4 5 0.5 0.4 2 2.5

M1+M2 DIVIDES MATRIX M1 BY MATRIX M2, ELEMENT BY ELEMENT.

FOR EXAMPLE: IF M1 => 2 4 AND M2 => 1 2 THEN M1+M2  $\Rightarrow$  2 2 6 8 3 4 2 2

IF W1 AND M2 ARE NOT THE SAME SHAPE, A 'LENGTH ERROR' WILL RESULT.

TRYING TO DIVIDE A MATRIX BY A VECTOR OR VICE-VERSA WILL PRODUCE A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

PARENTHESES ARE USED TO GROUP SYMBOLS FOR CORRECT PROCESSING BY
THE APL INTERPRETER.

APL DIFFERS FROM EVERY OTHER COMPUTER LANGUAGE IN THE WAY IT DETERMINES WHICH OPERATION IS PERFORMED FIRST.

IT SIMPLY READS FROM RIGHT TO LEFT -- 'BACKWARDS' -- AND PERFORMS EACH OPERATION AS IT GOES ALONG.

FOR EXAMPLE:  $3x2+1 \Rightarrow 9$  BECAUSE  $2+1 \Rightarrow 3$  AMD  $3x3 \Rightarrow 9$   $1+2x3 \Rightarrow 7$  BECAUSE  $2x3 \Rightarrow 6$  AND  $1+6 \Rightarrow 7$ 

FARENTHESES ARE USED TO OVERRIDE THIS RIGHT-TO-LEFT RULE. FOR EXAMPLE: (3x2)+1=7 AND (1+2)x3=9 EXPRESSIONS WITHIR PARENTHESES ARE EVALUATED FIRST—ALSO FROM RIGHT TO LEFT.

USING THE RIGHT-TO-LEFT RULE CAN ELIMINATE PARENTHESES,
BUT USING PARENTHESES GENEROUSLY CAN ELIMINATE CONFUSION.

122 QUOTE

RUDT

THE QUOTE MARK ' (UPSHIFT K) IS USED TO ENCLOSE CHARACTER DATA, AFL ASSUMES THAT LETTERS (OR COMBINATIONS OF LETTERS AND NUMBERS)

ARE VARIABLE OR FUNCTION NAMES UNLESS THEY ARE ENCLOSED IN QUOTES, FOR EXAMPLE: IN THIS TUTORIAL,

HOW =) (THE VARIABLE MAMED HOW)

'HOW' => HOW

YOU CAN ALSO USE SYMBOLS AND NUMBERS AS CHARACTER DATA.

THE SYMBOL + IS USED FOR SPECIFICATION.

- IT ASSIGNS THE VALUE OF THE RIGHT ARGUMENT TO THE VARIABLE NAME WHICH IS THE LEFT ARGUMENT.
- THE VARIABLE NAME CAN BE ANT COMBINATION OF LETTERS AND NUMBERS (NO STMBOLS AND NO SPACES) WHICH BEGINS WITH A LETTER. LENGTH IS EFFECTIVELY UNLIMITED.
- THE RIGHT ARGUMENT CAN BE EITHER CHARACTER OR NUMERIC, OF ANY RANK.

  TO SPECIFY A CHARACTER VARIABLE, ENCLOSE THE FIGHT ARBUMENT IN

  SINGLE QUOTES (\*) UNLESS IT IS ANOTHER CHARACTER VARIABLE.
- NOTE THAT THE VARIABLE CAN BE USED IN THE SAME LINE AS THE VALUE IS SPECIFIED. FOR EXAMPLE:
  - 843+7+2 RESULTS IN X HAVING VALUE 2 AND Y HAVING VALUE 5 847+241 RESULTS IN X, Y, AND 2 ALL HAVING VALUE 1
  - V41 2 3 RESULTS IN V HAVING VECTOR VALUE (1 2 3)
    V1+'APL' RESULTS IN V1 BEING A CHARACTER VECTOR: AFL
    V24V1 RESULTS IN V2 BEING A CHARACTER VECTOR: AFL
- SEE HELP ON \$ (UPSHIFT R) FOR INFORMATION ON SPECIFYING MATRIX VARIABLES.

THE STREOL P IS 115ED FOR THE MONADIC SHAPE FUNCTION.

THIS RETURNS A DESCRIPTION OF THE SIZE OF ITS ARGUMENT, WHICH CAN BE NUMERIC OF CHARACTER, OF ANY RANK.

THE STREEL CAR BE USED TWICE (FFA) TO RETURN THE RANK OF ITS ARGUMENT.

- IF THE ARCHAEUT IS A SCALAR, fS RETURNS NO NUMBER (AN EMPTY VECTOR), SCHAUSE A SCALAR HAS NO DIMENSION. ffS = 0
- ENTERTHS , V RETURNS ONE NUMBER WHICH REPRESENTS THE LENGTH OF THE VECTOR'S ONE DIMENSION. FRV  $\pm$ ) 1
- THE SHAFF OF MATRIXES IS EXPRESSED AS A TWO-ELEMENT VECTOR.

  THE FIRST ELEMENT EQUALS THE NUMBER OF ROWS (THE LENGTH OF THE FIRST DIMENSION), AND THE SECOND ELEMENT EQUALS THE NUMBER OF COLUMNS (THE LENGTH OF THE SECOND DIMENSION).
- FOR EXAMPLE: IF M  $\Rightarrow$  1 2 3 THEN FM  $\Rightarrow$  2 3 AND FFM  $\Rightarrow$  2 4 5 6
- FOR HIGHER-LEVEL ARRAYS, A WILL BE A VECTOR WITH AS MANY ELEMENTS AS A HAS DIMERSIONS. THE NUMBER OF COLUMNS WILL ALWAYS BE THE LAST ELEMENT OF A. THE NUMBER OF ROWS WILL ALWAYS BE THE NEXT-TO-LAST ELEMENT, PRECEDED BY THE NUMBER OF 'PAGES' OR PLANES, PRECEDED BY THE NUMBER OF 'BOOKS' OR SPACES, AND SO ON.
- FOR EXAMPLE: IF D IS A 4-DIMENSIONAL ARRAY, ppD =, 4.

  IF pD => 5 3 4 2 THEN D HAS 5 BOCKS, EACH WITH 3 PAGES, EACH OF WHICH HAS 4 ROWS AND 2 COLUMNS. (THIS WOULD BE DISPLAYED AS FIFTEEN SUCCESSIVE 4x2 MATRIXES...THE FIRST THREE BEING THE FIRST BOOK, THE SECOND THREE BEING THE SECOND BOOK, ETC.)

THE STABOL P IS USED FOR THE DYADIC RESHAPE FUNCTION.

THIS TAKES THE ELEMENTS OF THE RIGHT ARGUMENT AND REARRANGES THEM ACCORDING TO THE SHAPE SPECIFIED BY THE LEFT ARGUMENT.

THE LEFT ARGUMENT MUST BE AN INTEGER SCALAR OR A VECTOR OF INTEGER ELEMENTS.

THE RIGHT ARGUMENT CAN BE NUMERIC OR CHARACTER, OF ANY RANK.

IF THE LEFT ARGUMENT IS A SCALAR, THE RESULT WILL BE A VECTOR WITH LENGTH EQUAL TO THE SCALAR, CONSISTING OF THE ELEMENTS OF THE RIGHT ARGUMENT, TAKEN IN ORDER TOP LEFT TO BOTTOM RIGHT.

WHEN THERE ARE NOT ENOUGH ELEMENTS IN THE RIGHT ARGUMENT,

THE FUNCTION WILL START OVER AND TAKE THE ELEMENTS IN ORDER AGAIN,

AS MANY TIMES AS RECESSARY TO FILL THE VECTOR.

FOR EXAMPLE: 481 = 1111148(48) = 1488

125

IF THERE ARE TOO MANY ELEMENTS ON THE RIGHT, THE EXTRAS ARE OMITTED. FOR EXAMPLE: -29(1/2/3/4) = 9/1/2

IF THE LEFT ARGUMENT IS A VECTOR, THE ELEMENTS INDICATE, IN ORDER, LENGTH OF EACH DIMENSION IN THE RESULT.

FOR EXAMPLE: 2 281 2 3 4 => 1 2

3 4

THIS IS ONE WAT TO ENTER MATRIXES OR ARRAYS OF HIGHER DIMENSION.

USING A MATRIX OR HIGHER-LEVEL ARRAY AS THE LEFT ARGUMENT OF RESHAPE WILL RESULT IN A 'RANK ERROR'.

- DYADIC SQUARE BRACKETS ARE USED TO INDEX THE ELEMENTS OF AN ARRAY.

  THEY CAN BE THOUGHT OF AS ENCLOSING SUBSCRIPTS.
- THE LEFT ARGUMENT (LEFT OF THE BRACKETS) CAN BE A NUMERIC OR CHARACTER ARRAY OF ANY RANK, BUT NOT A SCALAR, INDEXING A SCALAR WILL RESULT IN A FRANK ERROR!
- THE RIGHT ARGUMENT (SETWEEN THE BRACKETS) MUST BE ONE OR MORE
  INTEGER SCALARS OR VECTORS, SEPARATED SY SEMICOLONS (;). THERE
  MUST BE AS MAIN SCALARS/VECTORS AS THERE ARE DIMENSIONS IN THE
  LEFT ARGUMENT, OR A "MANY EXROR" WILL RESULT.
- ANT NUMERIC EXPRESSIONS WITHIN THE BRACKETS WILL BE EVALUATED AS IF THE BRACKETS AND SEMICOLOUS ARE PARENTHESES.
- BRACKETS CAM ALSO BE USED FOLLOWING THESE STABOLS: ,/\/\pho+
- THERE IS ONLY ONE SCALAR OR VECTOR WITHIN THE BRACKETS BECAUSE VECTORS HAVE OMLY ONE DIMENSION.
- MATRIXES REQUIRE TWO SUBSCRIPTS--TWO SCALARS OR VECTORS, SEPARATED BY A SEMICOLOM(;), WITHIN THE BRACKETS.
- THE FIRST SUBSCRIPT REFERS TO THE ROW, THE SECOND TO THE COLUMN.

  FOR EXAMPLE: IF M => 1 2 3 THEN M[1;1] => 1 AND M[1 3;2] => 2 8
  - 4 5 6
  - 789
- TO SELECT AN ENTIRE ROW (OR ROWS), ENTER THE ROW SUBSCRIPT FOLLOWED BY A SEMICOLON, WITH NO COLUMN SUBSCRIPT.
- FOR EXAMPLE: M[1;] => 1 2 3
- FOR ENTIRE COLUMN(S), LEAVE THE ROW SUBCRIPT BLANK AND ENTER A SEMI-COLON FOLLOWED BY THE COLUMN SUBSCRIPT(S).

FOR EXAMPLE: IF M1 => FOR THEM M1[;1] => FYI

YOUR

INFO

NOTICE THAT ONE SOW OR ONE COLUMN OF A MATRIX IS SIMPLY A VECTOR, NOT A 1XC OR FX1 MATRIX. A SINGLE ELEMENT OF A MATRIX IS A SCALAR, NOT A  $1\chi_1$  MATRIX OF A VECTOR OF LENGTH 1.

THE USE OF BRACKETS CAN BE EXTENDED TO HIGHER DIMENSIONS BY ADDING A SEMICOLON AND A SCALAR OR VECTOR FOR EACH DIMENSION.

FOR ENAMPLE, IF yM=1/2/3/4/5, THE SECOND BOOK, THIRD PAGE, FIRST ROW (ALL COLUMNS) CAN BE SELECTED BY ENTERING M[2;3;1;].

THE STMBOL, IS USED FOR THE MONADIC RAVEL FUNCTION.

THIS FUNCTION CHANGES ITS ARGUMENT TO THE FORM OF A VECTOR. IT TAKES EITHER NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK.

TO CHANGE A SCALAR TO A VECTOR OF LENGTH 1, ENTER ,S. FOR EMAMPLE: pp3 = 0 BUT pp3 = 0 1

THIS CAN BE USEFUL TO ENSURE THAT A VARIABLE IS A VECTOR WHEN USING A SCALAR WOULD LEAD TO AN ERROR (E.G., IMDEXING).

VECTORS FEMAIN UNCHANGED BY RAVELLING.

MATRIXES ARE CHANGED INTO A SINGLE LONG VECTOR, STARTING WITH THE TOP FOW AND READING ACROSS EACH ROW FROM LEFT TO RIGHT. FOR EXAMPLE: IF M1 => 1 2 THEN , H1 => 1 2 3 4 3 4

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

CATE CATENATE 123

THE SYMBOL , IS USED FOR THE DYADIC CATENATE FUNCTION. THIS FUNCTION WILL COMBINE TWO SCALARS OR ARRAYS INTO A SINGLE ASRAY. IT TAKES EITHER MUMERIC OR CHARACTER ARGUMENTS.

ENTERING \$1,52 WILL RESULT IN A VECTOR (\$1 \$2). FOR EXAMPLE: Netto will assign the vector value (1 2) to the variable V.

VECTORS CAN EASILY BE EXTENDED BY CATEMATING S,V OR V,S OR V,V. FOR EXAMPLE: IF V => 1 2 THEN

 $\vee_{,3} = 123$   $0, \vee_{,2} = 012$   $\vee_{,2} = 1212$ 

CATEMATING A SCALAR TO A MATRIX WILL RESULT IN A MATRIX WITH ONE MORE COLUMN THAM THE MATRIX ARGUMENT. ALL ENTRIES IN THIS COLUMN WILL HAVE THE VALUE OF THE SCALAR. FOR ENAMPLE:

IF H = 1 2 THE: 5, H = 1 5 1 2 AND H = 1 2 55 3 4 3 4

CATENATING TWO MATRIXES WILL RESULT IN A MATRIX CONTAINING THE TWO GRIGINAL MATRIXES 'SIDE BY SIDE'.

POTH MATRIXES MUST HAVE THE SAME NUMBER OF ROWS OR A 'LENGTH ERROR' WILL RESULT.

FOR EXAMPLE: IF M1 => 1 2 AHD 42 => 5 6

THEN M1, M2 => 1 2 5 6 APP M2, M1 => 5 6 1 2 7834 3 4 7 8

TRYING TO CATENATE A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS. FOR MORE INFORMATION ON DIFFERENT WAYS TO JOIN ARRAYS, SEE MENU FOR LAMINATE.

......

THE SYMBOL  $\chi$  (UPSHIFT I) IS USED FOR THE MONADIC INDEX GENERATING SUNCTION.

- IT IS USED WITH A SINGLE NON-MEGATIVE INTEGER ARGUMENT (SCALAR, OR VECTOR OF LENGTH 1).
- IT RETURNS A VECTOR OF INTEGERS, IN ORDER, REGINNING WITH THE INDEX ORIGIN, AND ENDING WITH THE ARGUMENT.
- FOR EXAMPLE:  $\chi 3 = 1.2.3$   $\chi 0 = 9$  (AN EMPTY VECTOR) THE IPDES ORIGIN IS NORMALLY (BY DEFAULT) 1.
- USING  $\chi$  WITH A MON-INTEGER, REGATIVE OR ARRAY ARGUMENT WILL PRODUCE A 'DOMAIN ERROR'.

......

THE SYMBOL / IS USED FOLLOWING ANOTHER FUNCTION SYMBOL AND PRECEDING A SINGLE ARGUMENT TO PRODUCE THE MIXED FUNCTION CALLED REDUCTION.

REDUCTION MAY BE USED WITH NUMERIC ARGUMENTS OF ANY RANK.

REDUCTION MAY ALSO BE USED WITH CHARACTER ARGUMENTS IF THE FUNCTION

IT IS BEING COMBINED WITH ACCEPTS CHARACTER ARGUMENTS.

USING / WITH A SCALAR SIMPLY RETURNS THE SCALAR.

WHEN USED WITH A VECTOR, REDUCTION GIVES THE SAME EFFECT AS INSERTING
THE OTHER FUNCTION SYMBOL BETWEEN EACH VALUE OF THE VECTOR.

FOR EXAMPLE:

 $+/(1 \ 2 \ 3) =) 6 BECAUSE 1+2+3 =) 6$ 

x/(2 3 4) = 24 RECAUSE 2x3x4 = 24

WHEN USING REDUCTION, ALWAYS REMEMBER APL READS RIGHT TO LEFT:

-/(1 2 3) = 2 BECAUSE 1-(2-3) = 2

QUOTICE THIS PRODUCES THE EFFECT OF SUMMATION WITH ALTERNATING SIGHE.)

WHEN USED WITH A MATRIX, / WILL PERFORM AS IF EACH COLUMN IS

A UNIT. IT WILL ADD THE CORRESPONDING ELEMENTS OF EACH COLUMN,

SO THAT THE AMSWER WILL BE A VECTOR WITH AS MANY ELEMENTS AS

THERE WERE SOWS IN THE ARGUMENT.

FOR EXAMPLE: IF fM =/ 2 4 THEN f+/M => 2

APL USERS FERR TO THIS AS WORKING 'ACROSS' OR 'OVER' THE COLUMNS.

SINCE COLUMNS ARE THE SECOND OF TWO DIMENSIONS OF A MATRIX,

THIS MEANS THAT THE STMBOL / WORKS 'OVER' THE LAST DIMENSION.

TO REDUCE OVER THE FIRST DIMENSION (E.G. ROWS OF A MATRIX), USE THE SIMBOL  $\neq$  (ALT /), IN PLACE OF /.

THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS.

FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF MAGES, ROWS, AND

- TO REDUCE OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN ORACKETS FOLLOWING THE # (OR THE /) SIMBOL.
- FOR EMAMPLE, TO PLUS REDUCE OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA, ENTER +/[2]AA OR +/[2]AA. TO PLUS REDUCE OVER THE PAGES, ENTER +/AA OR +/[1]AA. TO PLUS REDUCE OVER THE COLUMNS, ENTER +/AA OR +/[3]AA.
- THE SHAPE OF THE ANSWER WILL ALWAYS BE THE SAME AS THE SHAPE OF THE ARGUMENT UMITTING THE DIMENSION REDUCED OVER.
- FOR EXAMPLE: IF pA = p = 3.4.5THER p+pA = p = 3.4.5 p+pE21A = p = 3.5.5 p+pA = p = 4.5

THE SYMBOL  $\neq$  (ALT  $\neq$ ) IS USED FOLLOWING ANOTHER FUNCTION SYMBOL AND PRECEDING A SINGLE ARGUMENT TO PRODUCE THE MIXED FUNCTION CALLED REDUCTION.

REDUCTION MAY BE USED WITH NUMERIC ARGUMENTS OF ANY RANK.

REDUCTION MAY ALSO BE USED WITH CHARACTER ARGUMENTS IF THE FUNCTION

IT IS BEING COMBINED WITH ACCEPTS CHARACTER ARGUMENTS.

USING # WITH A SCALAR SIMPLY RETURNS THE SCALAR.

WHEN USED WITH A VECTOR, REDUCTION GIVES THE SAME EFFECT AS INSERTING THE OTHER FUNCTION SYMBOL RETWEEN EACH VALUE OF THE VECTOR.

## FOR EXAMPLE:

+/(1 2 3) => 6 SECAUSE 1+2+3 => 6

x/(2 3 4) = 24 SECAUSE 2x3x4 = 24

WHEN USING REDUCTION, ALWAYS REMEMBER ARL READS RIGHT TO LEFT:

-+(1 2 3) = 2 FECAUSE 1+(2-3) = 2

(NOTICE THIS PRODUCES THE EFFECT OF SUMMATION WITH ALTERNATING SIGHE,)

- WHEN USED WITH A MATRIX,  $\neq$  WILL PERFORM AS IF EACH ROW IS A UNIT. IT WILL ADD THE CORRESPONDING ELEMENTS OF EACH ROW, SO THAT THE ANSWER WILL BE A VECTOR WITH AS MANY ELEMENTS AS THERE WERE COLUMNS IN THE ARGUMENT.
- FOR EXAMPLE: IF \$M => 2.4 THEN \$+\forall => 4

  APL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE ROWS.

  SINCE ROWS ARE THE FIRST OF TWO DIMENSIONS OF A MATRIX,

  THIS MEANS THAT THE SYMBOL \(\psi\) WORKS 'OVER' THE FIRST DIMENSION.

  TO REDUCE OVER THE LAST DIMENSION (E.G. COLUMNS OF A MATRIX). USE THE SYMBOL \(\forall\) IN PLACE OF \(\forall\).
- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS,

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF FAGES, ROWS, AND

|     | A140 117 | INS' | TRUCTIO | NAL FAC<br>A K A | ILITY(L | JAGE) TU<br>J) NAVAU<br>JEC 83 | POSTG | RADUATE | SCHOOL<br>F/G 5/9 | 2/3<br>NL |  |
|-----|----------|------|---------|------------------|---------|--------------------------------|-------|---------|-------------------|-----------|--|
| UNC | LASSIFIC |      |         |                  |         |                                |       |         | 170 373           |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          | ŀ    |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |
|     |          |      |         |                  |         |                                |       |         |                   |           |  |



MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS-1963-A

1

- COLUMNS, / WILL REDUCE OVER THE COLUMNS, / OVER THE PAGES.

  TO REDUCE OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN

  APACHETS FOLLOWING THE / (OR THE /) SYMBOL.
- FOR EXAMPLE, TO PLUS REDUCE OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA, ENTER +/[2]AA OR +/[2]AA. TO PLUS REDUCE OVER THE PAGES, ENTER +/AA OR +/[1]AA. TO PLUS REDUCE OVER THE COLUMNS, ENTER +/AA OR +/[3]AA.
- THE SHARE OF THE ANSWER WILL ALWAYS BE THE SAME AS THE SHAPE OF THE ARGUMENT OMITTING THE DIMENSION REDUCED OVER.
- FOR EXAMPLE: IF pA = 3.4.5THEN p+/A = 3.4.5 p+/(2)A = 3.5 p+/A = 3.4.5

THE SYMBOL & (UPSHIFT P) IS USED FOR THE MONADIC EXPONENTIAL FUNCTION, IT RETURNS THE VALUE OF THE CONSTANT E TO THE POWER OF THE ARGUMENT, IT TAKES NUMERIC ARGUMENTS OF ANY RANK.

FOR EXAMPLE: #0 => 1 #1 => 2.718281828

\*.5 => 1.648721271

\*(3 <sup>-</sup>2) => 20.08553692 .1353352832

THE SYMBOL & (UPSHIFT P) IS USED FOR THE DYADIC POWER FUNCTION.

THIS RETURNS THE VALUE(S) OF THE LEFT ARGUMENT RAISED TO THE POWER OF RIGHT ARGUMENT, ARGUMENTS ARE NUMERIC OF ANY RANK.

A NON-INTEGER RIGHT ARGUMENT CAN BE USED TO OBTAIN ROOTS.

FOR EXAMPLE: 2x3 => 8

3±0 => 1

4x.5 => 2

TO RAISE EACH ELEMENT OF A VECTOR TO THE SAME POWER, ENTER  $V_{\pm}P_{\star}$  TO RAISE A SCALAR TO A SERIES OF POWERS REPRESENTED BY A VECTOR, ENTER  $S_{\pm}V_{\star}$ 

 $v_{1*}v_{2}$  results in the elements of  $v_{1}$  being raised to the power of the corresponding element in  $v_{2}$ .

V1 AND V2 MUST HAVE THE SAME NUMBER OF ELEMENTS OR A 'LENGTH ERROR' WILL RESULT,

FOR EXAMPLE:  $3x(1 2 3) \Rightarrow 3 9 27$  (1 2 3)x3 => 1 8 27 (2 3 4)x(5 4 3) => 32 81 64

TO RAISE EACH ELEMENT OF THE MATRIX M TO THE SAME POWER S, ENTER MAS. TO RAISE THE SCALAR S TO THE POWER OF EACH ELEMENT IN THE MATRIX M, ENTER SAM,

THE RESULT WILL BE A MATRIX THE SAME SHAPE AS M.

FOR EXAMPLE: IF M => 1 2 THEN 3xM => 3 9 AND M23 => 1 8 3 4 27 81 27 64

 $M_{12}M_{2}$  RESULTS IN THE ELEMENTS OF  $M_{1}$  RAISED TO THE POWER OF THE CORRESPONDING ELEMENT IN  $M_{2}$ .

FOR EHAMPLE; IF M1 => 1 2 AND M2 => 4 3 THEN M1#M2 => 1 8

3 4 2 1 9

IF M1 AND M2 ARE NOT THE SAME SHAPE, A 'LENGTH ERROR' WILL OCCUR, IF ONE ARGUMENT IS A VECTOR WHILE THE OTHER ARGUMENT IS A MATRIX, THE RESULT WILL BE A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

THE SYMBOL . (ALT 8) IS USED FOR THE MONADIC NATURAL LOG FUNCTION.

IT RETURNS THE VALUE OF THE POWER TO WHICH THE CONSTANT E MUST BE RAISED TO EQUAL THE ARGUMENT. IN OTHER WORDS, ENTERING as will solve the APL EQUATION  $\pm N \pm N = 100$  M.

IT TAKES ONLY POSITIVE NUMERIC ARGUMENTS OF ANY RANK. USING . WITH ZERO OR WITH MEGATIVE ARGUMENTS WILL RESULT IN A 'DOMAIN ERROR'.

@1.648721271 => 0.5

FOR EXAMPLE: #(3 2) => 1.098612289 0.6931471806

THE SYMBOL • (ALT 8) IS USED FOR THE DYADIC LOGARITHM FUNCTION.

THIS RETURNS THE LOGARITHM OF THE RIGHT ARGUMENT IN THE BASE OF THE

LEFT ARGUMENT. THAT IS, IT RETURNS THE VALUE OF THE POWER TO

WHICH THE LEFT ARGUMENT MUST BE RAISED TO EQUAL THE RIGHT ARGUMENT.

ENTER LOR TO SOLVE THE EQUATION LAN = R FOR N.

ARGUMENTS ARE POSITIVE NUMERIC OF ANY RANK, USING @ WITH ZERO OR WITH NEGATIVE NUMBERS WILL RESULT IN A 'DOMAIN ERROR', ENTERING 1@S WHERE S IS ANY NUMBER EXCEPT 1 WILL ALSO PRODUCE A 'DOMAIN ERROR',

FOR EXAMPLE: 100100 => 2 201024 => 10 901 => 0

- TO OBTAIN THE LOG OF EACH ELEMENT OF A VECTOR IN THE SAME BASE, ENTER BEV.
- TO DETERMINE THE LOG OF A SCALAR IN A VECTOR OF DIFFERENT BASES, ENTER Vas.
- $v_{1} = v_{2}$  results in the log of each element in  $v_{2}$  in the base of the corresponding element in  $v_{1}$ .
- $v_1$  and  $v_2$  must have the same number of elements or a 'length error' will result.

FOR EXAMPLE:  $30(3 9 27) \Rightarrow 1 2 3$  (2 4)016  $\Rightarrow$  4 2 (2 3 5)0(4 9 25)  $\Rightarrow$  2 2 2

ANALOGOUS RESULTS ARE OBTAINED FOR MATRIXES AND HIGHER LEVEL ARRAYS, UNLESSS ONE ARGUMENT IS A SCALAR, BOTH ARGUMENTS MUST BE THE SAME SHAPE. OTHERWISE, A 'RANK ERROR' OR 'LENGTH ERROR' WILL RESULT.

..... G .......

THE SYMBOL 0 (UPSHIFT O) IS USED FOR THE MONADIC PI TIMES FUNCTION.

IT RETURNS THE VALUE OF THE CONSTANT PI TIMES THE ARGUMENT.

IT TAKES NUMERIC ARGUMENTS OF ANY RANK.

FOR EXAMPLE: GO => 0 01 => 3.141592654

0.3 => 1.570796327

@(3 72) => 9.424777961 76.283185307

THE SYMBOL @ (UPSHIFT D) IS USED FOR THE DYADIC GEOMETRIC FUNCTIONS.

THESE INCLUDE THE MAIN TRIGINOMETRIC FUNCTIONS. THE LEFT ARGUMENT,

WHICH MUST BE AN INTEGER FROM 77 TO 7, DETERMINES WHICH FUNCTION

IS CALLED. THE RIGHT ARGUMENT, WHICH CAN BE A NUMERIC ARRAY OF

ANY RANK, REPRESENTS THE VALUE OF AN ANGLE IN RADIANS.

THE FOLLOWING FUNCTIONS ARE REPRESENTED:

007 => COS (ARCSIN Y) OR SIN (ARCCOS Y) WHERE  $\{Y\}(1)$ 107 => SIN Y TOY => ARCSIN Y WHERE  $\{Y\}(1)$ 

207 => COS Y T20Y => ARCCOS Y WHERE [Y](1

30Y => TAN Y TOTAL TOTAL

40° => COSH (ARCSINH Y) T40° => SINH (ARCCOSH Y) WHERE | Y|>1

50Y => SINH Y T50Y => ARCSINH Y

60Y => COSH Y TENT TENT => ARCCOSH Y WHERE Y>1

79Y => TANH Y TOY => ARCTANH Y WHERE |Y|(1

OTHER FUNCTIONS, SUCH AS SECANT, MUST BE COMPUTED BY FORMULA.

FOR EXAMPLE: (REMEMBER 01 EQUALS PI TIMES 1)

100 => 0 1001 => 0 100.5 => 1

NOTICE THAT SOMETIMES A VERY SMALL NUMBER WILL APPEAR INSTEAD OF ZERO,

OR A VERY LARGE NUMBER WILL APPEAR INSTEAD OF A DOMAIN ERROR.

TECHNICALLY, THE TANGENT OF ONE-HALF PI DOES NOT EXIST, BUT:

300.5 => 5.734161139E15 WATCH OUT FOR THIS:

......

THE SYMBOL : (ALT +) IS USED FOR THE MONADIC FACTORIAL FUNCTION. IT RETURNS THE FACTORIAL OF HON-NEGATIVE NUMERIC ARGUMENTS OF ANY RANK, FOR EXAMPLE:  $\{1\ 3\ 0\ =\}\ 1\ 6\ 1$ 

USING NON-INTEGER ARGUMENTS PRODUCES THE GAMMA FUNCTION OF THE  ${\sf ARGUMENT+1}$ .

FOR EXAMPLE: 1.5 => .8862269255 (GAMMA OF 1.5)

THE SYMBOL ! (ALT +) IS USED FOR THE DYADIC BINOMIAL FUNCTION.

IT TAKES NUMERIC ARGUMENTS OF ANY RANK.

FOR POSITIVE INTEGER ARGUMENTS, LIR WILL RETURN THE NUMBER OF WAYS OF TAKING R OBJECTS L AT A TIME.

THIS IS THE BIHOMIAL COEFFICIENT OF R OVER L, COMPUTED (!R)+!LX!(R-L). WITH NEGATIVE OR NON-INTEGER ARGUMENTS, THE BINOMIAL FUNCTION RETURNS A VALUE BASED ON THE BETA FUNCTION.

 $3!4 \Rightarrow 4$  RUT  $4!3 \Rightarrow 0$ FOR EXAMPLE: BECAUSE THERE ARE FOUR WAYS OF TAKING FOUR OBJECTS THREE AT A TIME, BUT THERE IS NO WAY TO TAKE THREE OBJECTS FOUR AT A TIME.

0:0 => 1

42:42 => 0:42 => 1

WHEN A SCALAR ARGUMENT IS PAIRED WITH A VECTOR ARGUMENT, THE FUNCTION COMBINES THE SCALAR WITH EACH ELEMENT OF THE VECTOR IN TURN.

2!(3 4 5) = 3 6 10 (3 4 5)!5 = 10 5 1

THESE ANSWERS ARE BASED ON CONVENTION:

CORRESPONDING ELEMENTS OF TWO VECTOR ARGUMENTS ARE COMBINED.

 $(3 \ 4 \ 5):(5 \ 6 \ 7) \Rightarrow 10 \ 15 \ 21$ 

V1 AND V2 MUST HAVE THE SAME NUMBER OF ELEMENTS OR A 'LENGTH ERROR' WILL RESULT.

WHEN A SCALAR ARGUMENT IS PAIRED WITH A MATRIX ARGUMENT, THE FUNCTION COMBINES THE SCALAR WITH EACH ELEMENT OF THE MATRIX IN TURN.

FOR EXAMPLE: IF M => 1 2 THEN 3!M => 0 0 AND M:3 => 3 3

3 4 1 4

CORRESPONDING ELEMENTS OF TWO MATRIX ARGUMENTS ARE COMBINED.

FOR EXAMPLE: IF M1 => 1 2 AND M2 => 3 4 THEN M1:M2 => 3 6

3 4 5 6

IF M1 AND M2 ARE NOT THE SAME SHAPE, A 'LENGTH ERROR' WILL OCCUR. IF ONE ARGUMENT IS A VECTOR WHILE THE OTHER ARGUMENT IS A MATRIX,

THE RESULT WILL BE A 'RANK ERROR'.

THE SYMBOL | (UPSHIFT M) IS USED FOR THE MONADIC MAGNITUDE FUNCTION,

IT RETURNS THE ABSOLUTE VALUE OF NUMERIC ARGUMENTS OF ANY RANK,

FOR EXAMPLE: |( => 0 | |(-3 -2 10) => 3 2 10

THE STMBOL \ (UPSHIFT /) IS USED FOLLOWING A DYADIC FUNCTION STMBOL,

PRECEDING A SINGLE ARGUMENT PRODUCING A MIXED FUNCTION CALLED SCAN,

SCAN MAY BE USED WITH NUMERIC ARGUMENTS OF ANY RANK,

SCAN MAY ALSO BE USED WITH CHARACTER ARGUMENTS IF THE FUNCTION IT IS

COMBINED WITH ACCEPTS CHARACTER ARGUMENTS.

USING \ WITH A SCALAR SIMPLY RETURNS THE SCALAR.

- WHEN USED WITH A VECTOR, SCAN GIVES THE SAME EFFECT AS INSERTING THE OTHER FUNCTION SYMBOL BETWEEN EACH VALUE OF THE VECTOR, THEN OPERATING PROGRESSIVELY AS FOLLOWS:
- THE FIRST ELEMENT OF THE ANSWER WILL BE THE FIRST ELEMENT OF THE ARGUMENT. THE SECOND ELEMENT WILL BE THE RESULT OF THE MAIN FUNCTION OPERATING ON THE FIRST TWO ELEMENTS OF THE ARGUMENT. THE THIRD ELEMENT OF THE ANSWER WILL BE THE RESULT OF THE MAIN FUNCTION OPERATING AS IN REDUCTION ON THE FIRST THREE ELEMENTS OF THE ARGUMENT, AND SO ON.

THE RESULT WILL ALWAYS BE THE SAME LENGTH AS THE ARGUMENT.

## FOR EXAMPLE!

+\(1 2 3) => 1 3 6 BECAUSE 1 => 1, 1+2 => 3, 1+2+3 => 6  $x \setminus (2 3 4)$  => 2 6 24

WHEN USING SCAN, ALWAYS REMEMBER APL READS RIGHT TO LEFT WHEN IT IS USING REDUCTION ON MORE THAN TWO ELEMENTS OF THE ARGUMENT.  $-1.(1 \ 2 \ 3)$  => 1 T1 2 BECAUSE 1 => 1, 1-2 => T1, 1-(2-3) => 2

WHEN USED WITH A MATRIX, SCAN WILL PERFORM AS IF EACH COLUMN IS

A UNIT. THE FIRST COLUMN OF THE ANSWER IS THE FIRST COLUMN OF

THE ARGUMENT. THE SECOND COLUMN OF THE ANSWER IS THE RESULT OF

OPERATING ON THE FIRST TWO COLUMNS OF THE ARGUMENT, AND SO ON.

APL USERS REFER: TO THIS AS WORKING 'ACROSS' OR 'OVER' THE COLUMNS.

- SINCE COLUMNS ARE THE SECOND OF TWO DIMENSIONS OF A MATRIX, THIS MEANS THAT THE SYMBOL  $\setminus$  WORKS 'OVER' THE LAST DIMENSION, TO SCAM OVER THE FIRST DIMENSION (E.G. ROWS OF A MATRIX), USE THE SYMBOL  $\setminus$  (ALT .), IN PLACE OF  $\setminus$ .
- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS.

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS, \ WILL SCAN OVER THE COLUMNS, \ OVER THE PAGES.
- TO SCAN OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN BRACKETS FOLLOWING THE \ (OR THE \) SYMBOL.
- FOR EXAMPLE, TO PLUS SCAN OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA, ENTER  $+\setminus\{2\}$ AA OR  $+\downarrow\{2\}$ AA, TO PLUS SCAN OVER THE PAGES, ENTER  $+\downarrow$ AA OR  $+\setminus\{1\}$ AA, TO PLUS SCAN OVER THE COLUMNS, ENTER  $+\setminus$ AA OR  $+\downarrow\{3\}$ AA.
- THE RESULT WILL ALWAYS BE THE SAME SHAPE AS THE ARGUMENT.

THE STMBOL & (ALT .) IS USED FOLLOWING A DYADIC FUNCTION STMBOL AND PRECEDING A SINGLE ARGUMENT PRODUCING A MIXED FUNCTION CALLED SCAN.

SCAN MAY BE USED WITH NUMERIC ARGUMENTS OF ANY RANK.

SCAN MAY ALSO BE USED WITH CHARACTER ARGUMENTS IF THE FUNCTION IT IS COMBINED WITH ACCEPTS CHARACTER ARGUMENTS.

USING & WITH A SCALAR SIMPLY RETURNS THE SCALAR.

- WHEN USED WITH A VECTOR, SCAN GIVES THE SAME EFFECT AS INSERTING THE OTHER FUNCTION SYMBOL BETWEEN EACH VALUE OF THE VECTOR, THEN OPERATING PROGRESSIVELY AS FOLLOWS:
- THE FIRST ELEMENT OF THE ANSWER WILL BE THE FIRST ELEMENT OF THE ARGUMENT. THE SECOND ELEMENT WILL BE THE RESULT OF THE MAIN FUNCTION OPERATING ON THE FIRST TWO ELEMENTS OF THE ARGUMENT. THE THIRD ELEMENT OF THE ANSWER WILL BE THE RESULT OF THE MAIN FUNCTION OPERATING AS IN REDUCTION ON THE FIRST THREE ELEMENTS OF THE ARGUMENT, AND SO ON.

THE RESULT WILL ALWAYS BE THE SAME LENGTH AS THE ARGUMENT.

## FOR EXAMPLE:

WHEN USED WITH A MATRIX, SCAN WILL PERFORM AS IF EACH ROW IS

A UNIT, THE FIRST ROW OF THE ANSWER IS THE FIRST ROW OF

THE ARGUMENT, THE SECOND ROW OF THE ANSWER IS THE RESULT OF

OPERATING ON THE FIRST TWO ROWS OF THE ARGUMENT, AND SO ON,

APL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE ROWS.

- SINCE ROWS ARE THE FIRST OF TWO DIMENSIONS OF A MATRIX, THIS MEANS THAT THE SYMBOL  $\frac{1}{2}$  WORKS 'OVER' THE FIRST DIMENSION. TO SCAN OVER THE LAST DIMENSION (E.G. COLUMNS OF A MATRIX), USE THE SYMBOL  $\frac{1}{2}$  (UPSHIFT /), IN PLACE OF  $\frac{1}{4}$ .
- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS. FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS,  $\setminus$  WILL SCAN OVER THE COLUMNS,  $\downarrow$  OVER THE PAGES.
- TO SCAN OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN BRACKETS FOLLOWING THE  $\downarrow$  (OR THE  $\setminus$ ) SYMBOL.
- FOR EXAMPLE, TO PLUS SCAN OVER THE ROWS OF A THREE-DIMENSIONAL AFRAY CALLED AA, ENTER  $+\frac{1}{2}$ AA OR  $+\frac{1}{2}$ AA. TO PLUS SCAN OVER THE PAGES, ENTER  $+\frac{1}{4}$ AA OR  $+\frac{1}{2}$ AA. TO PLUS SCAN OVER THE COLUMNS, ENTER  $+\frac{1}{4}$ AA OR  $+\frac{1}{2}$ AA.
- THE RESULT WILL ALWAYS BE THE SAME SHAPE AS THE ARGUMENT.

THE SYMBOL ( (UPSHIFT S) IS USED FOR THE MONADIC CEILING FUNCTION.

IT RETURNS THE VALUE OF NUMERIC ARGUMENTS OF ANY RANK, 'ROUNDED UP'

TO THE HEAREST INTEGER.

FOR EXAMPLE: (-3.4 0 1.3 2) => -3 0 2 2

THE SYMBOL & (UPSHIFT D) IS USED FOR THE MONADIC FLOOR FUNCTION.

IT RETURNS THE VALUE OF NUMERIC ARGUMENTS OF ANY RANK, 'ROUNDED DOWN'

FOR ENAMPLE: £(73.4 0 1.3 2) => 74 0 1 2

TO THE HEAREST INTEGER.

THE SYMBOL [ (UPSHIFT S) IS USED FOR THE DYADIC MAXIMUM FUNCTION. THIS RETURNS THE MAXIMUM OF ITS TWO ARGUMENTS, WHICH ARE NUMERIC OF ANY RANK.

FOR EXAMPLE: 2[3 => 3

TO CHECK A SCALAR AGAINST EACH ELEMENT OF A VECTOR, ENTER STV OR VIS. V1[V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

 $4\Gamma(3 \ 4 \ 5) \Rightarrow 4 \ 4 \ 5$  (3 4 5)  $\Gamma 5 \Rightarrow 5 \ 5$ 

 $(3.4.5)\Gamma(1.5.9) = 3.5.9$ 

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH, A 'LENGTH ERROR' WILL RESULT.

MATRIX COMPARISON IS DONE AS FOLLOWS!

SIM OR MIS WILL CHECK THE SCALAR S AGAINST EACH ELEMENT OF THE MATRIX M.

FOR EXAMPLE: IF M => 1 2 THEN 3[M => 3 3 AND M[3 => 3 3

3 4 3 4

M1[M2 WILL COMPARE THE MATRIXES M1 AND M2, ELEMENT BY ELEMENT,

FOR EXAMPLE: IF M1 => 1 2 AND M2 => 3 4 THEN M1[M2 => 3 4

3 4 5 6

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT. TRYING TO COMPARE A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL ( (UPSHIFT D) IS USED FOR THE DYADIC MINIMUM FUNCTION.

THIS RETURNS THE MINIMUM OF ITS TWO ARGUMENTS, WHICH ARE NUMERIC

OF ANY RANK.

FOR EXAMPLE: 2L3 => 2

TO CHECK A SCALAR AGAINST EACH ELEMENT OF A VECTOR, ENTER SLV OR VLS. V1LV2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

41(3 4 5) => 3 4 4

(3 4 5)L5 => 3 4 5

 $(3 \ 4 \ 5)L(1 \ 5 \ 9) \implies 1 \ 4 \ 5$ 

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH, A 'LENGTH ERROR' WILL RESULT.

MATRIX COMPARISON IS DONE AS FOLLOWS:

SLM OR MLS WILL CHECK THE SCALAR S AGAINST EACH ELEMENT OF THE MATRIX M.

FOR EXAMPLE: IF M => 1 2 THEN 3LM => 1 2 AND ML3 => 1 2

3 4 3 3

33

MILM2 WILL COMPARE THE NATRIXES MI AND M2, ELEMENT BY ELEMENT.

FOR EXAMPLE: IF M1 => 1 2 AND M2 => 3 4 THEN M1[M2 => 1 2

3 4 5 6

3 4

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT. TRYING TO COMPARE A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

......

THE SYMBOL | (UPSHIFT M) IS USED FOR THE DYADIC RESIDUE FUNCTION. IT TAKES NUMERIC ARGUMENTS OF ANY RANK.

THE RESULT OF LIR IS THE REMAINDER WHEN R IS DIVIDED BY L. THIS IS SIMILAR TO THE 'MODULO' FUNCTION IN OTHER COMPUTER LANGUAGES.

## FOR EXAMPLE:

111.24 => .24 10174 => 2 74110 => 72

THE SIGN OF THE RESULT IS ALWAYS THE SAME AS THE SIGN OF THE LEFT ARGUMENT. IF THE SIGNS OF THE ARGUMENTS DO NOT AGREE, THE RESULT IS OBTAINED BY ADDING THE SHALLER ARGUMENT TO THE LARGER ONE REPEATEDLY UNTIL THE ABSOLUTE VALUE OF THE RESULT IS LESS THAN THE ABSOLUTE VALUE OF THE SMALLER ARGUMENT.

WHEN A SCALAR ARGUMENT IS PAIRED WITH A VECTOR ARGUMENT, THE FUNCTION COMBINES THE SCALAR WITH EACH ELEMENT OF THE VECTOR IN TURN.

21(1 2 3 4 5) => 1 0 1 0 1 (1 2 3 4 5)|3 => 0 1 0 3 3 CORRESPONDING ELEMENTS OF TWO VECTOR ARGUMENTS ARE COMBINED.

 $(1 \ 1.5 \ 2) \mid (1 \ 2 \ 3) = > 0 \ 0.5 \ 1$ 

 $v_1$  and  $v_2$  must have the same number of elements or a 'length error' will result.

WHEN A SCALAR ARGUMENT IS PAIRED WITH A MATRIX ARGUMENT, THE FUNCTION COMBINES THE SCALAR WITH EACH ELEMENT OF THE MATRIX IN TURN.

FOR EXAMPLE; IF M => 1 2 THEN 3(M => 1 2 AND M(3 => 0 1

3 4 0 1 0 3

CORRESPONDING ELEMENTS OF TWO MATRIX ARGUMENTS ARE COMBINED.

FOR EXAMPLE; IF H1 => 1 2 AND H2 => 3 4 THEN H1 | H2 => 2 2

34 56 22

IF M1 AND M2 ARE NOT THE SAME SHAPE, A 'LENGTH ERROR' WILL OCCUR. IF OHE ARGUMENT IS A VECTOR WHILE THE OTHER ARGUMENT IS A MATRIX.

THE RESULT WILL BE A 'RANK ERROR'.

THE SYMBOL & (ALT 4) IS USED FOR THE MONADIC GRADE UP FUNCTION.

IT TAKES A NUMERIC VECTOR ARGUMENT AND RETURNS A VECTOR OF THE

INDEXES OF THE ELEMENTS IN ORDER FROM SMALLEST TO LARGEST.

IN OTHER WORDS. THE FIRST ELEMENT IN THE RESPONSE IS THE INDEX

IN OTHER WORDS, THE FIRST ELEMENT IN THE RESPONSE IS THE INDEX

OF THE SMALLEST ELEMENT IN THE IMPUT. THE LAST ELEMENT IN THE

RESPONSE IS THE INDEX OF THE LARGEST ELEMENT IN THE INPUT.

EQUAL VALUES WILL BE GRADED IN ORDER FROM LEFT TO RIGHT.

FOR EXAMPLE:  $44863 \Rightarrow 4132$ BECAUSE THE FOURTH ELEMENT OF THE INPUT (3) IS THE SMALLEST, ETC.

THIS CAN BE USED TO SORT A VECTOR BY COMBINING WITH INDEX BRACKETS:

IF V = 14863 THEN  $V[4V] \Rightarrow 3468$ 

on the other hand, \$40\$ will produce a vector of the position numbers (rank order) corresponding to the input vector. For example: \$44.8.6.3 => 2.4.3.1 since 4 is the second smallest element, 8 is the fourth smallest, etc.

THE SYMBOL # (ALT 3) IS USED FOR THE MONADIC GRADE DOWN FUNCTION. IT TAKES A NUMERIC VECTOR ARGUMENT AND RETURNS A VECTOR OF THE INDEXES OF THE ELEMENTS IN ORDER FROM LARGEST TO SMALLEST. IN OTHER WORDS, THE FIRST ELEMENT IN THE RESPONSE IS THE INDEX

OF THE LARGEST ELEMENT IN THE INPUT. THE LAST ELEMENT IN THE RESPONSE IS THE INDEX OF THE SMALLEST ELEMENT IN THE INPUT. EQUAL VALUES WILL BE GRADED IN ORDER FROM LEFT TO RIGHT.

FOR EXAMPLE: **\* 4 8 6 3 =>** 2 3 1 4 RECAUSE THE SECOND ELEMENT OF THE INPUT (8) IS THE LARGEST, ETC. THIS CAN BE USED TO SORT A VECTOR BY COMBINING WITH INDEX BRACKETS: IF V => 4863 THEN V[#V] =>

- ON THE OTHER HAND, TTV WILL PRODUCE A VECTOR OF THE POSITION NUMBERS (IN REVERSE ORDER) CORRESPONDING TO THE INPUT VECTOR. FOR EXAMPLE: \*\* 4 8 6 3 => 3 1 2 4
- SINCE 4 IS THE THIRD LARGEST ELEMENT, 8 IS THE LARGEST, ETC.

THE SYMBOL ? (UPSHIFT G) IS USED FOR THE MONADIC ROLL FUNCTION. THIS IS A RANDOM NUMBER GENERATOR WHICH TAKES POSITIVE INTEGER ARGUMENTS AND RETURNS A RANDOMLY SELECTED INTEGER UP TO THE VALUE OF THE ARGUMENT.

THE LOWEST POSSIBLE VALUE WHICH CAN BE RETURNED IS NORMALLY (BY DEFAULT) 1.

USING ? WITH NEGATIVE ARGUMENTS OR ZERO PRODUCES A 'DOMAIN ERROR'.

FOR EXAMPLE: ?3 => EITHER 1, 2, OR 3, WITH EQUAL PROBABILITY

WHEN USED WITH VECTORS, ROLL RETURNS A VECTOR WITH EACH NUMBER
SELECTED RANDOMLY FROM THE RANGE DETERMININED BY THE CORRESPONDING
VALUE IN THE ARGUMENT.

## FOR EXAMPLE:

?3 3 3 => 1 1 2 OR 1 3 2 OR 3 3 2 OR 2 1 3 ETC. ?6 6 SIMULATES THE ROLLING OF A PAIR OF DICE.

ROLL CAN BE USED WITH MATRIXES OR HIGHER LEVEL ARRAYS IN A SIMILAR FASHION.

THE SYMBOL ? (UPSHIFT Q) IS USED FOR THE DYADIC DEAL FUNCTION.

THE RESULT OF THIS FUNCTION IS AN ARRAY OF RANDOM NUMBERS.

THE SHAPE OF THE ARRAY IS DETERMINED BY THE LEFT ARGUMENT.

THE NUMBERS ARE RANDOMLY SELECTED FROM THE POSITIVE INTEGERS

UP TO THE VALUE OF THE RIGHT ARGUMENT, WITH NO REPLACEMENT.

THAT IS, A NUMBER CANNOT APPEAR TWICE IN THE RESULT.

BOTH ARGUMENTS MUST BE A POSITIVE SINGLE NUMBER (SCALAR OR VECTOR OF LENGTH 1), AND THE RIGHT MUST EQUAL OR EXCEED THE LEFT.

USING HIGHER-ORDER ARGUMENTS PRODUCES A 'RANK ERROR'.

USING NEGATIVE ARGUMENTS OR ZERO PRODUCES A 'DOMAIN ERROR'.

FOR EXAMPLE: 272 => 1 2 OR 2 1 BUT NOT 2 2 OR 1 1 5752 SIMULATES THE DEAL OF A HAND OF CARDS.

EQUAL

180

AL EQUA

THE SYMBOL = (UPSHIFT 5) IS USED FOR THE DYADIC EQUALS FUNCTION.

THIS COMPARES NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK.

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS IDENTICAL

TO THE CORRESPONDING ELEMENT OF THE RIGHT ARGUMENT, AND 0 FOR

EACH ELEMENT THAT IS NOT.

FOR EXAMPLE: 2=2 => 1 2=4 => 0 (A'='8' => 0

TO COMPARE A SCALAR TO EACH ELEMENT OF A VECTOR, EXTER EITHER S=V OR V=5.

2=(2 3 4) => 1 0 0 (3 4 5)=5  $\Rightarrow$  0 0 1 V1=V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE: THINK!='THANK!  $\Rightarrow$  1 1 0 1 1

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH, YOU WILL SET A 'LENGTH ERROR'.

MATRIX COMPARISON IS DONE AS FOLLOWS:

SEM OR MES WILL COMPARE THE SCALAR S TO EACH ELEMENT OF THE MATRIX M, FOR EXAMPLE: IF M  $\approx > 1/2$  Then 3EM  $\Rightarrow > 0/0$  AND ME3  $\Rightarrow > 0/0$ 

4 1 0 1 0

**WOW** 

0 1 1

 $M1\pm M2$  WILL COMPARE THE MATRIX M1 TO THE MATRIX M2, ELEMENT BY ELEMENT. FOR EXAMPLE: IF M1 => HOW AND M2 => OOH THEH M1=M2 => O 1 O

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT. COMPARING A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

HOW

THE SYMBOL # (UPSHIFT 8) IS USED FOR THE DYADIC NOT EQUAL FUNCTION.

THIS COMPARES NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK.

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS NOT EQUAL

TO THE CORRESPONDING ELEMENT OF THE RIGHT ARGUMENT, AND 0 FOR

EACH ELEMENT THAT IS.

TO COMPARE A SCALAR TO EACH ELEMENT OF A VECTOR, ENTER EITHER S#V OR V#S.

2#(2 3 4) => 0 1 1 (3 4 5)#5 => 1 1 0

V1#V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

'THINK'#'THANK' => 0 0 1 0 0

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH,

YOU WILL GET A 'LENGTH ERROR'.

MATRIX COMPARISON IS DONE AS FOLLOWS:

S#M OR M#S WILL COMPARE THE SCALAR S TO EACH ELEMENT OF THE MATRIX M,

FOR EXAMPLE: IF M => 1 2 THEN 3#M => 1 1 AND M#3 => 1 1

3 4 0 1 0 1

M1#M2 WILL COMPARE THE MATRIX M1 TO THE MATRIX M2, ELEMENT BY ELEMENT.

FOR EXAMPLE: IF M1 => HOW AND M2 => OOH THEN M1#M2 => 1 0 1

HOW WOW 1 0 0

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT.

COMPARING A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL ( (UPSHIFT 3) IS USED FOR THE DYADIC LESS THAN FUNCTION,

THE STABOL ( (OPSHIFT 3) IS USED FOR THE BRADIC LESS THAN FUNCTION,

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS LESS  $\begin{tabular}{ll} \begin{tabular}{ll} \begin{tabular}{ll}$ 

FOR EXAMPLE:  $2(2 \Rightarrow) 0 = 2(4 \Rightarrow) 1$ 

TO COMPARE A SCALAR TO EACH ELEMENT OF A VECTOR, ENTER EITHER S(V OR V(S. ORDER IS IMPORTANT.

 $2((1\ 2\ 3)\ \Rightarrow\ 0\ 0\ 1$   $(3\ 4\ 5)(5\ \Rightarrow\ 1\ 1\ 0$ 

V1(V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT, FOR EXAMPLE:

 $(1\ 2\ 3) ((1\ 3\ 5) \Rightarrow 0\ 1\ 1$ 

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH, YOU WILL GET A 'LENGTH ERROR'.

MATRIX COMPARISON IS DONE AS FOLLOWS:

S(M OR M(S WILL COMPARE THE SCALAR S TO EACH ELEMENT OF THE MATRIX M.

FOR EXAMPLE: IF M  $\pm$ ) 1 2 THEN 3(M  $\pm$ ) 0 0 AND M(3  $\pm$ ) 1 1

3 4 0 1 0

M1(M2 WILL COMPARE THE MATRIX M1 TO THE MATRIX M2, ELEMENT BY ELEMENT,

FOR EXAMPLE: IF M1 => 1 4 AND M2 => 2 6 THEN M1(M2 => 1 1

4 7 5 3 1 0

 $m_1$  and  $m_2$  must be the same shape or a 'length error' will result. Comparing a vector to a matrix will result in a 'rank error'.

FUNCTION. THIS COMPARES NUMERIC ARGUMENTS OF ANY RANK.

THE SYMBOL  $\underline{\zeta}$  (UPSHIFT 4) IS USED FOR THE DYADIC LESS THAN OR EQUAL TO

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS LESS THAN OR EQUAL TO THE CORRESPONDING ELEMENT OF THE RIGHT ARGUMENT, AND 0 FOR EACH ELEMENT THAT IS NOT.

FOR EXAMPLE:  $252 \Rightarrow 1$   $254 \Rightarrow 1$   $2572 \Rightarrow 0$ 

TO COMPARE A SCALAR TO EACH ELEMENT OF A VECTOR, ENTER EITHER S(V OR V(S) ORDER IS IMPORTANT.  $24(1\ 2\ 3) \ => \ 0\ 1\ 1 \qquad (3\ 4\ 5)(5\ => \ 1\ 1\ 1$ 

V12V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

 $(1 \ 2 \ 3) \le (1 \ 3 \ 5) = > 1 \ 1 \ 1$ 

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH, YOU WILL GET A 'LENGTH ERROR'.

MATRIX COMPARISON IS DONE AS FOLLOWS:

SIM OR HIS WILL COMPARE THE SCALAR S TO EACH ELEMENT OF THE MATRIX M.

FOR EXAMPLE: IF M => 1 2 THEN 3(M => 0 0 AND M(3 => 1 1

3 4 1 1 1 0

 ${\tt M1\underline{C}M2}$  will compare the matrix  ${\tt M1}$  to the matrix  ${\tt M2}$ , element by element.

FOR EXAMPLE: IF M1 => 1 4 AND M2 => 2 6 THEN M1(M2 => 1 1

4 7 5 3 1 (

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT. COMPARING A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL 2 (UPSHIFT 6) IS USED FOR THE DYADIC GREATER THAN OF EQUAL TO FUNCTION. THIS COMPARES NUMERIC ARGUMENTS OF ANY RANK.

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS GREATER THAN OR EQUAL TO THE CORRESPONDING ELEMENT OF THE RIGHT ARGUMENT,

FOR ENAMPLE: 212 => 1 214 => 0 2172 => 1

AND O FOR EACH ELEMENT THAT IS NOT.

TO COMPARE A SCALAR TO EACH ELEMENT OF A VECTOR,

ENTER EITHER S2V OR V2S. ORDER IS IMPORTANT.

22(1 2 3) => 1 1 0 (3 4 5)25 => 0 0 1

V12V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

(1 2 3)2(1 3 5) => 1 0 0

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH,

YOU WILL GET A 'LENGTH ERROR'.

MATRIX COMPARISON IS DONE AS FOLLOWS:

S\_M OR M\_S WILL COMPARE THE SCALAR S TO EACH ELEMENT OF THE MATRIX M,

FOR EXAMPLE: IF M => 1 2 THEN 3\_M => 1 1 AND M\_S => 0 0

3 4 1 0 1 1

M1\_M2\_WILL\_COMPARE THE MATRIX M1 TO THE MATRIX M2, ELEMENT BY ELEMENT.

FOR EXAMPLE: IF M1 => 1 4 AND M2 => 2 6 THEN M1\_M2 => 0 0

4 7 5 3 0 1

M1\_AND\_M2\_MUST\_BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT.

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

COMPARING A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

......

THE SYMBOL > (UPSHIFT 7) IS USED FOR THE DYADIC GREATER THAN FUNCTION, THIS COMPARES PUMERIC ARGUMENTS OF ANY RANK.

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS GREATER THAN THE CORRESPONDING ELEMENT OF THE RIGHT ARGUMENT, AND 0 FOR EACH ELEMENT THAT IS NOT.

FOR EXAMPLE:  $2/2 \Rightarrow 0$   $4/2 \Rightarrow 1$ 

TO COMPARE A SCALAR TO EACH ELEMENT OF A VECTOR, ENTER EITHER S/V OR V/S. ORDER IS IMPORTANT.

2(123) = 100 (345)5 = 000

V1) V2 WILL COMPARE TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

 $(1 \ 2 \ 3))(1 \ 3 \ 5) \Rightarrow 0 \ 0 \ 0$ 

IF THE TWO VECTORS BEING COMPARED ARE NOT THE SAME LENGTH, YOU WILL GET A 'LENGTH ERROR'.

MATRIM COMPARISON IS DONE AS FOLLOWS:

Sym or Mys will compare the scalar S to each element of the Matrix M.

FOR EXAMPLE: IF M => 1 2 THEN 3>M => 1 1 AND M>3 => 0 0

14 00 01

 ${\tt M1}{\tt M2}$  WILL COMPARE THE MATRIX  ${\tt M1}$  TO THE MATRIX  ${\tt M2},$  ELEMENT BY ELEMENT.

FOR EXAMPLE; IF M1 => 1 4 AND M2 => 2 6 THEN M1>M2 => 0 0

4 7 1 3

1 1

M1 AND M2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT, COMPARING A VECTOR TO A MATRIX WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL & (UPSHIFT T) IS USED FOR THE MONADIC NOT FUNCTION.

IT TAKES AN ARGUMENT OF ANY RANK WHICH CONSISTS ONLY OF 1'S AND 0'S,
AND RETURNS THE LOGICAL INVERSE. THAT IS, 1'S ARE CHANGED TO 0'S
AND 0'S ARE CHANGED TO 1'S.

FOR EXAMPLE: #1 0 0 1 => 0 1 1 0

AND

AND

192

THE SYMBOL A (UPSHIFT ()) IS USED FOR THE DYADIC AND FUNCTION.

IT TAKES ARGUMENTS OF ANY RANK WHICH CONSIST ONLY OF 1'S AND 0'S.

THIS FUNCTION RETURNS 1 WHERE BOTH ARGUMENTS ARE 1, AND 0 OTHERWISE.

THE ORDER OF THE ARGUMENTS IS NOT IMPORTANT, BUT ENTERING AN ARGUMENT WHICH IS NOT 1 OR 0 WILL PRODUCE A 'DOMAIN ERROR'.

FOR EXAMPLE: 1A1 => 1 1A0 => 0 0A0 => 0

TO COMPARE A SCALAR TO EACH ELEMENT OF AN ARRAY, ENTER EITHER SAA OR AAS. FOR EXAMPLE, IF V=0 2 T3 0  $1^{(XY)}=0$  1 0 0  $(Y=2) \land Y[1]=2=0$  1 0 0  $41^{(A2)}$  WILL COMPARE TWO ARRAYS ELEMENT BY ELEMENT, FOR EXAMPLE:

 $(7)^{-3}$ )  $\wedge$  (7(2) => 0.01IF M1 => 1.0 AND M2 => 1.1 THEN M1 $\wedge$ M2 => 1.0 1.0 0.0 0.0

A1 AND A2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT, COMPARING TWO ARRAYS OF DIFFERENT RANK, FOR EXAMPLE A VECTOR AND A MATRIX, WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL & (ALT ()) IS USED FOR THE DYADIC NOT AND FUNCTION.

IT TAKES ARGUMENTS OF ANY RANK WHICH CONSIST ONLY OF 1'S AND 0'S.

THIS FUNCTION RETURNS 1 WHERE ONE OR NEITHER OF THE ARGUMENTS ARE 1,

AND () OTHERWISE (WHERE BOTH ARE 1).

THE ORDER OF THE ARGUMENTS IS NOT IMPORTANT, BUT ENTERING AN ARGUMENT WHICH IS NOT 1 OR 3 WILL PRODUCE A 'DOMAIN ERROR'.

FOR EXAMPLE: 141 => 0 140 => 1 040 => 1

A1 AND A2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT.

COMPARING TWO ARRAYS OF DIFFERENT RANK, FOR EXAMPLE A VECTOR AND A

MATRIX, WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL v (UPSHIFT 9) IS USED FOR THE DYADIC OR FUNCTION,

IT TAKES ARGUMENTS OF ANY RANK WHICH CONSIST ONLY OF 1'S AND 0'S.

THIS FUNCTION RETURNS 1 WHERE ONE OR BOTH ARGUMENTS ARE 1,

AND () OTHERWISE (WHERE BOTH ARE ()).

THE ORDER OF THE ARGUMENTS IS NOT IMPORTANT, BUT ENTERING AN ARGUMENT WHICH IS NOT 1 OR 0 WILL PRODUCE A 'DOMAIN ERROR'.

FOR EXAMPLE:  $1 \lor 1 \Rightarrow 1 \qquad 1 \lor 0 \Rightarrow 1 \qquad 0 \lor 0 \Rightarrow 0$ 

TO COMPARE A SCALAR TO EACH ELEMENT OF AN ARRAY,

ENTER EITHER SVA OR AVS. FOR EXAMPLE, IF V => 2 T3 0

1v(xv) = 111 (v=2) v V[1]=3 => 100

A1VA2 WILL COMPARE TWO ARRAYS ELEMENT BY ELEMENT. FOR EXAMPLE:

 $(\vee)^{-3}) \vee (\vee(2) =) 1 1 1$ 

IF M1 => 1 0 AND M2 => 1 1 THEN M1 $\vee$ M2 => 1 1

1 0 0 0 1 0

A1 AND A2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT, COMPARING TWO ARRAYS OF DIFFERENT RANK, FOR EXAMPLE A VECTOR AND A MATRIX, WILL RESULT IN A 'RANK ERROR'.

HOR

HOR

THE SYMBOL \* (ALT 9) IS USED FOR THE DYADIC NOR FUNCTION.

IT TAKES ARGUMENTS OF ANY RANK WHICH CONSIST ONLY OF 1'S AND 0'S.

THIS FUNCTION RETURNS 1 WHERE NEITHER OF THE ARGUMENTS ARE 1,

AND 0 OTHERWISE.

THE ORDER OF THE ARGUMENTS IS NOT IMPORTANT, BUT ENTERING AN ARGUMENT WHICH IS NOT 1 OR 0 WILL PRODUCE A 'DOMAIN ERROR'.

FOR EXAMPLE: 141 => 0 140 => 0 040 => 1

A1 AND A2 MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL RESULT.

COMPARING TWO ARRAYS OF DIFFERENT RANK, FOR EXAMPLE A VECTOR AND A

MATRIX, WILL RESULT IN A 'RANK ERROR'.

THE SYMBOL & (UPSHIFT E) IS USED FOR THE DYADIC MEMBER OF FUNCTION.

THIS COMPARES NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK.

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS FOUND

ANYWHERE IN THE RIGHT ARGUMENT, AND 0 FOR EVERY ELEMENT

THAT IS NOT.

WITH TWO SCALAR ARGUMENTS,  $\epsilon$  IS EQUIVALENT TO  $\pm$  . FOR EXAMPLE:  $2\epsilon 2$   $\pm 2$  1  $2\epsilon 4$   $\pm 2$  0 'A' $\epsilon$ 'B'  $\pm 2$  0

TO DETERMINE IF A SCALAR IS A MEMBER OF AN ARRAY, ENTER SEA.  $2\epsilon(2\ 3\ 4) = ) \ 1 \qquad \ \ 'A^*\epsilon' ABC' = ) \ 1$  ENTERING AES WILL PRODUCE THE SAME RESULT AS A=S.

 ${\sf A16A2}$  WILL TAKE EACH ELEMENT OF THE LEFT ARRAY AND DETERMINE IF IT IS CONTAINED IN THE RIGHT ARRAY.

FOR EXAMPLE: 'WHICH 1'&'0123456789' => 0 0 0 0 0 0 1

IF A1 => 1 22 14 AND A2 => 1 2 3

38 5 2

THEM A1:A2 => 1 0 0 AND A2:A1 => 1 1 0 0 0 1

THE RESULT OF A1:A2 HAS THE SAME SHAPE AS A1.

THE SYMBOL (ALT 5) IS USED FOR THE MONADIC REVERSE FUNCTION.

IT TAKES NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK.

IT RETURNS ALL THE ELEMENTS OF THE ARGUMENT IN THE SAME SHAPE,

BUT IN A DIFFERENT ORDER, AS FOLLOWS.

USING & WITH A SCALAR SIMPLY RETURNS THE SCALAR.

USING  $\phi$  with a vector returns the vector in reverse order.

FOR EXAMPLE: \$2 3 5 => 5 3 2 \*\*STOF\* => POTS

WHEN USED WITH A MATRIX, & TAKES THE COLUMNS AS UNITS AND REVERSES THEM. THE FIRST COLUMN RECOMES THE LAST COLUMN, AND SO ON.

BRACKETS FOLLOWING THE @ (OR THE @) SYMBOL.

- AFL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE COLUMNS, SINCE COLUMNS ARE THE SECOND OF TWO DIMENSIONS OF A MATRIX, THIS MEANS THAT THE SYMBOL & WORKS 'OVER' THE LAST DIMENSION, TO REVERSE OVER THE FIRST DIMENSION (E.G. ROWS OF A MATRIX), USE THE SYMBOL & (ALT 7), IN PLACE OF &.
- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS,

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND

  COLUMNS, & WILL REVERSE OVER THE COLUMNS, & OVER THE PAGES,

  TO REVERSE OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN
- FOR EXAMPLE, TO REVERSE OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA, ENTER @[2]AA OR @[2]AA, TO REVERSE OVER THE PAGES, ENTER @AA OR @[1]AA, TO REVERSE OVER THE COLUMNS, ENTER @AA OR @[3]AA.

THE SYMBOL 8 (ALT 7) IS USED FOR THE MONADIC REVERSE FUNCTION.

IT TAKES NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK.

IT RETURNS ALL THE ELEMENTS OF THE ARGUMENT IN THE SAME SHAPE,

USING & WITH A SCALAR SIMPLY RETURNS THE SCALAR.

BUT IN A DIFFERENT ORDER, AS FOLLOWS.

USING 8 WITH A VECTOR RETURNS THE VECTOR IN REVERSE ORDER. FOR EXAMPLE: 82 3 5  $\Rightarrow$  5 3 2

e'STOF' => FOTS

WHEN USED WITH A MATRIX,  $\theta$  TAKES THE ROWS AS UNITS AND REVERSES THEM. THE FIRST ROW BECOMES THE LAST ROW, AND SO ON.

FOR EXAMPLE, IF M => 1 2 3 THEN 9M => 7 8 9

456

456

789

BRACKETS FOLLOWING THE 8 (OR THE 8) SYMBOL.

1 2 3

APL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE ROWS, SINCE ROWS ARE THE FIRST OF TWO DIMENSIONS OF A MATRIX, THIS MEANS THAT THE SYMBOL & WORKS 'OVER' THE FIRST DIMENSION, TO REVERSE OVER THE LAST DIMENSION (E.G. COLUMNS OF A MATRIX), USE THE SYMBOL & (ALT 5), IN PLACE OF &.

- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS, FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS, # WILL REVERSE OVER THE COLUMNS, 9 OVER THE PAGES.

  TO REVERSE OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN
- FOR EXAMPLE, TO REVERSE OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA, ENTER 8[2]AA OR \$[2]AA. TO REVERSE OVER THE PAGES, ENTER 8AA OR \$[1]AA. TO REVERSE OVER THE COLUMNS, ENTER 8AA OR 8[3]AA.

THE SYMBOL & (ALT 5) IS USED FOR THE DYADIC ROTATE FUNCTION,

THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

THE LEFT ARGUMENT MUST RE AN INTEGER SCALAR OR ARRAY.

IT RETURNS ALL THE ELEMENTS OF THE RIGHT ARGUMENT IN THE SAME SHAPE,

BUT IN A DIFFERENT ORDER, AS FOLLOWS.

USING & WITH TWO SCALAR ARGUMENTS SIMPLY RETURNS THE RIGHT ARGUMENT.

A VECTOR RIGHT ARGUMENT REQUIRES A SCALAR LEFT ARGUMENT, EACH ELEMENT OF THE RIGHT ARGUMENT IS MOVED TO THE LEFT BY THE MUMBER OF PLACES INDICATED IN THE LEFT ARGUMENT,

FOR EXAMPLE: 202 3 5 => 5 2 3 30'ROTATE' => ATEROT

WHEN USED WITH A MATRIX, & TAKES EITHER A SCALAR LEFT ARGUMENT OF A VECTOR WITH AS MANY ELEMENTS AS THERE ARE ROWS IN THE MATRIX.

SOM TAKES THE COLUMNS AS UNITS AND MOVES EACH COLUMN TO THE LEFT BY THE NUMBER OF SPACES INDICATED BY THE SCALAR.

FOR EXAMPLE: IF M => 1 2 3 THEN 20M => 3 1 2 4 5 6 5 4 5 9 7 8 9

VOM TAKES EACH ROW INDIVIDUALLY AND MOVES THE ELEMENTS TO THE LEFT BY THE NUMBER OF SPACES INDICATED BY THE CORRESPONDING ELEMENT OF THE LEFT ARGUMENT. FOR EXAMPLE:

2 3 10M =) 3 1 2 THE FIRST ROW IS MOVED 2 SPACES LEFT

4 5 6 THE SECOND ROW IS ROTATED 3 SPACES

3 9 7 THE THIRD ROW IS ROTATED ONCE

EACH ELEMENT IS IN THE SAME ROW BUT A DIFFERENT COLUMN, SO APL

USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE COLUMNS.

SINCE COLUMNS ARE THE SECOND OF TWO DIMENSIONS OF A MATRIX,

THIS MEANS THAT THE SYMBOL & WORKS 'OVER' THE LAST DIMENSION.

TO ROTATE OVER THE FIRST DIMENSION (E.G. ROWS OF A MATRIX), USE THE

SYMBOL a (ALT 7), IN PLACE OF &.

- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS.

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS, & WILL ROTATE OVER THE COLUMNS, & OVER THE PAGES.
- TO ROTATE OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN BRACKETS FOLLOWING THE  $\varphi$  (OR THE  $\theta$ ) SYMBOL.
- THE LEFT ARGUMENT MUST HAVE THE SAME SHAPE AS THE RIGHT ARGUMENT OMITTING THE DIMENSION BEING ROTATED OVER, OR IT MAY BE A SCALAR.
- FOR EXAMPLE, TO ROTATE OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA WHERE  $\rho$ AA => 2 3 4, ENTER EITHER S $\phi$ [2]AA OR M $\phi$ [2]AA WHERE  $\rho$ M => 2 4. TO ROTATE OVER THE PAGES, ENTER S $\phi$ AA OR M $\phi$ AA WHERE  $\rho$ M => 3 4. TO ROTATE OVER THE COLUMNS, ENTER S $\phi$ AA OR M $\phi$ AA OR S $\phi$ [3]AA OR H $\phi$ [3]AA WHERE  $\rho$ M => 2 3.

THE SYMBOL @ (ALT 7) IS USED FOR THE DYADIC ROTATE FUNCTION.

THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

THE LEFT ARGUMENT MUST BE AN INTEGER SCALAR OR ARRAY.

IT RETURNS ALL THE ELEMENTS OF THE RIGHT ARGUMENT IN THE SAME SHAPE,

BUT IN A DIFFERENT ORDER, AS FOLLOWS.

USING @ WITH TWO SCALAR ARGUMENTS SIMPLY RETURNS THE RIGHT ARGUMENT.

A VECTOR RIGHT ARGUMENT REQUIRES A SCALAR LEFT ARGUMENT.

EACH ELEMENT OF THE RIGHT ARGUMENT IS MOVED TO THE LEFT BY THE NUMBER

OF PLACES INDICATED IN THE LEFT ARGUMENT.

FOR EXAMPLE: 202 3 5 => 5 2 3 30'ROTATE' => ATEROT

WHEN USED WITH A MATRIX, @ TAKES EITHER A SCALAR LEFT ARGUMENT OR A VECTOR WITH AS MANY ELEMENTS AS THERE ARE COLUMNS IN THE MATRIX.

SOM TAKES THE ROWS AS UMITS AND MOVES EACH ROW UP BY THE NUMBER SPACES INDICATED BY THE SCALAR.

FOR EXAMPLE: IF M => 1 2 3 THEM 20M => 7 8 9 4 5 6 1 2 3 7 8 9 4 5 6

VOM TAKES EACH COLUMN INDIVIDUALLY AND MOVES THE ELEMENTS UP BY
THE NUMBER OF SPACES INDICATED BY THE CORRESPONDING ELEMENT OF THE
LEFT ARGUMENT. FOR EXAMPLE:

2 3 19M => 7 2.6 THE FIRST COLUMN IS MOVED 2 SPACES UP
1 5 9 THE SECOND COLUMN IS ROTATED 3 SPACES
4 8 3 THE THIRD COLUMN IS ROTATED ONCE

EACH ELEMENT IS IN THE SAME COLUMN BUT A DIFFERENT ROW, SO AFL

USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE ROWS,

SINCE ROWS ARE THE FIRST OF TWO DIMENSIONS OF A MATRIX,

THIS MEANS THAT THE SYMBOL & WORKS 'OVER' THE FIRST DIMENSION,

TO ROTATE OVER THE LAST DIMENSION (E.G. COLUMNS OF A MATRIX), USE THE

SYMBOL . (ALT 5), IN PLACE OF 8.

- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS.

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS, & WILL ROTATE OVER THE COLUMNS, @ OVER THE PAGES.
- TO ROTATE OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN BRACKETS FOLLOWING THE @ (OR THE @) SYMBOL.
- THE LEFT ARGUMENT MUST HAVE THE SAME SHAPE AS THE RIGHT ARGUMENT OMITTING THE DIMENSION BEING ROTATED OVER, OR IT MAY BE A SCALAR.
- FOR EXAMPLE, TO ROTATE OVER THE ROWS OF A THREE-DIMENSIGNAL ARRAY CALLED AA WHERE  $_{\rm FAA}$  = , 2 3 4, ENTER EITHER So[2]AA OR Mo[2]AA WHERE  $_{\rm FM}$  = ; 2 4. TO ROTATE OVER THE PAGES, ENTER SoAA OR MoAA OR So[1]AA OR Mo[1]AA WHERE  $_{\rm FM}$  = ; 3 4. TO ROTATE OVER THE COLUMNS, ENTER SOAA OR MoAA OR So[3]AA OR Mo[3]AA WHERE  $_{\rm FM}$  = ; 2 3.

THE SYMBOL & (ALT &) IS USED FOR THE MONADIC TRANSPOSE FUNCTION.

IT TAKES NUMBERIC OR CHARACTER ARGUMENTS OF ANY RANK.

IT RETURNS ALL THE ELEMENTS OF THE ARGUMENT IN A DIFFERENT SHAPE AND ORDER, AS FOLLOWS.

USING & WITH A SCALAR OR VECTOR SIMPLY RETURNS THE ARGUMENT.

WHEN USED WITH A MATRIX, & PERFORMS MATRIX TRANSPOSITION: THE ROWS BECOME COLUMNS AND THE COLUMNS BECOME ROWS.

FOR EXAMPLE, IF M => 1 2 3 THEN QM => 1 4 7
4 5 6 2 5 8
7 8 9 3 6 9

WHEN USED WITH HIGHER-DIMENSIONAL ARRAYS, TRANSPOSE REVERSES THE ORDER OF THE DIMENSIONS.

FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS, THE PAGES WILL BECOME ROWS AND THE ROWS PAGES.

THAT IS, THE ELEMENT IN THE FIRST PAGE, SECOND ROW, THIRD COLUMN WILL BE TRANSPOSED TO THE THIRD PAGE, SECOND ROW, FIRST COLUMN.

IF ARRAY[1;2;3;4] => 7 THEN (@ARRAY)[4;3;2;1] => 7

THE SHAPE OF THE RESULT WILL ALWAYS BE THE REVERSE OF THE SHAPE OF THE ARGUMENT. IF PARRAY => 3 2 7 THEN P@ARRAY => 7 2 3

- THE SYMBOL & (ALT 6) IS USED FOR THE DYADIC TRANSPOSE FUNCTION.
- THE SYMBOL & (ALT 6) IS USED FOR THE DYADIC TRANSPOSE FUNCTION.

  THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

  THE LEFT ARGUMENT MUST BE A POSITIVE INTEGER SCALAR OR VECTOR.
- IT RETURNS ALL THE ELEMENTS OF THE RIGHT ARGUMENT IN A DIFFERENT SHAPE AND ORDER, AS FOLLOWS.
- USING & WITH A SCALAR RIGHT ARGUMENT RETURNS A 'LENGTH ERROR' UNLESS

  THE LEFT ARGUMENT IS AN EMPTY VECTOR. THEN IT RETURNS THE SCALAR.
- 16V RETURNS THE VECTOR V. ANY OTHER SCALAR LEFT ARGUMENT USED WITH A VECTOR RIGHT ARGUMENT PRODUCES A 'DOMAIN ERROR', ANY OTHER RANK LEFT ARGUMENT RESULTS IN A 'LENGTH ERROR'.
- WITH A MATRIX RIGHT ARGUMENT, THE LEFT ARGUMENT MUST BE A VECTOR: EITHER (1 2) OR (2 1). (2 1)&M PRODUCES THE TRANSPOSE OF M; THE COLUMNS (THE SECOND DIMENSION) BECOME THE ROW (THE FIRST DIMENSION). (1 2)& M  $\Rightarrow$  M
- WITH A RIGHT ARGUMENT OF RANK R, THE LEFT ARGUMENT MUST CONTAIN ALL THE INTEGERS FROM 1 TO R, IN ANY ORDER.
- TRANSPOSE WILL TAKE THE DIMENSIONS OF THE RIGHT ARGUMENT AND PUT THEM

  IN THE ORDER SPECIFIED BY THE LEFT ARGUMENT.
- FOR EXAMPLE, IF pA=2-2-3-4 THEN (3-1-2) baselle put the third dimension first (columns become pages), the first dimension second (pages become rows), and the second dimension third (rows become columns). So <math>p(3-1-2) baselle a=2-4-2 3.
- IH OTHER WORDS, THE ELEMENT IN THE SECOND COLUMN, THIRD ROW, FIRST PAGE WILL BE TRANSPOSED TO THE SECOND PAGE, THIRD COLUMN, FIRST ROW, AND SO ON, IF A[1 3 2] => 8 THEH ((3 1 2) $\oplus$ A)[2 13] => 8.

TAKE

THE STMBOL A (UPSHIFT Y) IS USED FOR THE DYADIC TAKE FUNCTION.

THE LEFT ARGUMENT MUST BE AN INTEGER SCALAR OR VECTOR.

THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

TAKE RETURNS SELECTED ELEMENTS OF THE RIGHT ARGUMENT AS FOLLOWS:

- WHEN THE RIGHT ARGUMENT IS A SCALAR, THE LEFT ARGUMENT CAN BE A SCALAR OR A VECTOR OF ANY LENGTH.
- THE RESULT OF LAR HAS A SHAPE EXACTLY EQUAL TO L. R WILL BE THE FIRST ELEMENT IF L IS POSITIVE, AND THE LAST ELEMENT IF L IS NEGATIVE. THE OTHER ELEMENTS WILL BE O IF R IS NUMERIC, BLANK IF R IS CHARACTER.
- IF THE RIGHT ARGUMENT IS A VECTOR, THE LEFT ARGUMENT MUST BE A SCALAR OR A 'RANK ERROR' WILL RESULT,
- SAV WILL RETURN THE FIRST S ELEMENTS OF  $V_{\bullet}$  IF S IS POSITIVE, OR THE LAST S ELEMENTS OF  $V_{\bullet}$  IF S IS NEGATIVE.
- IF 3 EXCEEDS THE LENGTH OF V, THE RESULT WILL BE PADDED WITH 0'S, OR SLANKS, ON THE RIGHT IF S IS POSITIVE, ON THE LEFT IF S IS NEGATIVE.
- WHEN THE RIGHT ARGUMENT IS A MATRIX OR HIGHER LEVEL ARRAY, THE LEFT ARGUMENT MUST BE A VECTOR WITH AS MANY ELEMENTS AS THERE ARE DIMENSIONS IN THE RIGHT ARGUMENT, OR A 'LENGTH ERROR' RESULTS.
- FOR EXAMPLE: IF M => 987 T1 2+M => 65 2 4+M => 987 0 654
- THE FIRST ELEMENT OF THE VECTOR DETERMINES WHICH ROWS ARE TAKEN,
  AND THE SECOND ELEMENT DETERMINES WHICH COLUMNS ARE TAKEN,
  THE RESULT WILL BE PADDED WITH O'S OR BLANKS AS ABOVE.

- FOR HIGHER LEVEL ARRAYS, EACH ELEMENT OF THE LEFT ARGUMENT WILL TAKE ELEMENTS FROM THE CORRESPONDING DIMENSION.
- FOR EXAMPLE, IF pA=0 6 5 4; (2 73 1) AM WILL RETURN THE FIRST COLUMN OF THE LAST THREE ROWS OF THE FIRST TWO PAGES.
- THE RESULT OF TAKE WILL ALWAYS HAVE A SHAPE EXACTLY EQUAL TO THE ABSOLUTE VALUE OF THE LEFT ARGUMENT.
- IF THERE IS A ZERO (O) ANYWHERE IN THE LEFT ARGUMENT, THE ANSWER WILL BE AN EMPTY ARRAY WITH THE APPROPRIATE SHAPE.

THE SYMBOL & (UPSHIFT U) IS USED FOR THE DYADIC DROP FUNCTION.

THE LEFT ARGUMENT MUST BE AN INTEGER SCALAR OR VECTOR.

THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

DROP RETURNS SELECTED ELEMENTS OF THE RIGHT ARGUMENT AS FOLLOWS:

- WHEN THE RIGHT ARGUMENT IS A SCALAR, THE LEFT ARGUMENT CAN BE A SCALAR OR A VECTOR OF ANY LENGTH.
- IF ALL ELEMENTS OF THE LEFT ARGUMENT EQUAL (), THE RESULT OF LUS WILL BE AN ARRAY CONTAINING THE RIGHT ARGUMENT; OTHERWISE IT WILL BE AN EMPTY ARRAY. THIS ARRAY HAS AS MANY DIMENSIONS AS THE LEFT ARGUMENT HAS ELEMENTS AND EACH DIMENSION IS OF LENGTH 1.
- FOR EXAMPLE:  $1 \downarrow 4$  => (EMPTY)  $f1 \downarrow 4$  => 1  $0 \downarrow 'A'$  => A  $2 \downarrow 4 \downarrow 4 \downarrow 2$  => (EMPTY)  $f(2 \downarrow 4 \downarrow 6) \downarrow 2$  => 1 1 1 0 0 0  $\downarrow 3$  => 3
- IF THE RIGHT ARGUMENT IS A VECTOR, THE LEFT ARGUMENT MUST BE A SCALAR OR A "PANK ERROR" WILL RESULT.
- SAV WILL RETURN V OMITTING THE FIRST S ELEMENTS, IF S IS POSITIVE, OR THE LAST S ELEMENTS, IF S IS NEGATIVE.
- IF S EXCEEDS THE LENGTH OF V, THE RESULT WILL BE AN EMPTY VECTOR.
- WHEN THE RIGHT ARGUMENT IS A MATRIX OR HIGHER LEVEL ARRAY, THE LEFT

  ARGUMENT MUST BE A VECTOR WITH AS MANY ELEMENTS AS THERE ARE

  DIMENSIONS IN THE RIGHT ARGUMENT, OR A 'LENGTH ERROR' RESULTS.
- FOR EXAMPLE: IF M => 9 8 7 1  $^{-1}$   $^{+}$ M => 6 5 0 2  $^{+}$ M => 7 6 5 4
- THE FIRST ELEMENT OF THE VECTOR DETERMINES WHICH ROWS ARE DROPPED, AND THE SECOND ELEMENT DETERMINES WHICH COLUMNS ARE DROPPED.

FOR HIGHER LEVEL ARRAYS, EACH ELEMENT OF THE LEFT ARGUMENT WILL

DROP ELEMENTS FROM THE CORRESPONDING DIMENSION.

- FOR EXAMPLE, IF pa=0 6 5 4; (2 T3 1)  $\psi a$  WILL RETURN THE LAST THREE COLUMNS OF THE FIRST TWO ROWS OF THE LAST FOUR PAGES.
- THE RESULT OF DROP WILL ALWAYS HAVE A SHAFE EXACTLY EQUAL TO THE SHAPE OF THE RIGHT ARGUMENT MINUS THE ABSOLUTE VALUE OF THE LEFT ARGUMENT, EXCEPT AS FOLLOWS:
- IF ANY ELEMENT OF THE LEFT ARGUMENT EXCEEDS THE LENGTH OF THE CORRESPONDING DIMENSION IN THE RIGHT ARGUMENT, THE RESULT WILL BE AN EMPTY ARRAY OF THE APPROPRIATE SHAPE.
- IN THE ABOVE EXAMPLE:  $f(2 \ \ 3 \ 1) \psi A = 0.4 \ 2 \ 3$   $f(3 \ 4 \ 5) \psi A = 0.3 \ 1 \ 0.3 \ 4 \ 5 \psi A = 0.4$  (EMPTY)

THE SYMBOL / IS USED FOR THE DYADIC COMPRESS FUNCTION.

THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

THE LEFT ARGUMENT MUST BE 1,0, OR A VECTOR OF 1'S AND 0'S.

COMPRESS RETURNS SELECTED ELEMENTS OF THE RIGHT ARGUMENT, AS FOLLOWS:

1/A WILL RETURN THE RIGHT ARGUMENT, WHILE G/A RETURNS AN EMPTY ARRAY.

v1/v2 will return the elements of v2 that correspond to 1's in v1. FOR EXAMPLE: 1 0 1/1 2 3  $\Rightarrow$  1 3 1 1 0 1/'HALT'  $\Rightarrow$  HAT TWO VECTOR ARGUMENTS MUST HAVE THE SAME NUMBER OF ELEMENTS OR A 'LENGTH EFROR' WILL RESULT.

V/H TAKES THE COLUMNS AS UNITS AND RETURNS THE COLUMNS IN M WHICH CORRESPOND TO THE 1'S IN V. FOR EXAMPLE:

IF M => 1 2 3 THEN 1 0 1/M => 1 3 4 5 6 4 6 7 8 7 7 9

- AFL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE COLUMNS, SINCE COLUMNS ARE THE SECOND OF TWO DIMENSIONS OF A MATRIX, THIS MEANS THAT THE SYMBOL / WORKS 'OVER' THE LAST DIMENSION, TO COMPRESS OVER THE FIRST DIMENSION (E.G. ROWS OF A MATRIX), USE THE SYMBOL / (ALT /), IN PLACE OF /.
- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS.

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND COLUMNS, / WILL COMPRESS OVER THE COLUMNS, / OVER THE PAGES.

  TO COMPRESS OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN BRACKETS FOLLOWING THE / (OR THE /) SYMBOL.

  THE LEFT ARGUMENT MUST BE A SCALAR, OR A VECTOR WITH THE SAME NUMBER OF ELEMENTS AS THE DIMENSION BEING COMPRESSED OVER.

  FOR EXAMPLE, TO COMPRESS OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY

CALLED AA WHERE  $\rho$ AA => 2 3 4, ENTER S/[2]AA OR V/[2]AA OR S $\neq$ [2]AA OR V $\neq$ [2]AA WHERE  $\rho$ V => 3. TO COMPRESS OVER THE PAGES, ENTER S $\neq$ AA OR V $\neq$ AA OR S/[1]AA OR V/[1]AA WHERE  $\rho$ V => 2. TO COMPRESS OVER THE COLUMNS, ENTER S/AA OR V/AA OR S $\neq$ [3]AA OR V $\neq$ [3] AA WHERE  $\rho$ V => 4.

THE SYMBOL  $\neq$  (ALT /) IS USED FOR THE DYADIC COMPRESS FUNCTION, THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK. THE LEFT ARGUMENT MUST PE 1,0, OR A VECTOR OF 1'S AND 0'S.

194 WILL RETURN THE RIGHT ARGUMENT, WHILE 094 RETURNS AN EMPTY APPAI.

COMPRESS RETURNS SELECTED ELEMENTS OF THE RIGHT ARGUMENT, AS FOLLOWS:

 $v_{\#}M$  Takes the rows as units and returns the rows in M which correspond to the 1's in  $v_{*}$  for example:

IF M => 1 2 3 THEN 1 0 17M => 1 2 3 4 5 6 7 3 9

- APL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE ROWS.

  SINCE ROWS ARE THE FIRST OF TWO DIMENSIONS OF A MATRIX,

  THIS MEANS THAT THE SYMBOL / WORKS 'OVER' THE FIRST DIMENSION.

  TO COMPRESS OVER THE LAST DIMENSION (E.G. COLUMNS OF A MATRIX),

  USE THE SYMBOL / IN PLACE OF #.
- THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS,

  FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND

  COLUMNS, / WILL COMPRESS OVER THE COLUMNS, / OVER THE PAGES.

  TO COMPRESS OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN

  BRACKETS FOLLOWING THE / (OR THE /) SYMBOL.

  THE LEFT ARGUMENT MUST BE A SCALAR, OR A VECTOR WITH THE SAME

  HUMBER OF ELEMENTS AS THE DIMENSION BEING COMPRESSED OVER.

  FOR EXAMPLE, TO COMPRESS OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY

THE SYMBOL \ (UPSHIFT /) IS USED FOR THE DYADIC EXPAND FUNCTION.

THE RIGHT ARGUMENT CAM BE CHARACTER OR MUMERIC, OF ANY RANK.

THE LEFT ARGUMENT MUST BE A VECTOR OF 1'S AND 0'S.

IS NUMERIC, OR BLANKS IF IT IS CHARACTER, AS FOLLOWS:

EXPAND RETURNS THE RIGHT ARGUMENT, ADDING 0'S IF THE RIGHT ARGUMENT
IS NUMERIC, OR BLANKS IF IT IS CHARACTER, AS FOLLOWS:

V\S WILL RETURN A VECTOR CONSISTING OF THE SCALAR REPEATED AS MANY TIMES AS THERE ARE 1'S IN V.

FOR EXAMPLE: 1 0 1\3 => 3 3

IF THERE ARE NO 1'S IN V, V\S RETURNS AN EMPTY VECTOR.

V1/V2 WILL RETURN THE ELEMENTS OF V2, WITH 0'S OR BLANKS INSERTED TO CORRESPOND TO THE 0'S IN V1. FOR EXAMPLE:

1 1 0 1\1 2 3 => 1 2 0 3 1 0 1 0 1\'APL' => A F L

THE LEFT ARGUMENT MUST CONTAIN AS MANY 1'S AS THERE ARE ELEMENTS

IN THE RIGHT ARGUMENT OR A 'LENGTH ERROR' WILL RESULT.

V/M TAKES THE COLUMNS AS UNITS AND RETURNS THE A MATRIX WITH COLUMNS OF 0'S OR BLANKS INSERTED TO CORRESPOND TO THE 1'S IN V.

IF M => 1 2 3 THEN 1 0 1 0 1\M => 1 0 2 0 3 4 5 6 4 0 5 0 6 7 8 9 7 0 8 0 9

APL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE COLUMNS, SINCE COLUMNS ARE THE SECOND OF TWO DIMENSIONS OF A MATRIX,

THIS MEANS THAT THE SYMBOL \ WORKS 'OVER' THE LAST DIMENSION.

TO EXPAND OVER THE FIRST DIMENSION (E.G. ROWS OF A MATRIX), USE THE SYMBOL \ (ALT .), IN PLACE OF \.

THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DIMENSIONAL ARRAYS.

FOR EXAMP &, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND

- COLUMNS, \ WILL EXPAND OVER THE COLUMNS, \ OVER THE PAGES.
- TO EXPAND OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN REACKETS FOLLOWING THE  $\chi$  (OR THE  $\chi$ ) STMBOL.
- FOR EXAMPLE, TO EXPAND OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA WHERE  $\rho$ AA => 2 3 4, ENTER V\[2]AA OR V\[2]AA WHERE +/V => 3. TO EXPAND OVER THE PAGES, ENTER V\[\frac{1}{4}AA OR V\[1]AA WHERE +/V => 2. TO EXPAND OVER THE COLUMNS, ENTER V\[\frac{1}{4}AA OR V\[2]AA WHERE +/V => 4

THE SYMBOL & (ALT ,) IS USED FOR THE DYADIC EXPAND FUNCTION.

THE RIGHT ARGUMENT CAN BE CHARACTER OR NUMERIC, OF ANY RANK.

THE LEFT ARGUMENT MUST BE A VECTOR OF 1'S AND 0'S.

EXPAND RETURNS THE RIGHT ARGUMENT, ADDING 0'S IF THE RIGHT ARGUMENT IS NUMERIC, OR BLANKS IF IT IS CHARACTER, AS FOLLOWS:

VAS WILL RETURN A VECTOR CONSISTING OF THE SCALAR REPEATED AS MANY TIMES AS THERE ARE 1'S IN V.

FOR EXAMPLE: 1 0 143 => 3 3

IF THERE ARE NO 1'S IN V, VAS RETURNS AN EMPTY VECTOR.

V14V2 WILL RETURN THE ELEMENTS OF V2. WITH 0'S OR BLANKS INSERTED TO CORRESPOND TO THE 0'S IN V1. FOR EXAMPLE:

1 1 0 141 2 3 => 1 2 0 3 1 0 1 0 14'APL' => A P L

THE LEFT ARGUMENT MUST CONTAIN AS MANY 1'S AS THERE ARE ELEMENTS

IN THE RIGHT ARGUMENT OR A 'LENGTH ERROR' WILL RESULT.

VAM TAKES THE ROWS AS UNITS AND RETURNS THE MATRIX WITH ROWS OF  $0^{\circ}$ S or Blanks inserted to correspond to the  $1^{\circ}$ S in V.

IF M => 123 THEN 101 \ M => 123
456
000
456

APL USERS REFER TO THIS AS WORKING 'ACROSS' OR 'OVER' THE ROWS, SINCE ROWS ARE THE FIRST OF TWO DIMENSIONS OF A MATRIX, THIS MEANS THAT THE SYMBOL & WORKS 'OVER' THE FIRST DIMENSION, TO EXPAND OVER THE LAST DIMENSION (E.G. COLUMNS OF A MATRIX), USE THE SYMBOL \ (UPSHIFT /), IN PLACE OF \.

THIS IS IMPORTANT WHEN WORKING WITH HIGHER-DINENSIONAL ARRAYS,

FOR EXAMPLE, IN A THREE-DIMENSIONAL ARRAY OF PAGES, ROWS, AND

COLUMNS, \ WILL EXPAND OVER THE COLUMNS, \ OVER THE PAGES.

- TO EXPAND OVER ANY DIMENSION, YOU MAY SPECIFY THE DIMENSION IN BRACKETS FOLLOWING THE  $\chi$  (OR THE  $\chi$ ) SYMBOL.
- THE LEFT ARGUMENT MUST BE A VECTOR WITH THE SAME NUMBER OF 1'S AS THERE ARE ELEMENTS IN THE DIMENSION BEING EXPANDED OVER.
- FOR EXAMPLE, TO EXPAND OVER THE ROWS OF A THREE-DIMENSIONAL ARRAY CALLED AA WHERE  $\rho$ AA => 2 3 4, ENTER V\[2]AA OR V\[2]AA WHERE +/V => 3. TO EXPAND OVER THE PAGES, ENTER V\AA OR V\[1]AA WHERE +/V => 2. TO EXPAND OVER THE COLUMNS, ENTER V\AA OR V\[3]AA WHERE +/V => 4

THE STMBOL, FOLLOWED BY AN NUMBER IN BRACKETS IS USED FOR THE DYADIC LAMINATE FUNCTION, AN EXTENSION OF THE CATENATE FUNCTION.

THIS FUNCTION WILL COMBINE TWO CHARACTER OR NUMBERIC ARGUMENTS

OF ANY RANK (EXCEPT TWO SCALARS) INTO A SINGLE ARRAY.

VECTORS CAN BE EXTENDED BY LAMINATING S,[1]V OR V,[1]S OR V,[1]V.

THE NUMBER IN THE BRACKETS MUST BE 1 BECAUSE VECTOR HAVE ONLY

ONE DIMENSION. THIS WORKS EXACTLY LIKE CATENATE.

## NOW FOR SOMETHING REALLY TRICKY!

TO MAKE A TWO-ROW MATRIX OUT OF TWO VECTORS OF THE SAME LENGTH, ENTER V1,[.5]V2. ANY INDEX BETWEEN 0 AND 1 WILL DO.

- THIS CREATES A NEW DIMENSION PRECEDING THE FIRST DIMENSION OF THE ARGUMENTS. THE OTHER DIMENSION STAYS THE SAME LENGTH.
- TO MAKE A TWO-COLUMN MATRIX, ENTER V1,[1.5]V2 (ANY INDEX FROM 1 TO 2). NOW THE NEW DIMENSION COMES AFTER THE FIRST, WHICH IS THE SAME AS THE LENGTH OF THE ARGUMENTS.
- LAMINATING A SCALAR TO A MATRIX WILL RESULT IN A MATRIX WITH ONE MORE ROW (IF THE INDEX NUMBER IN BRACKETS IS 1) OR DNE MORE COLUMN (IF THE INDEX NUMBER IS 2) THAN THE ORIGINAL MATRIX.

  ALL ENTRIES IN THIS ROW OR COLUMN WILL HAVE THE VALUE OF THE SCALAR.

IF M => 1 2 THEN 5,[1]M => 5 5 AND M,[2]5  $\approx$ > 1 2 5 3 4 5

3 4

LAMINATING TWO MATRIXES WILL RESULT IN A MATRIX CONTAINING THE TWO ORIGINAL MATRIXES SIDE BY SIDE (INDEX 2) OR VERTICALLY (INDEX 1).

FOR EXAMPLE: IF H1 => 1 2 AND H2 => 5 6

3 4 7 8

THEN M1,[2]M2 => 1256 AND <math>M2,[1]M1 => 12

3 4 7 8

3 4

5 6

7 8

TO STACK THE MATRIXES BY CREATING A THIRD DIMENSION, ENTER M1,[.5]M2 (ANY INDEX BETWEEN 0 AND 1). YOU CAN ALSO CREATE A THIRD DIMENSION BY M1,[1.5]M2 OR M1,[2.5]M2. TRY IT.

VARIATIONS ON THIS THEME ARE ALMOST ENDLESS--EXPERIMENT;

IM EVERY CASE, THE NUMBER IN THE BRACKETS REFERS TO THE DIMENSION

WHERE THE 'SEAM' IS--THE DIMENSION THAT INCREASES IN LENGTH.

IF THIS IS A NEW DIMENSION, IT WILL ALWAYS RE LENGTH 2 IN THE RESULT.

THE OTHER DIMENSIONS MUST BE THE SAME LENGTH IN BOTH ARGUMENTS

(UNLESS ONE IS A SCALAR) OR A 'LENGTH ERROR' WILL RESULT.

THE SYMBOL B (ALT X) IS USED FOR THE MONADIC MATRIX INVERSE FUNCTION.

IT TAKES A NUMERIC SCALAR, VECTOR, OR MATRIX ARGUMENT, AND RETURNS

THE LEFT INVERSE. IN TERMS OF MATRIX ALGEBRA, THIS IS THE MATRIX

WHICH PRODUCES THE IDENTITY WHEN LEFT-MULTIPLIED WITH THE ORIGINAL.

WHEN USED WITH SCALARS, @ IS EQUIVALENT TO +.

g will treat vectors as 1xL matrixes. By will return the vector vi so that VI + xV = y - 1

SQUARE MATRIXES WILL BE INVERTED NORMALLY.

FOR EXAMPLE: IF M => 1 2 BM => T2 1 3 4 1.5 T0.5

SOME MON-SQUARE MATRIMES MAY ALSO BE INVERTED.

FOR EMAMPLE: IF M2 => 1 4 THEH BM2 => T0.9444 T0.1111 0.7222 2 5 0.4444 0.1111 T0.2222

3 6

IF M IS NOT INVERTIBLE, A 'DOMAIN ERROR' WILL RESULT.

THE SYMBOL & (ALT x) IS USED FOR THE DYADIC MATRIX DIVIDE FUNCTION.

IT TAKES ARITHMETIC ARGUMENTS WITH RANK ( 3. THE TWO ARGUMENTS MUST HAVE THE SAME NUMBER OF ROWS.

IN TERMS OF NATRIX ALGEBRA, IT LEFT MULTIPLIES THE LEFT ARGUMENT BY THE LEFT INVERSE OF THE RIGHT ARGUMENT.

REA PRODUCES THE SOLUTION TO THE SET OF LINEAR EQUATIONS AX=B.

WHEN USED WITH TWO SCALARS, & IS EQUIVALENT TO +.

when used with vectors,  $\underline{\mathbf{g}}$  operates as if the vectors are  $1\chi c$  or  $\kappa \chi 1$  matrixes, whichever is appropriate.

•••••••••••••••••

THE SYMBOLS .. (UPSHIFT J FOLLOWED BY A PERIOD) ARE PLACED PRECEDING ANY DYADIC FUNCTION SYMBOL TO PRODUCE THE OUTER PRODUCT FUNCTION. THE ARGUMENTS MAY BE NUMERIC OR CHARACTER, IF THE DYADIC SYMBOL ACCEPTS CHARACTER ARGUMENTS. THEY MAY BE OF ANY RANK AND DO NOT HAVE TO AGREE IN SHAPE.

THE DUTER PRODUCT RESULTS IN THE DYADIC SYMBOL OPERATING ON EACH ELEMENT OF THE LEFT ARGUMENT COMBINED WITH EVERY ELEMENT OF THE RIGHT ARGUMENT.

OUTER PRODUCT (ALSO CALLED 'JOT DOT' BECAUSE OF THE SYMBOLS)

CAN BE EXTENDED TO ARRAYS OF ANY DIMENSION OR SIZE,

THE SHAPE OF THE RESULT WILL ALWAYS BE EQUAL TO THE SHAPE OF THE

LEFT ARGUMENT CATENATED TO THE SHAPE OF THE RIGHT ARGUMENT,

FOR EXAMPLE: IF \$A1 => 3 4 AND \$A2 => 6 5

THEN \$A10.+A2 => 3 4 6 5

THE SYMBOL . (PERIOD OR 'DOT') MAY BE PLACED BETWEEN ANY TWO DIADIC FUNCTION SYMBOLS TO CREATE THE INNER PRODUCT FUNCTION.

THE ARGUMENTS MAY BE NUMERIC OR CHARACTER, IF APPROPRIATE, OF ANY RANK. THE LENGTH OF THE LAST DIMENSION OF THE LEFT ARGUMENT MUST BE THE SAME AS THE LENGTH OF THE FIRST DIMENSION OF THE RIGHT ARGUMENT.

INNER PRODUCT IS MOST CCMMONLY USED WITH  $\pm$  AND x TO FORM THE CONVENTIONAL DOT PRODUCT OR MATRIX PRODUCT OF MATRIX ALGEBRA. FOR EXAMPLE: IF V1 => 1 2 3 AND V2  $\approx$ > 4 5 6 THEN V1 +, x V2 => 32

INNER PRODUCT MAY BE EXTENDED TO HIGHER LEVEL ARRAYS AS WELL AS MATRIXES. THE SHAPE OF THE RESULT WILL BE THE SAME AS THE SHAPE OF THE LEFT ARGUMENT CATENATED TO THE SHAPE OF THE RIGHT ARGUMENT, OMITTING THE MATCHING DIMENSIONS (LAST ON THE LEFT, FIRST ON THE RIGHT.

FOR EXAMPLE: IF  $pA1 \Rightarrow 364$  AND  $pA2 \Rightarrow 45$ THEN  $pA1 + xA2 \Rightarrow 365$   $, \dots, \dots, \dots, \dots, \dots, \dots, \dots, \dots, \dots, \dots$ 

THE SYMBOL ( (UPSHIFT I) IS USED FOR THE DYADIC INDEX OF FUNCTION.

- THE LEFT ARGUMENT MUST BE A VECTOR AND THE RIGHT ARGUMENT CAN BE ANT RAPK. INDEX OF CAN BE USED WITH CHARACTER OR NUMERIC DATA.
- IT RETURNS THE POSITION IN THE LEFT ARGUMENT OF THE ELEMENTS OF THE RIGHT ARGUMENT. THE SHAPE OF THE RESULT IS THE SAME AS THE SHAPE OF THE RIGHT ARGUMENT.
- IF THE RIGHT ARGUMENT DOES NOT OCCUR IN THE LEFT ARGUMENT, THE RESULT WILL BE ONE PLUS THE LENGTH OF THE LEFT ARGUMENT.

FOR EXAMPLE:  $4 \ 3 \ 2 \ 113 = 1$  2 BECAUSE 3 IS IN THE SECOND POSITION THELLOTY (P) = 2 6 BECAUSE P IS NOT FOUND

Via checks each element of the RIGHT ARGUMENT INDIVIDUALLY.

FOR EXAMPLE: 3 5 7 911 2 3 4 5 => 5 5 1 5 2

IF YOU ASSIGN ALPHABET+'ABCDEFGHIJKLMNOPGRSTUVWXYZ'

THEN ALPHABET('APL' => 1 16 12

THE SYMBOL  $\tau$  (UPSHIFT M) IS USED FOR THE DYADIC ENCODE FUNCTION.

- IT TAKES NUMERIC ARGUMENTS OF ANY RANK AND RETURNS THE REPRESENTATION OF THE RIGHT ARSUMENT IN THE NUMBER SYSTEM SPECIFIED BY THE LEFT ARGUMENT.
- THE ENTRIES IN THE LEFT ARGUMENT DEFINE THE NUMBER OF VALUES THAT CAN BE PLACED IN THAT POSITION.
- FOR EXAMPLE, IN THE BIMARY SYSTEM, EACH POSITION CAN TAKE ONE OF TWO VALUES, 0 OR 1. THEREFORE, TO TRANSLATE 133 INTO BIMARY, ENTER:  $2\ 2\ 2\ 2\ 2\ 2\ 2\ 2\ 10\ 0\ 0\ 1\ 0\ 1$
- THE RESULT WILL ALWAYS BE THE SAME SHAPE AS THE LEFT ARGUMENT, SO BE SURE THAT THE LEFT ARGUMENT IS LARGE ENOUGH TO BE CORRECT. FOR EXAMPLE:  $2\ 2\ 2 \pm 133 => 1\ 0\ 1$
- ENCODE CAN ALSO BE USED TO TRANSLATE TIMES. GIVEN TIME IN SECONDS, ENTER (2000 365 24 60 50)  $_{\rm T}$  TIME TO RECEIVE A VECTOR OF YEARS (0 TO 1999), DAYS (0 TO 364), HOURS (0 TO 23), MINUTES (0 TO 60), AND SECONDS (3 TO 60).

FOR EXAMPLE: 2000 365 24 60 60+455701 => 0 5 6 51 41

THE SYMBOL 1 (UPSHIFT B) IS USED FOR THE DYADIC DECODE FUNCTION.

IT TAKES NUMERIC ARGUMENTS OF ANY RANK AND RETURNS THE DECIMAL VALUE

OF THE RIGHT ARGUMENT WHICH IS WRITTEN IN THE NUMBER SYSTEM

SPECIFIED BY THE LEFT ARGUMENT.

- THE ENTRIES IN THE LEFT ARGUMENT DEFINE THE VALUES OF EACH POSITION IN THE NUMBER SYSTEM.
- FOR EXAMPLE, IN THE BINARY SYSTEM, EACH POSITION CAN TAKE ONE OF TWO VALUES, 0 OR 1. THEREFORE, TO TRANSLATE 10000101 FROM BINARY:

  2 1 1 0 0 0 0 1 0 1 => 133
- UNLESS ONE ARGUMENT IS A SCALAR, THE ARGUMENTS MUST BE THE SAME SHAPE OR A 'LENGTH ERROR' WILL BE PRODUCED.
- DECODE CAN ALSO BE USED TO TRANSLATE TIMES. GIVEN TIME IN YEARS, (0 TO 1999), DAYS (0 TO 364), HOURS (0 TO 23), MINUTES (0 TO 60), AND SECONDS (0 TO 60), ENTER 2000 365 24 60 60 1 TIME TO FIND THE TIME IN SECONDS.
- FOR EMAMPLE: 2000 365 24 60 60 1 0 5 6 51 41 => 456701

THE SYMBOL & (ALT [) IS USED FOR THE MONADIC EXECUTE FUNCTION.

IT TAKES A VECTOR CHARACTER ARGUMENT ONLY, AND TREATS IT AS

AH AFL EXPRESSION.

FOR EXAMPLE: 11 + 2' =) 3

IF V=Y 'HELF',  ${1\over 2}V$  WILL RUN THE HELP FUNCTION HOWEVER,  ${1\over 2}$  WILL NOT EXECUTE EXPRESSIONS BEGINNING WITH ) OR  $\nabla_{*}$ 

THE SYMBOL . (ALT 7) IS USED FOR THE DYADIC FORMAT FUNCTION.

THE RIGHT ARGUMENT MUST BE NUMERIC, OF ANY RANK, AND THE LEFT ARGUMENT MUST BE A VECTOR OF INTEGERS.

- THIS FUNCTION CONVERTS THE RIGHT ARGUMENT TO CHARACTER DATA IN A TABULAR FORMAT SPECIFIED BY THE LEFT ARGUMENT, AS FOLLOWS:
- IF THE LEFT ARGUMENT IS A SCALAR, THE RIGHT ARGUMENT WILL BE WRITTEN WITH THAT NUMBER OF DECIMAL PLACES.
- FOR EXAMPLE: 2+14 => 14.00 (REMEMBER THIS IS NOW CHARACTER DATA) 3+15 28.35 0.1475 => 15.000 28.350 .148 NOTICE THAT THE COLUMNS ARE OF EQUAL WIDTH, SEPARATED BY ONE SPACE.
- IF THE LEFT ARGUMENT IS A VECTOR OF LENGTH TWO, EACH COLUMN IN THE RIGHT ARGUMENT WILL TAKE UP THE NUMBER OF SPACES SPECIFIED BY THE FIRST ELEMENT OF THE LEFT ARGUMENT, AND EACH ENTRY WILL HAVE THE NUMBER OF DECIMAL PLACES SPECIFIED BY THE SECOND ENTRY IN THE LEFT ARGUMENT. FOR EXAMPLE:
- IF M =: 1.2 3 THEN 5 1+M =: 1.2 3.1 74.0 5.5 74 5.55
- THE COLUMN ELEMENT MUST BE LARGE ENOUGH TO WRITE THE LONGEST ENTRY. INCLUDING ONE SPACE EACH FOR A NEGATIVE SIGN OR DECIMAL POINT. IF IT IS NOT, A 'LENGTH ERROR' WILL RESULT.
- REMEMBER TO ALLOW FOR A BLANK BETWEEN COLUMNS: 3 1+1 2 => 1.02.0
- THE LEFT ARGUMENT MAY ALSO BE A VECTOR OF LENGTH EQUAL TO EXACTLY TWICE THE NUMBER OF COLUMNS IN THE PIGHT ARGUMENT.
- IN THIS CASE, THE ENTRIES IN THE LEFT ARGUMENT ARE PAIRED AND EACH PAIR GOVERNS THE FORMAT OF THE CORRESPONDING COLUMN, AS ABOVE.
- 6 2 5 1 10 0 + 113.524 1 300.24 => 113.52 1.0 300
- OHE FINAL TWIST: IF THE LEFT ARGUMENT IS A NEGATIVE SCALAR, THE

RESULT WILL BE WRITTEN IN EXPONENTIAL NOTATION, WITH THE NUMBER OF DECIMAL PLACES IN THE MANTISSA EQUAL TO ONE LESS THAN THE ABSOLUTE VALUE OF THE LEFT ARGUMENT.

FOR EXAMPLE: 11+3 200 => 3500 2502

73+4.6167 10.56 400 => 4.62E00 1.06E01 4.00E02

THE SYMBOL + (ALT ]) IS USED FOR THE MONADIC FORMAT FUNCTION,

IT TAKES A NUMERIC OR CHARACTER ARGUMENT OF ANY RANK AND CONVERTS

IT TO CHARACTER DATA.

THIS IS USEFUL IN CATENATING NUMERIC VARIABLES TO CHARACTER DATA. FOR EXAMPLE: IF S => 3 AND V => 'GO TO LINE'  $V_*S \text{ will Produce A 'DOMAIN ERROR' BUT } V_*S \Rightarrow GO TO LINE 3$ 

## D. MAKING MODIFICATIONS

The variable HOWMODS is included in the TUTOR workspace to guide the advanced student, programmer, or instructor who wishes to expand, modify, or customize the TUTOR functions and variables. Some suggestions for improvement are discussed in thapter 3. Any ideas for modification of TUTOR are welcomed--please pass them along to Professor R. R. Read or the author of this thesis, in care of the Operations Analysis curricular office.

.HOWMODS

THE FOLLOWING ARE SOME TIPS ON MODIFTING THE TUTOR WORKSPACE:

TO MODIFY TEXT OF DESCRIPTIVE VARIABLES!

KEDIT THE VARIABLE (CHECK MAT FOR SHORT NAME)

BE SURE TO INCLUDE THE APPROPRIATE FIRST COLUMN CONTROL CHARACTERS:

- , FOR GENERAL DESCRIPTION
- . FOR SCALAR DESCRIPTION AND EXAMPLES
- V FOR VECTOR DESCRIPTION AND EXAMPLES
- N FOR MATRIX DESCRIPTION AND EXAMPLES
- \* FOR HIGHER-LEVEL ARRAYS DESCRIPTION AND EXAMPLES
- TO CHANGE THE ORDER OF LESSONS:

MEDIT MAT TO ASSIGN NEW LESSON NUMBERS.

THEN, TO REORDER MAT ACCORDING TO LESSON NUMBERS, ENTER: OFDERMAT

TO WRITE NEW LESSONS!

WRITE A NEW TEXT VARIABLE, USING CONTROL CHARACTERS AS ABOVE. XEDIT HAT TO ADD A NEW ROW. BE SURE TO INCLUDE:

LESSON NUMBER COL 1-3:

COL 28-31: NAME OF THE TEXT VARIABLE (LIMIT 4 CHARACTERS)

COL 35-51: FULL NAME OF THE LESSON (LIMIT 23 CHARACTERS)

THE OTHER COLUMNS MAY BE LEFT BLANK AS THEY PERTAIN TO FUNCTION STMBOLS ONLY.

TO CHANGE OR WRITE NEW QUESTIONS (MOT DRILL):

XEDIT CUES TO CHANGE OR ADD A QUESTION. BE SURE TO ENCLOSE THE TEXT OF THE QUESTION, BUT NOT VARIABLES, IN QUOTE MARKS. A CARRIAGE RETURN MAY BE INCLUDED BY USING THE VARIABLE CR. ANSWER GROUPS MAY BE SEPARATE VARIABLES SUCH AS AR, RK. XEDIT SHOW TO INCLUDE NEW QUESTIONS IN ANY QUESTION VECTOR QV.

BE SURE TO INCLUDE THE CORRESPONDING ANSWER IN THE VECTOR AV.

# APPENDIX C SAMPLE RUN

This appendix contains a printout of a session with the APL tutor. Student response to questions is preceded by a dot or period. (This is a function of the terminal and not part of the input.) Other student input is generally indented eight spaces and preceded by several blank lines. At least one example of each of the various ways to use the TUTOR is included. Also the various types of student response to questions and drills are demonstrated.

)LOAD TUTOR

SAVED 11:11:15 12/14/83

YOU MAY USE THE APL TUTOR IN THREE WAYS:

- (1) ENTER: HELP

  TO SELECT THE SYMBOLS THAT YOU WANT INFORMATION ABOUT.
- (2) ENTER: TEACH

  TO SELECT THE SYMBOLS THAT YOU WANT INFORMATION AND DRILL ON.
- (3) ENTER: MENU

  TO SEE A LIST OF SYMBOLS AND TOPICS.

IF YOU HAVE NEVER USED THE APL TUTOR BEFORE, ENTER: START

TO SEE THESE INSTRUCTIONS AGAIN AT ANY TIME, ENTER: HOW

START

WELCOME TO THE AFL TUTOR.

THE PURPOSE OF THIS WORKSPACE IS TO INTRODUCE YOU TO

'A PROGRAMMING LANGUAGE' BY DESCRIBING THE FUNCTIONS OF THE

MANY SPECIAL APL SYMBOLS, AND BY OUTLINING THE PROCEDURES FOR

DESIGNING YOUR OWN FUNCTIONS.

- THE APL TUTOR ASSUMES YOU HAVE HAD LINEAR ALGEBRA AND TRIGINOMETRY. CALCULUS IS NOT NECESSARY.
- IF YOU HAVE HEVER HAD ANY COMPUTER PROGRAMMING BEFORE, DON'T WORRY,
  YOU CAN START USING APL RIGHT AWAY, AS A SUPER-SOPHISTICATED
  CALCULATOR WITH MANY BUILT-IN FUNCTIONS.
- IF YOU HAVE STUDIED OTHER COMPUTER PROGRAMMING LANGUAGES, RELAX.

APL IS NOT LIKE ANY OF THE OTHER MAJOR HIGH-LEVEL LANGUAGES, YOU CAN FORGET ABOUT DATA TYPES, INPUT/OUTPUT FORMATTING, AND MANY OF THE OTHER TEDIOUS DETAILS OF FORTRAM, PASCAL, ETC.

AFTER YOU ARE SUFFICIENTLY FAMILIAR WITH THE CALCULATOR MODE
OF APL, YOU CAN LEARN TO DEFINE YOUR OWN FUNCTIONS WITH GASE.

HERE IS SOME BASIC INFORMATION YOU WILL NEED TO KNOW IN ORDER TO UNDERSTAND THE APL TUTOR LESSONS.

#### MONADIC AND DYADIC FUNCTIONS

- YOU ARE ALREADY FAMILIAR WITH SYMBOLS WHICH REFRESENT ARITHMETIC

  FUNCTIONS, SUCH AS + OR +. APL USES THESE SYMBOLS AND MARY OTHERS

  TO REPRESENT A VARIETY OF FUNCTIONS.
- MANY FUNCTIONS, SUCH AS +, REQUIRE TWO ARGUMENTS, THAT IS, TWO INFUT NUMBERS. IN APL, THESE ARE CALLED DYADIC FUNCTIONS, AND THE SYMBOL IS PLACED BETWEEN THE ARGUMENTS; FOR EXAMPLE, 3+4.
- OTHER FUNCTIONS, SUCH AS LN (NATURAL LOG), REQUIRE ONLY ONE ARGUMENT.

  THESE MONADIC FUNCTION SYMBOLS ARE PLACED TO THE LEFT OF THE DATA

  WHICH THEY ARE TO OPERATE ON. FOR EXAMPLE, LN 3 IN APL IS \$3.

### DATA TYPES

APL DISTINGUISHES ONLY TWO TYPES OF DATA: NUMERIC AND CHARACTER,
VERY SIMPLY, CHARACTER DATA ARE ENCLOSED IN QUOTES (') WHEN ENTERED.
'2' IS CHARACTER DATA; 2 IS NUMERIC DATA. SOME FUNCTIONS
WILL OPERATE ON BOTH TYPES OF DATA, SOME ONLY ON NUMERIC.

#### ARRAYS

THE GREATEST STRENGTH OF APL LIES IN ITS ABILITY TO TAKE AN ENTIRE ARRAY OF NUMBERS AS A SINGLE ARGUMENT. THUS TWO MATRIXES CAN BE ADDED BY ENTERING SIMPLY A+B, WITH NO SUBSCRIPTS, LOOPS, ETC.

THIS MAKES IT IMPORTANT TO KNOW THE RANK (THE NUMBER OF DIMENSIONS)

OF DATA IN USE. A SINGLE NUMBER IS NORMALLY A SCALAR (RANK 0).

A SERIES OF NUMBERS IS A VECTOR, A ONE-DIMENSIONAL ARRAY (RANK 1).

- NUMBERS CAN ALSO BE ARRANGED IN ROWS AND COLUMNS, TO MAKE A MATRIXES CAN BE "STACKED" TO MAKE UP THE MAGES OF A THREE-DIMENSIONAL ARRAY, OFTEN CALLED A MOOK (RANK 3). IN FACT, THERE IS NO LIMIT TO THE NUMBER OF DIMENSIONS IN AN APL ARRAY.
- THE LENGTH OF THE DIMENSIONS IS ALSO EFFECTIVELY UNLIMITED. LENGTH REFERS TO THE NUMBER OF ELEMENTS IN A DIMENSION, FOR EXAMPLE, THE NUMBER OF ROWS. LENGTH MAY EVEN BE 0.
- IN THIS TUTORIAL, A SCALAR MAY BE REFERRED TO AS 5, L, OR R.

  A VECTOR MAY BE CALLED V, V1, OR V2, WHILE A MATRIX IS M, M1, OR M2.

  AN ARRAY, WHICH MAY BE A VECTOR, A MATRIX, OR AN ARRAY OF ANY HIGHER DIMENSION, WILL BE LABELLED A, A1, OR A2.

#### EXAMPLES

WHEN EXAMPLES ARE GIVEN IN THE TEXT OF A FUNCTION DESCRIPTION, THE

SYMBOL =) IS USED BETWEEN THE EXAMPLE INPUT AND THE EXAMPLE OUTPUT,

FOR EXAMPLE: 2+5 => 7

THIS SYMBOL CAN BE READ AS 'PRODUCES' OR 'RETURNS'.

#### ERRORS

- YOU SHOULD NOT RECEIVE ANY ERROR MESSAGES WHILE USING AFL TUTOR.

  HOWEVER, YOU MAY SEE A PHRASE LIKE 'VALUE ERROR' (WITHOUT QUOTE MARKS) WHEN YOU ARE EXPECTING A NORMAL RESPONSE.
- OR IF YOU ACCIDENTALLY HIT THE ENTER KET WHEN THE COMPUTER IS NOT EXPECTING AN INPUT, THE FUNCTION MAY END ABRUPTLY, LIKE THIS; MENU [6]
- IF EITHER OF THESE THINGS HAPPEN, BE SURE TO ENTER:  $\rightarrow$  (UPSHIFT  $\leftarrow$ )
  THEN RESTART WITH ANY COMMAND.

# HALTING A LESSON

YOU MAY STOP ANY LESSON AT ANY POINT WHERE A QUESTION IS ASKED BY ENTERING: STOP

TO SEE THIS INFORMATION AGAIN AT ANY TIME, ENTER: BASICS

1

YOU MAY START A LESSON IN THREE WAYS:

- (1) ENTER: LESSON NEXTLESSON

  TO START THE LESSON FOLLWING THE LAST ONE YOU COMPLETED.
- (2) ENTER: LESSON NNH (WHERE HAN IS A 3-DIGIT NUMBER)

  TO START LESSON NUMBER NNH.

  TO SEE A LIST OF LESSON NUMBERS, ENTER: MENU
- (3) ENTER: TEACH

  TO SELECT THE STMBOL THAT YOU WANT A LESSON ON.

TO SEE THIS INFORMATION AGAIN AT ANY TIME, ENTER: HOWTEACH

TO START YOUR FIRST LESSON IN APL, ENTER: LESSON 101

## LESSON 101

THE SYMBOL T (UPSHIFT 2) IS USED ONLY TO ENTER HEGATIVE NUMBERS.

IT CAN BE USED ONLY IN FRONT OF SCALARS (SINGLE NUMBERS),

NOT VARIABLE NAMES, ARITHMETIC EXPRESSIONS, OR ARRAYS.

TO CHANGE ARITHMETIC SIGN USE THE SYMBOL - (UPSHIFT +).

HOW MANY ARGUMENTS DOES THE NEGATIVE\_NUMBER FUNCTION TAKE? .1 RIGHT

WHAT RANK CAN THE RIGHT ARGUMENT OF MEGATIVE\_NUMBER BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

,s RIGHT

CAN NEGATIVE\_NUMBER TAKE CHARACTER ARGUMENTS?
.N
RIGHT

THIS IS THE END OF YOUR LESSON.

FOR THE NEXT LESSON IN SEQUENCE, ENTER: LESSON HENTLESSON
TO START ANOTHER LESSON, ENTER: LESSON NAM

LESSON HEXTLESSON

THE SYMBOL + IS USED FOR THE MONADIC CONJUGATE FUNCTION.

THIS IS AN IDENTITY FUNCTION WHICH RETURNS ITS AFGUMENT, AFTER

EVALUATION IF RECESSARY. IT TAKES NUMERIC AFGUMENTS OF ANY FANK.

.............

HOW MANY ARGUMENTS DOES THE CONJUGATE FUNCTION TAKE?

THIS LESSON HAS BEEN HALTED,
TO START ANOTHER LESSON, ENTER: LESSON NHN

THE SYMBOL + (UPSHIFT X) IS USED FOR THE DYADIC DIVISION FUNCTION.

IT PERFORMS SIMPLE DIVISION ON NUMERIC ARGUMENTS OF ANY RAPK.

HOW MANY ARGUMENTS DOES THE DIVIDE FUNCTION TAKE?

SORRY, PLEASE TRY AGAIN

HOW MANY ARGUMENTS DOES THE DIVIDE FUNCTION TAKE?

.2

RIGHT

WHAT RANK CAN THE LEFT ARGUMENT OF DIVIDE BE?

ENTER 5 FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

, 5

SORRY, PLEASE TRY AGAIN

WHAT RANK CAN THE LEFT ARGUMENT OF DIVIDE BE?

EHTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR AHT RANK

, A

RIGHT

WHAT RANK CAN THE RIGHT ARGUMENT OF DIVIDE BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

, 5

SORRY, PLEASE TRY AGAIN

WHAT RANK CAN THE RIGHT ARGUMENT OF DIVIDE BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR WATRIX

A FOR ANY RANK

٠,٧

SORRY, PLEASE TRY AGAIN

WHAT RANK CAN THE RIGHT ARGUMENT OF DIVIDE BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

, ×

SORRY, THE CORRECT AMSWER IS A
YOU ENTERED 5 WRONG AMSWERS OUT OF 3 QUESTIONS.
IF YOU WANT TO RETAKE THIS LESSON, ENTER: LESSON 107

THIS LESSON HAS BEEN HALTED.

TO START ANOTHER LESSON, ENTER: LESSON NUM

# HELP

ENTER THE SYMBOL(S) YOU WOULD LIKE INFORMATION ABOUT,

OR ... FOR MENU SELECTION, ENTER: MENU

### MENU

IMPORMATION IS AVAILABLE ON THE FOLLOWING STMBOLS/TOPICS:

| 101 T NEGATIVE_NUMBER   | 102 + CONJUGATE     | 103 + FLUS              |
|-------------------------|---------------------|-------------------------|
| 104 - CHANGE_SIGN       | 105 - MINUS         | 106 x SIGHUM            |
| 107 x TIMES             | 108 + RECIPROCAL    | 109 - DIVIDE            |
| 121 ( PARENS            | 122 · GUOTE         | 123 + SPECIFICATION     |
| 124 F SHAPE             | 125 F RESHAPE       | 126 [ BRACKETS          |
| 127 , RAVEL             | 128 , CATEMATE      | 129 \ INTEX_GEMERATOR   |
| 131 / REDUCTION         | 132 ≠ REDUCTION     | 141 * EMPONENTIAL       |
| 142 * FOWER             | 143 • HATURAL_LOG   | 144 # LOGARITHM         |
| 145 @ FI_TIMES          | 145 @ GEOMETRIC     | 147 : FACTORIAL         |
| 148 : BINOMIAL          | 149   MAGNITUDE     | 151 \ scen              |
| 152 % SCAH              | 161   CEILING       | 162 L FLCOR             |
| 163 F MAXIMUM           | 164 L MINIMUM       | 165   RESIDUE           |
| 166 & GRADE_UP          | 167 # GRADE_DOWN    | 168 ? 801_              |
| 169 ? DEAL              | 180 = EQUAL         | 181 ≠ NOT_EQUAL         |
| 182 ( LESS_THAM         | 183 < LESS_OR_EQUAL | 184 > GREATER_OR_EQUAL  |
| 185 ) GREATER_THAN      | 191 ~ NOT           | 192 A AND               |
| 193 * NAND              | 194 v OR            | 195 ₩ HOR               |
| 196 € MEMBER OF         | 201 · REVERSE       | 202 B REVERSE           |
| 203 & ROTATE            | 204 8 ROTATE        | 205 & TRANSPOSE-MONADIC |
| 206 % TRANSPOSE-DYADIC  | 211 A TAKE          | 212 ♦ DROP              |
| 213 / COMPRESS          | 214 / COMPRESS      | 215 \ EXPAND            |
| 216 % EXPAND            | 219 , LAMINATE      | 231 # MATRIM_INVERSE    |
| 232 9 MATRIX_DIVIDE     | 241 · OUTER_PRODUCT | 242 . INHER_PRODUCT     |
| 301 \ IMPEX_OF          | 304 T ENCODE        | 305 L DECODE            |
| 306 • EXECUTE           | 307 + FORMAT-DYADIC | 308 + FORMAT-MONADIC    |
| TO SEE MENU AGAIN, ENTE | R: MEHU             |                         |

FOR INFORMATION ABOUT FUNCTION, ENTER: INFO HAN (WHERE HAN IS MENU H

UMBER)

TO GO THROUGH TUTORIAL LESSON, ENTER: LESSON NHM

```
LESSON 107
```

THE SYMBOL X IS USED FOR THE DYADIC TIMES FUNCTION.

THIS PERFORMS SIMPLE MULTIPLICATION ON NUMERIC ARGUMENTS OF 40% SAME.

HOW MANY ARGUMENTS DOES THE TIMES FUNCTION TAKE?

.2

RIGHT

WHAT RANK CAN THE LEFT ARGUMENT OF TIMES BE?

ENTER 5 FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

SORRY, THE CORRECT AMSWER IS A

WHAT RANK CAN THE RIGHT ARGUMENT OF TIMES BE?

ENTER 5 FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

THA.

RIGHT

FOR EXAMPLE: 2x4 => 8 ORDER AND SPACING ARE NOT IMPORTANT.

DOES 51x52 EQUAL 52x51?

۲,

RIGHT

WHAT IS THE RESULT OF:

720 x 80

.~160

```
SORRY, CORRECT ANSWER IS:
71400
WHAT IS THE RESULT OF:
80 x ~30
.72400
CORRECT!
TO MULTIPY EACH ELEMENT OF A VECTOR BY A SCALAR, ENTER SXV OR VXS.
V1xV2 RESULTS IN THE PRODUCT OF CORRESPONDING ELEMENTS OF V1 AND V2.
FOR EXAMPLE: 3x(123) \Rightarrow 369
                                          (1 2 3) ×3 => 3 6 9
              (1 \ 2 \ 3) \times (2 \ 4 \ 6) \Rightarrow 2 \ 3 \ 18
IF V1 AND V2 ARE NOT THE SAME LENGTH, YOU WILL GET A 'LENGTH ERROR'.
IF ONE ARGUMENT IS A VECTOR, THE OTHER ARGUMENT MAY BE SCALAR OF VECTOR.
       (T/F)
, T
RIGHT
WHAT IS THE RESULT OF:
T0.6 x T0.5 0.9
.7.3 .54
SORRY, CORRECT ANSWER IS:
0.3 70.54
WHAT IS THE RESULT OF:
0.1 x 0.2 0.7
..2 .7
SORRY, CORRECT ANSWER IS:
0.02 0.07
WHAT IS THE RESULT OF:
-0.2 x -0.1 0.6
.7.02 7.12
SORRY, CORRECT ANSWER IS:
0.02 -0.12
```

PLEASE REVIEW THE DESCRIPTION OF THIS FUNCTION OR TALK WITH YOUR

INSTRUCTOR BEFORE RETURNING TO THIS UNIT.

THIS LESSON HAS BEEN HALTED.

TO START ANOTHER LESSON, ENTER: LESSON NAME

LESSON 124

······ f

THE SYMBOL P IS USED FOR THE MONADIC SHAPE FUNCTION.

THIS RETURNS A DESCRIPTION OF THE SIZE OF ITS ARGUMENT, WHICH CAN BE NUMERIC OR CHARACTER, OF ANY RANK.

THE SYMBOL CAN BE USED TWICE (PPA) TO RETURN THE RANK OF ITS ARGUMENT.

HOW MANY ARGUMENTS DOES THE SHAPE FUNCTION TAKE?

. 1

RIGHT

WHAT RANK CAN THE RIGHT ARGUMENT OF SHAPE BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANT RANK

, A

RIGHT

IF THE ARGUMENT IS A SCALAR, ps returns no number (an empty vector), Because a scalar has no dimension. pps = 0

ENTERING BY RETURNS ONE NUMBER WHICH REFRESENTS THE LENGTH OF THE VECTOR'S ONE DIMENSION. FRY  $\approx 1$ 

WHAT IS THE RESULT OF:

r 10 20 90 40

. F4

SORRY, THIS ANSWER NOT ACCEPTABLE, PLEASE ENTER A NUMERIC ANSWER.

WHAT IS THE RESULT OF:

f 10 20 90 -40

. 4

CORRECT!

WHAT IS THE RESULT OF:

F 203

٠3

CORRECT!

THE SHAPE OF MATRIXES IS EXPRESSED AS A TWO-ELEMENT VECTOR.

THE FIRST ELEMENT EQUALS THE NUMBER OF ROWS (THE LENGTH OF THE FIRST DIMENSION), AND THE SECOND ELEMENT EQUALS THE NUMBER OF COLUMNS (THE LENGTH OF THE SECOND DIMENSION).

FOR EXAMPLE: IF M => 1 2 3 THEN pM => 2 3 AND ppM => 2 4 5 6

FOR HIGHER-LEVEL ARRAYS, PA WILL BE A VECTOR WITH AS MANY ELEMENTE AS A HAS DIMENSIONS. THE NUMBER OF COLUMNS WILL ALWAYS BE THE LAST ELEMENT OF PA. THE NUMBER OF ROWS WILL ALWAYS BE THE MEXT-TO-LAST ELEMENT, PRECEDED BY THE NUMBER OF 'PAGES' OR PLANES, PRECEDED BY THE NUMBER OF 'BOOKS' OR SPACES, AND SO ON.

FOR EXAMPLE: IF D IS A 4-DIMENSIONAL ARRAY, PPD => 4.

IF PD => 5 3 4 2 THEN D HAS 5 BOOKS, EACH WITH 3 PAGES, EACH OF WHICH HAS 4 ROWS AND 2 COLUMNS. (THIS WOULD BE DISPLAYED AS FIFTEEN SUCCESSIVE 4x2 MATRIXES--THE FIRST THREE BEING THE FIRST

BOOK, THE SECOND THREE BEING THE SECOND BOOK, ETC.)

CAN SHAPE TAKE CHARACTER ARGUMENTS?

, Y

RIGHT

IF SO, WHICH ARGUMENT(S) CAN BE CHARACTER?

ENTER R FOR RIGHT,

L FOR LEFT, OR

B FOR BOTH

,R

RIGHT

THIS IS THE EMD OF YOUR LESSON.

FOR THE MEXT LESSON IN SEQUENCE, ENTER: LESSON MEXTLESSON
TO START ANOTHER LESSON, ENTER: LESSON MAN

LESSON NEXTLESSON

THE SYMBOL P IS USED FOR THE DYADIC RESHAPE FUNCTION.

THIS TAKES THE ELEMENTS OF THE RIGHT ARGUMENT AND REARRANGES THEM ACCORDING TO THE SHAPE SPECIFIED BY THE LEFT ARGUMENT.

THE LEFT ARGUMENT MUST BE AN INTEGER SCALAR OR A VECTOR OF INTEGER ELEMENTS.

THE RIGHT ARGUMENT CAN BE NUMERIC OR CHARACTER, OF ANY FANK,

HOW MANY ARGUMENTS DOES THE RESHAPE FUNCTION TAKE?

.2

RIGHT

WHAT RANK CAN THE LEFT ARGUMENT OF RESHAPE BE?

ENTER 5 FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

٠v.

RIGHT

WHAT RANK CAN THE RIGHT ARGUMENT OF RESHAPE BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANY RANK

. A

RIGHT

IF THE LEFT ARGUMENT IS A SCALAR, THE RESULT WILL BE A VECTOR WITH LENGTH EQUAL TO THE SCALAR, CONSISTING OF THE ELEMENTS OF THE RIGHT ARGUMENT, TAKEN IN ORDER TOP LEFT TO BOTTOM RIGHT.

WHEN THERE ARE NOT ENOUGH ELEMENTS IN THE RIGHT ARGUMENT,

THE FUNCTION WILL START OVER AND TAKE THE ELEMENTS IN ORDER AGAIN,

AS MANY TIMES AS MECESSARY TO FILL THE VECTOR.

FOR EXAMPLE: 461 => 1 1 1 1

45 ('AB') => ABAB

IF THERE ARE TOO MANY ELEMENTS ON THE RIGHT, THE EXTRAS ARE OMITTED.

FOR EXAMPLE: 28(1 2 3 4) => 1 2

DOES 51952 EQUAL 52951?

, н

RIGHT

WHAT IS THE RESULT OF:

2 0.6

```
. . 5
SORRY, CORRECT ANSWER IS:
0.6 0.6
WHAT IS THE RESULT OF:
2 8 0.1
..1 .1 .1
SORRY, CORRECT ANSWER IS:
0.1 0.1
WHAT IS THE RESULT OF:
3 8 0.5
..6 .6 .6
CORRECT!
IF THE LEFT ARGUMENT IS A VECTOR, THE ELEMENTS INDICATE, IN ORDER,
   LENGTH OF EACH DIMENSION IN THE RESULT.
FOR EXAMPLE: 2 281 2 3 4 => 1 2
                               3 4
THIS IS ONE WAY TO ENTER MATRIXES OR ARRAYS OF HIGHER DIMENSION.
IF ONE ARGUMENT IS A VECTOR, THE OTHER ARGUMENT MAY BE SCALAR OR VECTOR.
      (T/F)
, T
RIGHT
WHAT IS THE RESULT OF:
```

USING A MATRIX OR HIGHER-LEVEL ARRAY AS THE LEFT ARGUMENT OF RESHAFE WILL RESULT IN A 'RANK ERROR'.

IF ONE ARGUMENT IS A MATRIX, THE OTHER ARGUMENT MUST BE A SCALAR OR A MATRIX OF THE SAME SHAPE. (T/F)

3 P 0.1 4

..1 4 .1 CORRECT!

, F

RIGHT

CAN RESHAPE TAKE CHARACTER ARGUMENTS?

·Υ

RIGHT

IF 50, WHICH ARGUMENT(S) CAN BE CHARACTER?

ENTER R FOR RIGHT,

L FOR LEFT, OR

B FOR BOTH

, R

RIGHT

THIS IS THE END OF YOUR LESSON.

FOR THE MEXT LESSON IN SEQUENCE, ENTER: LESSON MEXTLESSON
TO START ANOTHER LESSON, ENTER: LESSON MAN

TEACH ENTER THE SYMBOL(S) YOU WOULD LIKE INFORMATION ABOUT, OR FOR MENU SELECTION, ENTER: MENU . + THE SYMBOL + IS USED FOR THE MONADIC CONJUGATE FUNCTION. THIS IS AN IDENTITY FUNCTION WHICH RETURNS ITS ARGUMENT, AFTER EVALUATION IF NECESSARY. IT TAKES NUMERIC ARGUMENTS OF ANY RANK. HOW MANY ARGUMENTS DOES THE CONJUGATE FUNCTION TAKE? . 1 RIGHT WHAT RANK CAN THE RIGHT ARGUMENT OF CONJUGATE BE? ENTER S FOR SCALAR V FOR VECTOR X FOR MATRIX A FOR ANT RANK , A RIGHT EXAMPLE:  $+2 \Rightarrow 2 + 73 + 2 \Rightarrow 71.$ CAH CONJUGATE TAKE CHARACTER ARGUMENTS? RIGHT

THE SYMBOL + IS USED FOR THE DYADIC PLUS FUNCTION.

```
HOW MANY ARGUMENTS DOES THE PLUS FUNCTION TAKE?
.2
RIGHT
WHAT RANK CAN THE LEFT ARGUMENT OF PLUS BE?
ENTER S FOR SCALAR
     V FOR VECTOR
     X FOR MATRIX
     A FOR ANY RANK
.A
RIGHT
WHAT RANK CAN THE RIGHT ARGUMENT OF FLUS BE?
ENTER S FOR SCALAR
     V FOR VECTOR
     X FOR MATRIX
     A FOR ANY RANK
. ۵
RIGHT
FOR EXAMPLE: 2+2 => 4 SPACING IS NOT IMPORTANT.
DOES 51+52 EQUAL 52+51?
, Y
RIGHT
WHAT IS THE RESULT OF:
10 + 10
```

THIS PERFORMS SIMPLE ADDITION ON NUMERIC APPUMENTS OF ANY RANK.

SORRY, THIS ANSWER NOT ACCEPTABLE. PLEASE ENTER A NUMERIC ANSWER.

WHAT IS THE RESULT OF:

10 + 10

.20

CORRECT!

TO ADD A SCALAR TO EACH ELEMENT OF A VECTOR, ENTER EITHER SAV OR VAS. V1+V2 WILL ADD TWO VECTORS ELEMENT BY ELEMENT. FOR EXAMPLE:

 $2+(3 4 5) \Rightarrow 5 6 7$   $(3 4 5)+2 \Rightarrow 5 6 7$ 

 $(3 \ 4 \ 5)+(5 \ 6 \ 7) \implies 8 \ 10 \ 12$ 

IF THE TWO VECTORS BEING ADDED ARE NOT THE SAME LEMSTH, YOU WILL GET A 'LENGTH ERROR'.

IF ONE ARGUMENT IS A VECTOR, THE OTHER ARGUMENT MAY BE SCALAR OF VECTOR. (T/F)

, T

RIGHT

WHAT IS THE RESULT OF:

0.2 + 0.9 0.3

..2 + .9 .3

SORRY, THIS ANSWER NOT ACCEPTABLE, PLEASE ENTER A NUMERIC ANSWER.

WHAT IS THE RESULT OF:

0.2 + 0.9 0.3

.1.1 .5

CORRECT!

WHAT IS THE RESULT OF:

TS 4 3 + TS

STOP

THIS LESSON HAS BEEN HALTED.

THIS IS THE END OF SCHEDULED LESSONS. TO SELECT MORE LESSONS, ENTER: TEACH , TEACH

ENTER THE SYMBOL(S) YOU WOULD LIKE INFORMATION ABOUT.

OR FOR MENU SELECTION, ENTER: MENU

, MEHU

INFORMATION IS AVAILABLE ON THE FOLLOWING SYMBOLS/TOPICS:

| 101 THEGATIVE NUMBER    | 102 + CONJUGATE        | 103 ÷ PLUS              |
|-------------------------|------------------------|-------------------------|
| 104 - CHANGE_SIGN       | 105 - MINUS            | 106 x SIGHUM            |
| 107 X TIMES             | 108 + RECIPROCAL       | 109 - DIVIDE            |
| 121 ( PARENS            | 122 ' GUOTE            | 123 + SPECIFICATION     |
| 124 p SHAPE             | 125 F RESHAPE          | 126 E BRACKETS          |
| 127 , RAVEL             | 128 , CATEHATE         | 129   INDEX_GEMERATOR   |
| 131 / REDUCTION         | 132 / REDUCTION        | 141 & EXPONENTIAL       |
| 142 * FOWER             | 143 · HATURAL_LOG      | 144 • LOGARITHM         |
| 145 0 FI_TIMES          | 145 0 GEOMETRIC        | 147 : FACTORIAL         |
| 148 ! BIHOMIAL          | 149   MAGHITUDE        | 151 \ SCAH              |
| 152 % SCAN              | 161   CEILING          | 152   FLOOR             |
| 163 Г МАКІМИМ           | 164 L MINIMUM          | 165   RESIDUE           |
| 166 & GRADE_UP          | 167 # GRADE_DOWH       | 163 ? MOLL              |
| 169 ? DEAL              | 180 = EQUAL            | 181 ≠ NOT_EGUAL         |
| 182 ( LESS_THAN         | 183 1 LESS_OR_EQUAL    | 184 ) GREATER_OR_EQUAL  |
| 185 > GREATER_THAN      | 191 ~ HOT              | 192 A APB               |
| 193 A HAND              | 194 v GR               | 195 * HOR               |
| 196 E MEMBER OF         | 201 & REVERSE          | 202 e REVERSE           |
| 203 & ROTATE            | 204 B ROTATE           | 205 & TRANSPOSE-MONADIO |
| 206 & TRANSPOSE-DYADIC  | 211 + TAKE             | 212 # DROP              |
| 213 / COMPRESS          | 214 / COMPRESS         | 215 \ EXPAND            |
| 216 % EXPAND            | 219 , LAMIHATE         | 231 @ MATRIX_INVERSE    |
| 232 B MATRIX_DIVIDE     | 241 · OUTER_PRODUCT    | 242 . IHNER_PRODUCT     |
| 301   INDEX_OF          | 304 + ENCODE           | 305 T DECODE            |
| 306 : EXECUTE           | 307 + FORMAT-DYADIC    | 308 + FORMAT-MONADIC    |
| TO SEE MEHU AGAIH, ENTE | R: MEHU                |                         |
| FOR INFORMATION ABOUT F | UNCTION, ENTER: INFO H | HH (WHERE HAN IS MENU H |

TO GO THROUGH TUTORIAL LESSON, ENTER: LESSON HAN

UMBER)

```
LESSON 105
```

THE SYMBOL - (UPSHIFT +) IS USED FOR THE DYADIC MINUS FUNCTION,
IT PERFORMS SIMPLE SUBTRACTION ON NUMBERIC ARGUMENTS OF ANY SAME.

HOW MANY ARGUMENTS DOES THE MINUS FUNCTION TAKE?

.2

RIGHT

WHAT RANK CAN THE LEFT ARGUMENT OF MINUS BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIM

A FOR ANY RANK

, Α

RIGHT

WHAT RANK CAN THE RIGHT ARGUMENT OF MINUS BE?

ENTER S FOR SCALAR

V FOR VECTOR

X FOR MATRIX

A FOR ANT RANK

, A

RIGHT

DOES \$1-\$2 EQUAL \$2-\$1?

. H

RIGHT

WHAT IS THE RESULT OF:

0.1 - 0.3

. . 4

```
CORRECT!
```

TO SUBTRACT A SCALAR FROM EACH ELEMENT OF A VECTOR, ENTER V-5. TO SUBTRACT EACH ELEMENT OF A VECTOR FROM THE SAME SCALAR, ENTER SEV. V1+V2 WILL SUBTRACT EACH ELEMENT OF V2 FROM THE CORRESPONDING ELEMENT OF V1. V1 AND V2 MUST BE THE SAME LENGTH OR YOU WILL GET A "LENGTH ERROR". FOR EXAMPLE:  $(3 4 5)-2 \Rightarrow 1 2 3$   $2-(3 4 5) \Rightarrow 71 72 73$  $(6.7.8)-(1.2.3) \approx 5.5.5$ IF ONE ARGUMENT IS A VECTOR, THE OTHER ARGUMENT MAY BE SCALAR OR VECTOR. (T/F), T RIGHT WHAT IS THE RESULT OF: 0.9 - 0.6 0.5 ..3 .4 CORRECT! WHAT IS THE RESULT OF: 1 2 3 - 75 .74 73 72 SORRY, CORRECT ANSWER IS: 6 7 8 WHAT IS THE RESULT OF: 70.9 0.4 - ~0.4 .7.5 .8 CORRECT! WHAT IS THE RESULT OF:

**~0.7 0.8 - ~0.8 0.7** 

SORRY, CORRECT ANSWER IS:

..1 1.5

```
0.1 0.1
```

WHAT IS THE RESULT OF:

80 760 50 780 - 90 30 710 750

.-10 -90 60 -30

CORRECT!

ENTER M-S TO SUBTRACT THE SCALAR S FROM EACH ELEMENT OF THE MATRIX M. ENTER S-M TO DO THE OPPOSITE.

FOR EXAMPLE: IF M => 1 2 THEN 4-M => 3 2 AND M-2 => 71 0

3 4 1 9 1 3

M1-M2 SUBTRACTS MATRIX M2 FROM MATRIX M1. ELEMENT BY ELEMENT.

FOR EXAMPLE: IF  $M_1 = 1/2$  AND  $M_2 = 1/3/4$  THEM  $M_2 - M_1 = 1/2/2$ 

3 4 5 6 2 2

IF M1 AND M2 ARE NOT THE SAME SHAPE, A 'LENGTH ERROR' WILL RESULT, TRYING TO SUBTRACT A VECTOR FROM A MATRIX OR VICE-VERSA WILL PRODUCE A 'RANK ERROR'.

IF ONE ARGUMENT IS A MATRIX, THE OTHER ARGUMENT MUST BE A SCALAR OR A MATRIX OF THE SAME SHAPE, (T/F)

, T

RIGHT

THESE PRINCIPLES CAN BE EXTENDED TO HIGHER LEVEL ARRAYS.

CAN MINUS TAKE CHARACTER ARGUMENTS?

, н

RIGHT


WRITE A TRUE STATEMENT USING -.


FOR EXAMPLE: 4=2+2

.2-2=0

SORRY, THIS STATEMENT IS NOT TRUE,

TRY AGAIN,

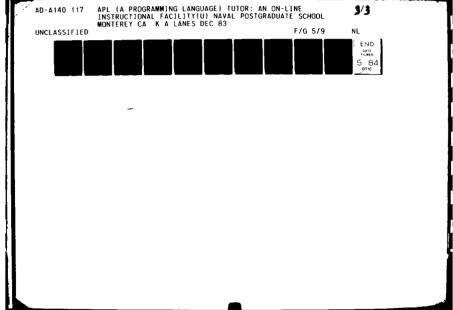



MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS-1963-A

WRITE A TRUE STATEMENT USING -.

FOR EXAMPLE: 4=2+2

.4=2+2

YOUR ANSWER DOES NOT USE -. TRY AGAIN.

WRITE A TRUE STATEMENT USING -.
FOR EXAMPLE: 4=2+2
.(2-2)=4

WRITE A TRUE STATEMENT USING -, FOR EXAMPLE: 4=2+2
.0=2-2
CORRECT:

THIS IS THE END OF YOUR LESSON.

FOR THE NEXT LESSON IN SEQUENCE, ENTER: LESSON NEXTLESSON
TO START ANOTHER LESSON, ENTER: LESSON NNN

HELP

. 1

ENTER THE SYMBOL(S) YOU WOULD LIKE INFORMATION ABOUT, OR...FOR MENU SELECTION, ENTER: MENU

......

THE SYMBOL  ${\it i}$  (UPSHIFT I) IS USED FOR THE MONADIC INDEX GENERATING FUNCTION.

- IT IS USED WITH A SINGLE NON-NEGATIVE INTEGER ARGUMENT (SCALAR, OR VECTOR OF LENGTH 1).
- IT RETURNS A VECTOR OF INTEGERS, IN ORDER, BEGINNING WITH THE INDEX ORIGIN, AND ENDING WITH THE ARGUMENT.
- FOR EXAMPLE:  $(3 \Rightarrow 123)$   $(0 \Rightarrow (AN EMPTY VECTOR))$ THE INDEX ORIGIN IS NORMALLY (BY DEFAULT) 1.
- USING & WITH A NON-INTEGER, NEGATIVE OR ARRAY ARGUMENT WILL PRODUCE A 'DOMAIN ERROR'.

THE SYMBOL 1 (UPSHIFT I) IS USED FOR THE DYADIC INDEX OF FUNCTION.

- THE SYMBOL ( (UPSHIFT I) IS USED FOR THE DYADIC INDEX OF FUNCTION, THE LEFT ARGUMENT MUST BE A VECTOR AND THE RIGHT ARGUMENT CAN BE ANY RANK, INDEX OF CAN BE USED WITH CHARACTER OR NUMERIC DATA.
- IT RETURNS THE POSITION IN THE LEFT ARGUMENT OF THE ELEMENTS OF THE RIGHT ARGUMENT, THE SHAPE OF THE RESULT IS THE SAME AS THE SHAPE OF THE RIGHT ARGUMENT,
- IF THE RIGHT ARGUMENT DOES NOT OCCUR IN THE LEFT ARGUMENT, THE RESULT WILL BE ONE PLUS THE LENGTH OF THE LEFT ARGUMENT.
- FOR EXAMPLE: 4 3 2 113  $\pm$ ) 2 SECAUSE 3 IS IN THE SECOND POSITION 'HELLO'1'P'  $\pm$ ) 6 SECAUSE P IS NOT FOUND

HORE?

, Y

Via CHECKS EACH ELEMENT OF THE RIGHT ARGUMENT INDIVIDUALLY.

FOR EXAMPLE: 3 5 7 911 2 3 4 5 => 5 5 1 5 2

IF YOU ASSIGN ALPHABET+'ABCDEFGHIJKLMNOPGRSTUVWXYZ'

THEN ALPHABET('APL' => 1 16 12

FOR MORE HELP, ENTER: HELP

#### MEHU

| INFORMATION IS AVAILABLE OH THE FOLLOWING SYMBOLS/TOPICS: |                     |                         |  |  |  |
|---|---------------------|-------------------------|--|--|--|
| 101 - NEGATIVE_NUMBER                                     | 102 + CONJUGATE     | 103 + FLUS              |  |  |  |
| 104 - CHANGE_SIGN   | 105 - MIHUS         | 106 x SIGNUM            |  |  |  |
| 107 x TIMES   | 108 ÷ RECIPROCAL    | 109 ÷ DIVIDE            |  |  |  |
| 121 ( PARENS  | 122 ' GUOTE         | 123 + SPECIFICATION     |  |  |  |
| 124 P SHAPE   | 125 P RESHAPE       | 126 [ BRACKETS          |  |  |  |
| 127 , RAVEL   | 128 , CATENATE      | 129 1 INDEX_GENERATOR   |  |  |  |
| 131 / REDUCTION   | 132 ≠ REDUCTION     | 141 & EXPONENTIAL       |  |  |  |
| 142 * POWER   | 143 • NATURAL_LOG   | 144 · LOGARITHM         |  |  |  |
| 145 0 PI_TIMES  | 146 8 GEOMETRIC     | 147 : FACTORIAL         |  |  |  |
| 148 ! BIHOMIAL  | 149   MAGNITUDE     | 151 \ SCAN              |  |  |  |
| 152 % SCAN  | 161 F CEILING       | 162 L FLOOR             |  |  |  |
| 163 F MAXIMUM   | 164 L MINIMUM       | 165   RESIDUE           |  |  |  |
| 166 & GRADE_UP  | 167 # GRADE_DOWN    | 168 ? ROLL              |  |  |  |
| 169 ? DEAL  | 180 = EQUAL         | 181 # NOT_EQUAL         |  |  |  |
| 182 ( LESS_THAN   | 183 ( LESS_OR_EQUAL | 184 > GREATER_OR_EQUAL  |  |  |  |
| 185 > GREATER_THAN  | 191 W HOT           | 192 A AND               |  |  |  |
| 193 A HAND  | 194 v OR            | 195 ¥ HOR               |  |  |  |
| 196 & MEMBER OF   | 201 • REVERSE       | 202 e REVERSE           |  |  |  |
| 203 • ROTATE  | 204 & ROTATE        | 205 & TRANSPOSE-MOHADIC |  |  |  |
| 206 TRANSPOSE-DYADIC                                      | 211 + TAKE          | 212 ★ DROP              |  |  |  |
| 213 / COMPRESS  | 214 / COMPRESS      | 215 \ EXPAND            |  |  |  |
| 216 \ EXPAND  | 219 , LAMINATE      | 231 B MATRIX_INVERSE    |  |  |  |
| 232 # MATRIX_DIVIDE                                       | 241 • OUTER_PRODUCT | 242 , INNER_PRODUCT     |  |  |  |

232 # MATRIX\_DIVIDE 241 • OUTER\_PRODUCT 242 , INNER\_PRODUCT 301 1 INDEX\_OF 304 T ENCODE 305 L DECODE 306 L EXECUTE 307 + FORMAT-DYADIC 308 + FORMAT-MONADIC

TO SEE MENU AGAIN, ENTER: MENU

FOR INFORMATION ABOUT FUNCTION, ENTER: INFO HHH (WHERE HHH IS HEHU H

TO 60 THROUGH TUTORIAL LESSON, ENTER: LESSON NHH

INFO 180

THE SYMBOL = (UPSHIFT 5) IS USED FOR THE DYADIC EQUALS FUNCTION.

THIS COMPARES NUMERIC OR CHARACTER ARGUMENTS OF ANY RANK,

IT RETURNS 1 FOR EACH ELEMENT OF THE LEFT ARGUMENT THAT IS IDENTICAL

TO THE CORRESPONDING ELEMENT OF THE RIGHT ARGUMENT, AND 0 FOR

EACH ELEMENT THAT IS NOT.

FOR EXAMPLE: 2=2 => 1 2=4 => 0 'A'='B' => 0

MORE?

, H

FOR MORE INFORMATION, ENTER: INFO HHH

TEST 211

WHAT IS THE RESULT OF:

-3 + -30 40 60 790

.40 60 790

CORRECT:
TEST OK

TEST 203

WHAT IS THE RESULT OF:
-1 0 60 70 720 740

TEST 152

WHAT IS THE RESULT OF;

(A 7 -6 -1)

7 7 7

CORRECT;

TEST OK

WHAT IS THE RESULT OF:

**4** -0.3 -0.4

.2 1

CORRECT;

WHAT IS THE RESULT OF:

4 3 5 6

.STOP

THIS TEST HAS BEEN HALTED,

STOP

IF YOU WANT TO END THIS SESSION, ENTER: )SAVE WHEN YOU SEE THE TIME, DATE, AND 'TUTOR' MESSAGE, ENTER: )OFF

,)SAVE

11:42:19 12/14/83 TUTOR

,)OFF

CONNECT= 01:10:27 VIRTCPU= 000:02.88 TOTCPU= 000:11.11

CONNECT= \$5.87 TOTCPU= \$1.85 SIO= \$0.41 TOTAL= \$8.13

MULT BY SHIFT FACTOR: =1(DAY), =0.6(EVE), =0.3(NIGHTS)

LOGOFF AT 11:42:42 PST WEDNESDAY 12/14/83

VM/370 ONLINE

# BIBLIOGRAPHY

Gilman, Leonard, and Rose, Allen J. APL-An Interactive Approach. 2nd ed. New York: John Wiley & Sons, Inc., 1974.

Ramsey, James B., and Musgrave, Gerald L. APL-STAT: A Do-it-yourself Guide to Computational Statistics Using APL-BELMONT, California: Lifetime Learning Publications, 1981.

# INITIAL DISTRIBUTION LIST

|    |   | No. | Copies |
|----|---|-----|--------|
| 1. | Defense Technical Information Center<br>Cameron Station<br>Alexandria, Virginia 22314   |     | 2      |
| 2. | Library, Code 0142<br>Naval Postgraduate School<br>Monterey, California 93943   |     | 2      |
| 3. | Dennis R. Mar. Code 0141<br>Naval Postgraiua te School<br>Monterey, California 93943  |     | 1      |
| 4. | LT Katherine S. Lanes<br>C/o Deputy Commander<br>Operational Test and Evaluation Force, Pacifi<br>Naval Air Station North Island<br>San Diego, California 92135 | c   | 1      |
| 5. | Professor R. R. Read, Code 55Re Naval Postgraduate School Nonterey, California 93983  |     | 1      |